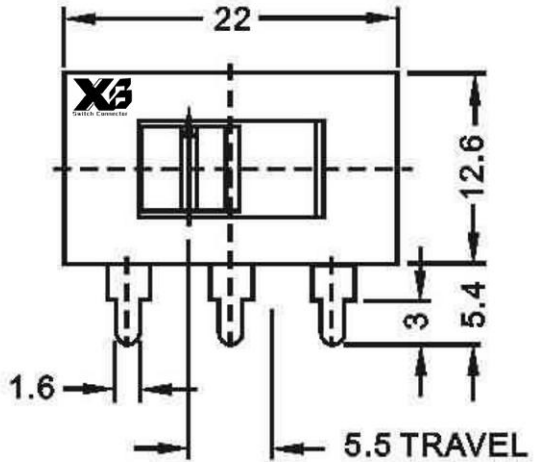
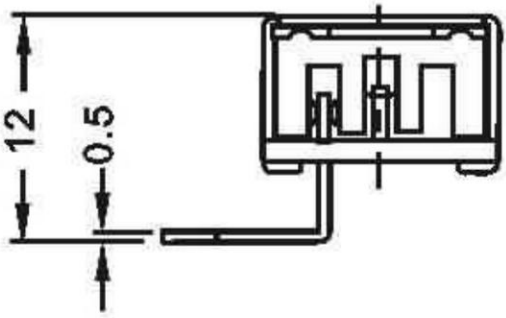
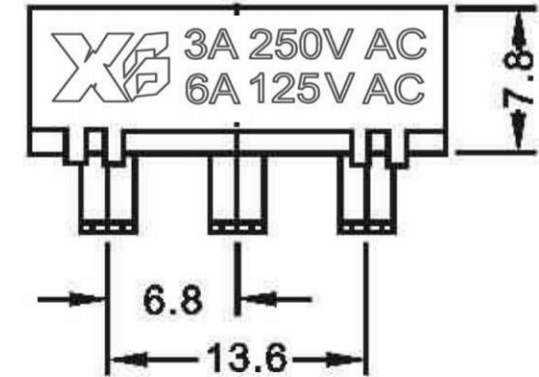



SCHEMATIC (NON-SHORTING)

SPECIFICATION (INITIAL)				
RATING: 3A 6A 125V 250V AC				
CONTACT RESISTANCE: Not more than 30mΩ				
INSULATION RESISTANCE:500MΩ at1500V DC				
WITHSTAND VOLTAGE:AC 500V for 1 min				
OPERATION FORCE: 300±100g				
SWITCHING LIFE:10000 Cycles(6-10c/m loading)				

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

XB Switch Connector					东莞市溪榜电子有限公司													
					DONG GUAN XI BANG ELECTRONICS CO.,LTD													
					TITLE : XB SLIDE SWITCH													
MODEL :XB-SS-22K47大电流拨动开关两档1P2T大功率三档滑动开关1P3T																		
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLBRANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3		ANGLE ±2°			7	SPRING	STEEL WIRE	1	NATURE			
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE							6	STEEL BALL	STEEL	1	NATURE			
VERSION		01	APPD.	FEI. LONG. HE	DATE							5	BOARD	PHENOLIC RESIN	1	NATURE		
										4	CONTACT CLIP	PBS STRIP	2	Ag PLATED				
										3	FRAME	IRON STRIP	1	Ni PLATED				
										2	TERMINAL	BRASS STRIP	8	Ag PLATED				
										1	KNOB	POM	1	BLACK				
										NO.	PART NAME	MATERIAL	QTY.	FINISHING				