



ROHS

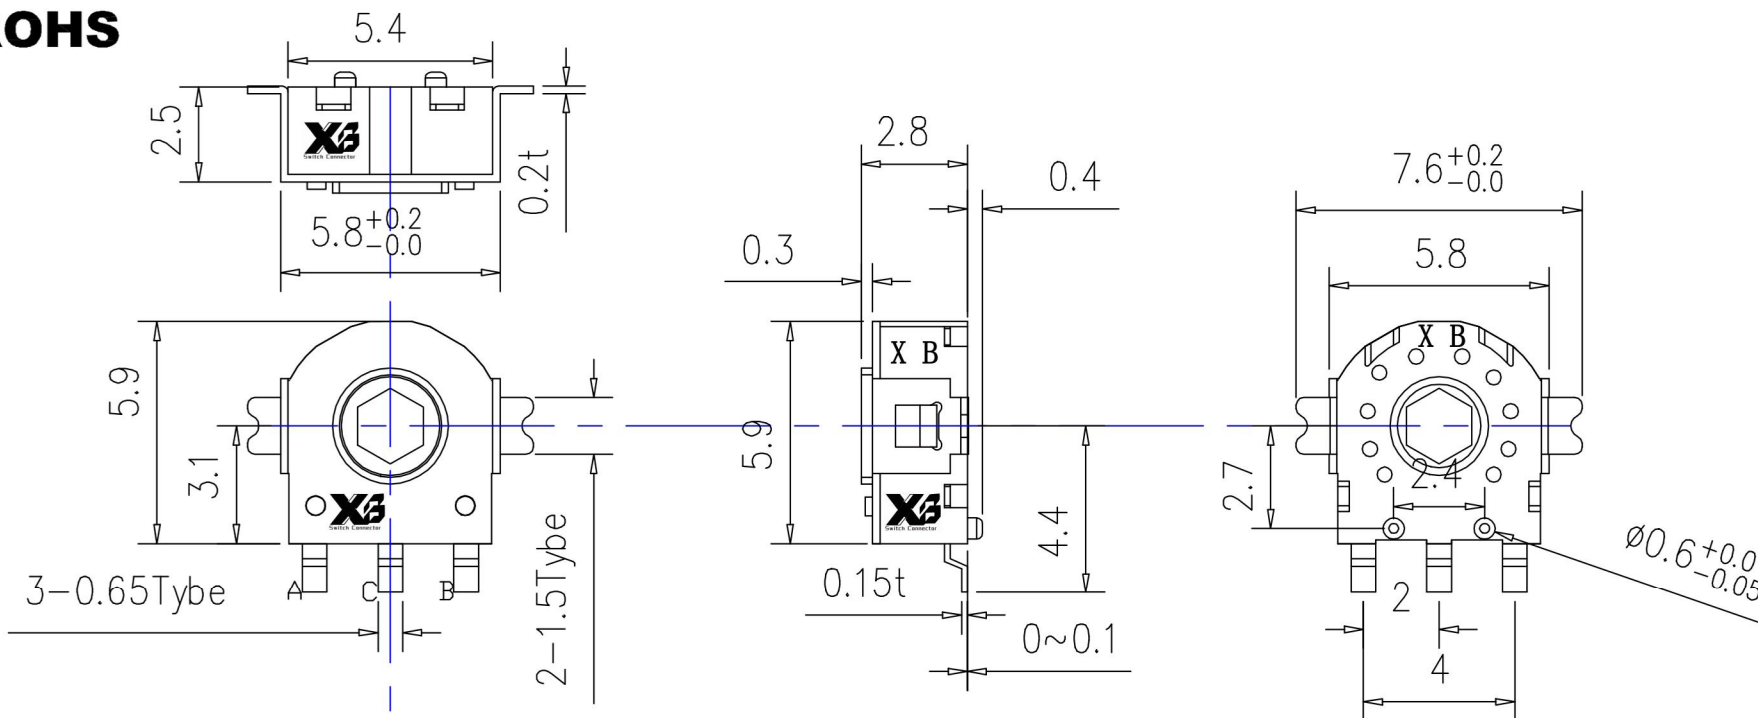

P.C.B Mounting holes detail

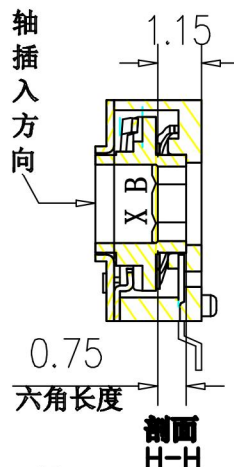

六角尺寸

气候等级 Climate grade	额定值 Rated values	接触电阻 Contact resistance	耐 压 Dielectric strength	绝缘电阻 Insulation resistance	按压力 Operating force	行程 Travel	寿 命 Life
-30℃~+85℃	Max50 mA12V DC Min10 μ A12V DC	$\leq 50m\Omega$	100V.AC. 1Min	$\geq 100M\Omega$	10gf $\pm$ 5gf	0.15 $\pm$ 0.05	100000次

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD. ANGEL'S

UNITS MM

DRAWN BY: GAO. PENG	DATE 02/24/23	MAT'L	TITLE ENCODER
CHECKED BY: PANG. DONG	DATE 02/24/23	FINISH	MODLE SMD旋转编码开关
APPROVED BY: YANG. JUN	DATE 02/24/23	SCALE 1 : 1	DWG NO. XB-EN-07
		SHEET NO. 1 of 1	PART NO. 5. 8x2. 8x5. 9MM

SIZE A4
VER R

ITEM NO.	DESCRIPTION	DRAWN	DATE
----------	-------------	-------	------