


**ROHS**

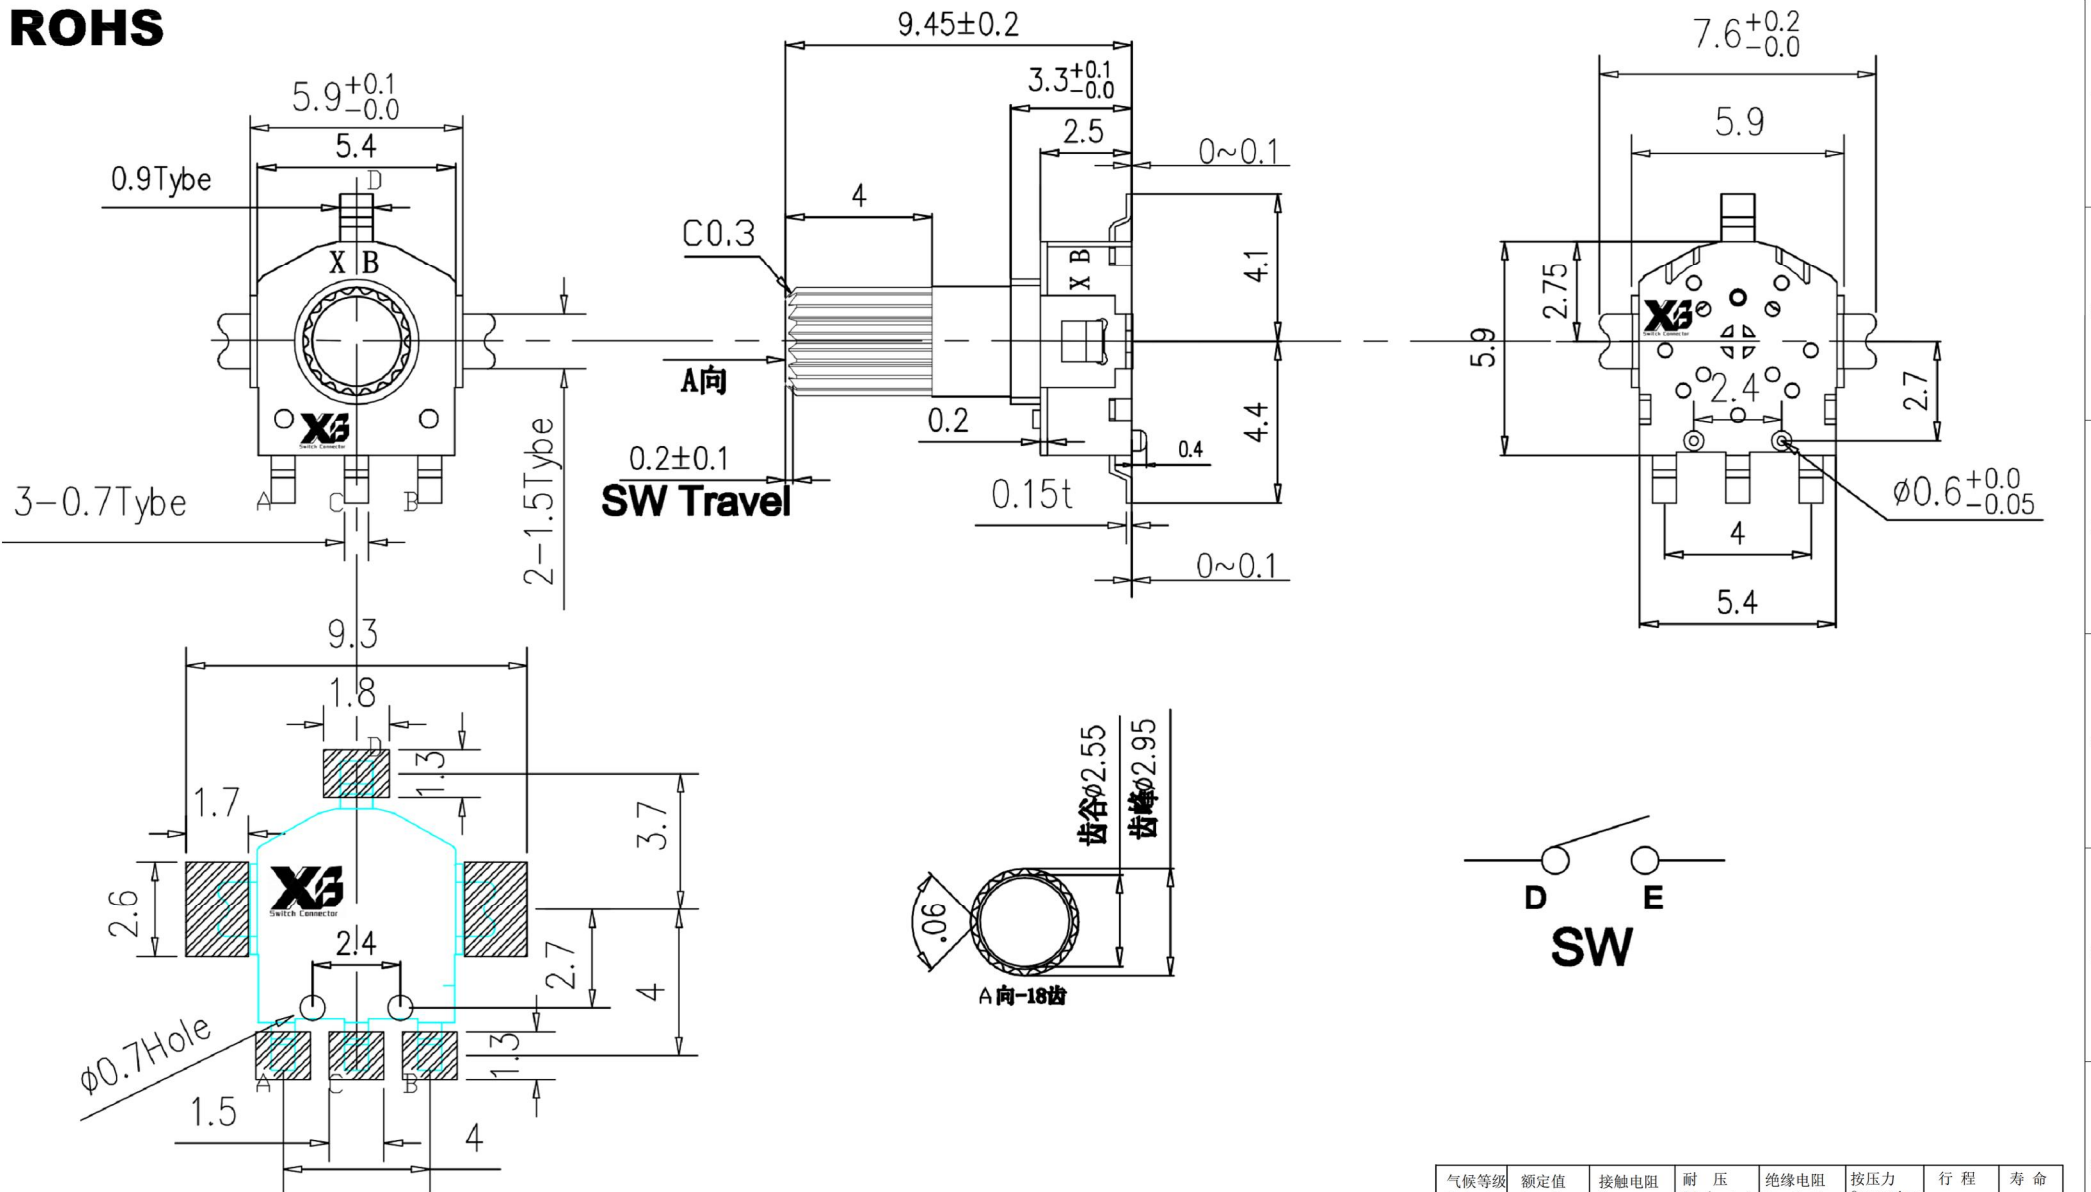

**P.C.B Mounting holes detail**

气候等级 Climate grade	额定值 Rated values	接触电阻 Contact resistance	耐压 Dielectric strength	绝缘电阻 Insulation resistance	按压力 Operating force	行程 Travel	寿命 Life
-30℃~+85℃	Max50 mA12V DC Min10 μA12V DC	≤50mΩ	100V. AC. 1Min	≥100MΩ	10gf±5gf	0.15±0.05	100000次

**XB** 东莞市溪榜电子有限公司  
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED:  
Up to 5 ±0.2  
Above 5 ~ 15 ±0.3  
Above 15 ~ 30 ±0.4  
Above 30 ~ 50 ±0.5  
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: GAO. PENG  
CHECKED BY: PANG. DONG  
APPROVED BY: YANG. JUN

DATE: 02/24/23  
DATE: 02/24/23  
DATE: 02/24/23

MAT'L	TITLE	ENCODER
FINISH	MODLE	贴片编码开关加长柄
SCALE: 1 : 1	DWG. NO.	XB-EN-07L
SHEET NO. 1 of 1	PART NO.	5. 9x5. 9x9. 45MM

ITEM NO.	DESCRIPTION	DRAWN	DATE