
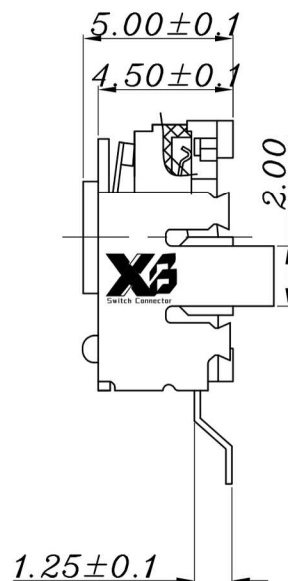



ROHS

外形圖 MECHANICAL DIMENSIONS

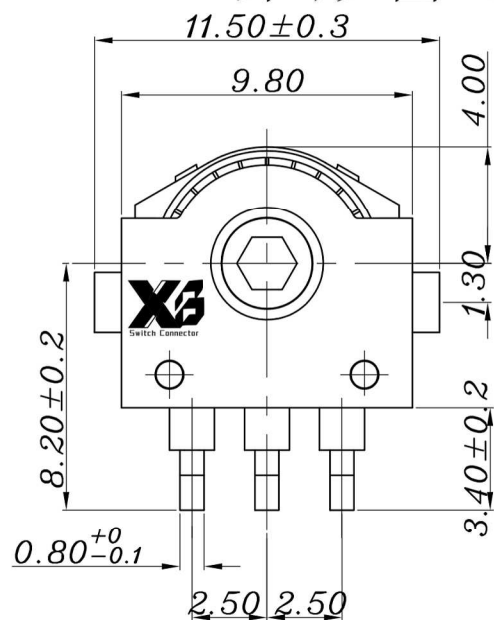



ENCODER OUTPUT SIGNAL

CW ROTATION

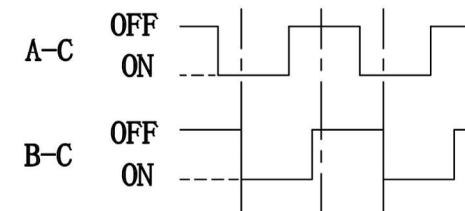

12 pulse 24 click

Recommended P.C.B layout

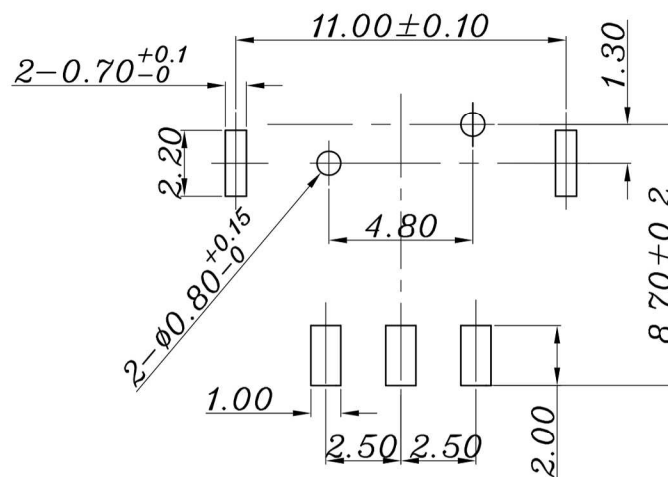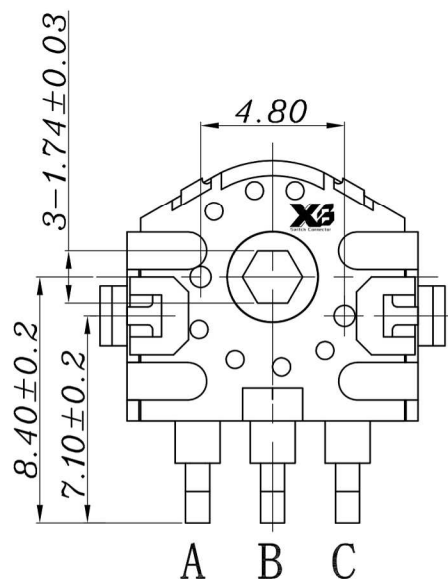

气候等级 Climate grade	额定值 Rated values	接触电阻 Contact resistance	耐 压 Dielectric strength	绝缘电阻 Insulation resistance	按压力 Operating force	行程 Travel	寿 命 Life
-30℃~+85℃	Max50 mA12V DC Min10 mA12V DC	≤50mΩ	100V. AC. 1Min	≥100MΩ	10gf±5gf	0.15±0.05	1000000次

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTDTOLERANCE UNLESS
OTHERWISE STATED:Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°3RD.
ANGEL'S

UNITS

MM

DRAWN BY:

GAO. PENG

DATE

02/24/23

CHECKED BY:

PANG. DONG

DATE

02/24/23

APPROVED BY:

YANG. JUN

DATE

02/24/23

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

ENCODER

旋转编码开关

XB-EN-08

SIZE

A4

VER

R