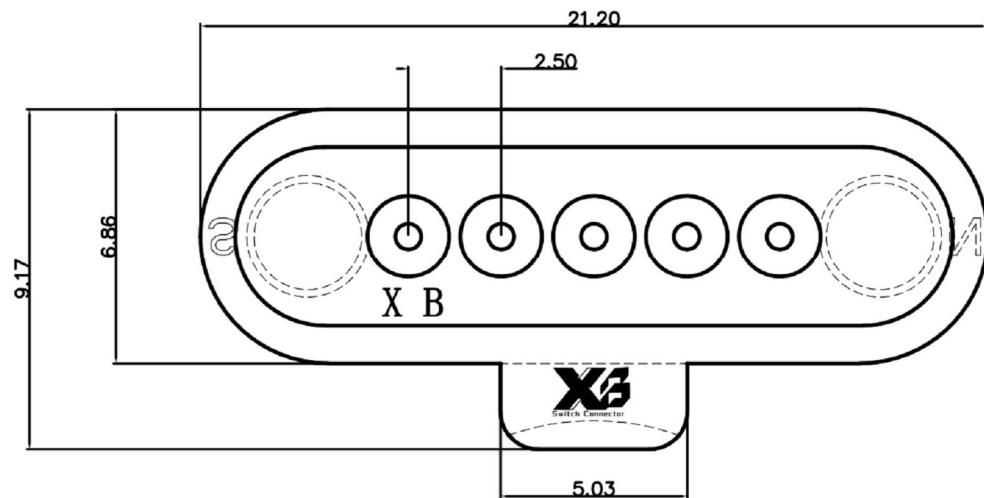


Note:

1: Material(材料):

Housing: PA9T(胶芯:PA9T)

Pin: Brass C3604 (针体: 黄铜 C3604)

Magnet: NdFeB (磁铁: 钕铁硼)

2: Plating(电镀):

Pin: 3u' Au over 50u'~80u' Ni
(针体: 镀金3u', 镍底50u'~80u'.)

Magnet : Zc plated (磁铁: 镀锌)

3: Electrical(电气特性):

Insulation Resistance: 1,000MΩ minimum.

(绝缘电阻: 1,000MΩ以上)

Dielectric Withstand Voltage: 500VAC/minute.

(抗击电压: 500VAC/minute)

4: WorkTemperature(工作环境):

Withstanding Higt Temperature: 280℃

Operational Temperature: ?20℃~ ?70℃

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS
OTHERWISE STATED:

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE
GAO. PENG 2024/5/26

CHECKED BY: DATE
HE. LONG. FEI 2024/5/26

APPROVED BY: DATE
PANG. DONG 2024/5/26

MAT'L		TITLE	CONNECTOR
FINISH		MODLE	POGO PIN
SCALE	1 : 1	DWG NO.	XB-PGC-CT-M-250D-5P
SHEET NO.	1 of 1	PART NO.	Thimble Connector
		SIZE	A4
		VER	R