

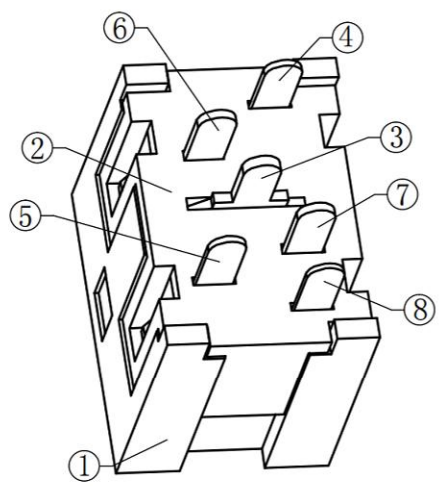
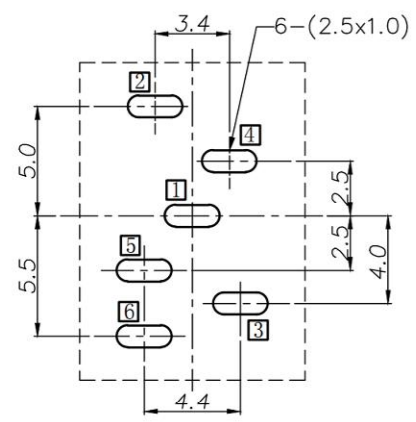
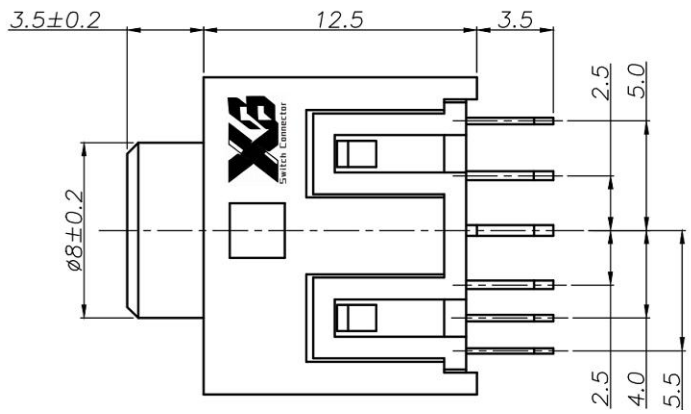
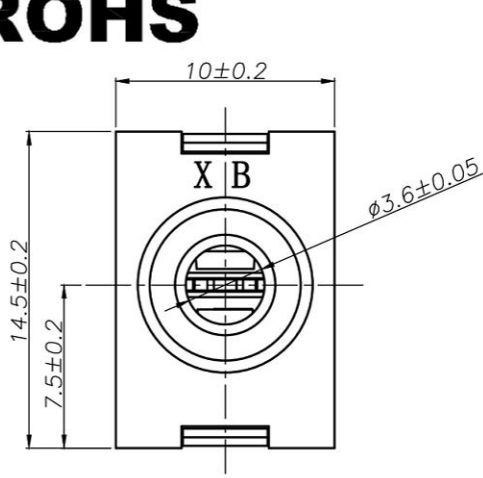


ROHS

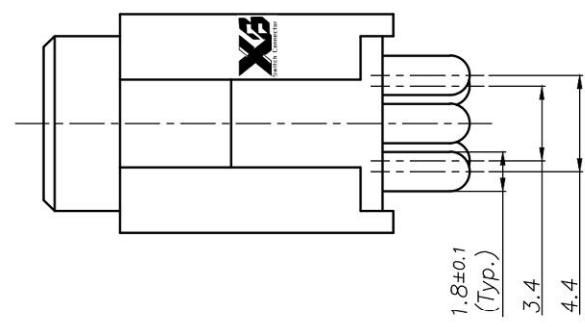

MATE PLUG

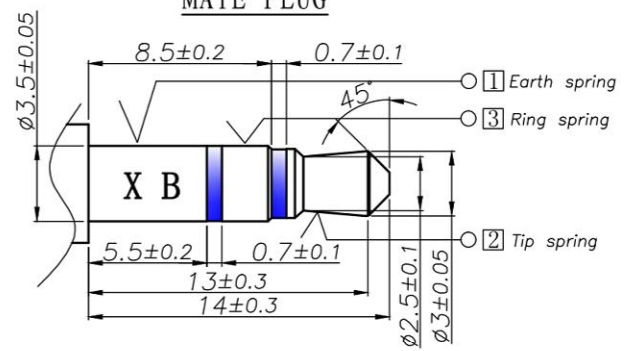

- Specification:
- 1. Rating : DC 30V 0.5A.
 - 2. Contact resistance: ≤30mΩ.
After life test: ≤50mΩ.
 - 3. Insulation resistance: ≥100MΩ (500VDC).
After life test: ≥50MΩ.
 - 4. Withstand voltage: 500VAC.
 - 5. Insertion and extraction force: 3N~30N.
 - 6. life test: 5000cycles min.
 - 7. Operation temperature range: -20℃~70℃.
 - 8. Preservative temperature range: -40℃~85℃.

SCHEMATIC

Model No.	PJ-3330	PJ-3330-A	PJ-3330-I	PJ-3330-B	PJ-3330-D	PJ-3330-S	PJ-3330-C
Schematic code							

⑧	Make terminal	⑥	1	C5191	PJ-3330-06(JA-668)	Silver/Gold plating
⑦	Shunt terminal	⑤	1	H62	PJ-3330-05(PP-665)	Silver/Gold plating
⑥	Shunt terminal	④	1	H62	PJ-3330-04(PP-666)	Silver/Gold plating
⑤	Ring spring	③	1	C5191	PJ-3330-03(TP-663)	Silver/Gold plating
④	Tip spring	②	1	C5191	PJ-3330-02(TP-664)	Silver/Gold plating
③	Earth spring	①	1	C5191	PJ-3330-01(JA-669)	Silver/Gold plating
②	Cover		1	PBT	PJ-3330-S2(GZ-667)	
①	Housing		1	PBT	PJ-3330-S1(ST-662)	
NO.	DESCRIPTION	QTY	MATERIAL	PART NO.	REMARK	

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB Audio jack

MODEL : XB-PJ-3330-6P

TOLERANCE
<=1.5mm ± 0.1
> 1.5mm ± 0.2
>=10.0mm ± 0.3

ANGLE TOL
± 2°

UNIT : MM	DWN.	ZENQ. CHEN	DATE						
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE						
VERSION	01	APPD.	FEI. LONG. HE	DATE					
2	TERMINAL	PBS STRIP	5	Ag PLATED					
1	HOUSING	PBT	1	BLACK					
NO.	PART NAME	MATERIAL	QTY	FINISHING					