
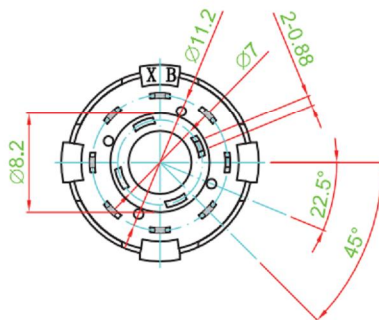
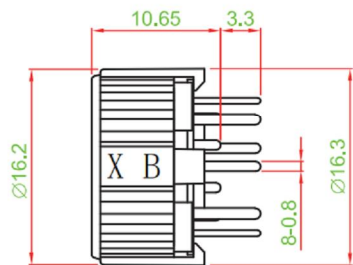



ROHS DIMENSION

RS - 18




CIRCUIT

RS-18




RS-24

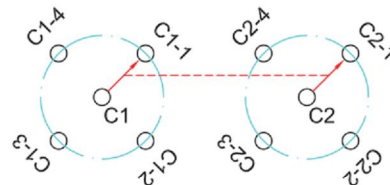


P.C.B. LAYOUT

RS-18

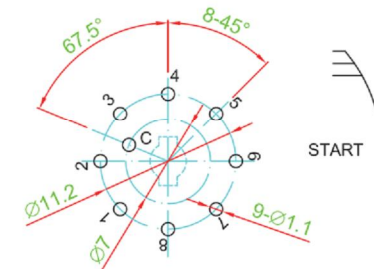

RS-24

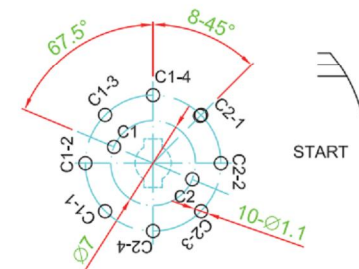

Application :

High value toy

Power strip voltage selector

Selection key on the application

AV machine, video recorder

POLE - POSITION	1P8T , 2P4T
CONTACT RATING	30 V DC , 0.5 A
CONTACT RESISTANCE	25 mΩ MAX. 1.5 V DC ; 100 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ MIN. 500 V DC
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 500 V AC for 1 Minute
OPERATING FORCE	1P8T : 1000 ± 300 gf.cm
OPERATING LIFE	10,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3°

3RD. ANGEL'S



UNITS

MM

DRAWN BY: GAO. PENG
CHECKED BY: PANG. DONG
APPROVED BY: YANG. JUN

DATE: 02/24/23
DATE: 02/24/23
DATE: 02/24/23

MAT'L
FINISH
SCALE
SHEET NO.

1 : 1
1 of 1

TITLE
MODLE
DWG NO.
PART NO.

ENCODER
ENCODER
XB-RS-18-(1P8T)
XB-RS-24 (2P4T)

SIZE
A4
VER
R