

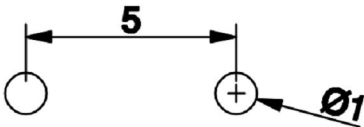
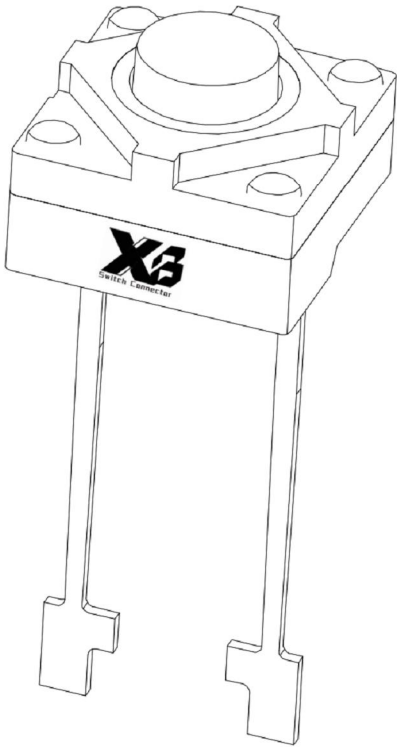
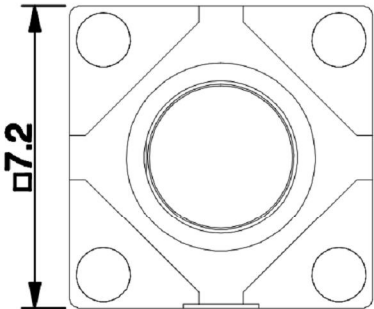
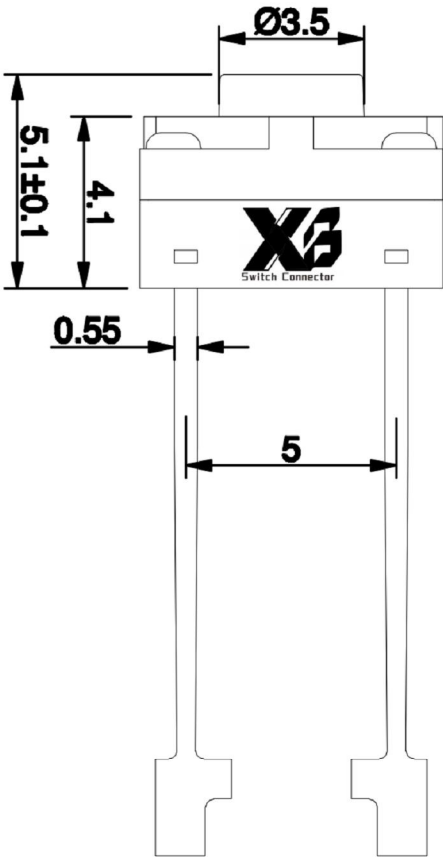


ROHS

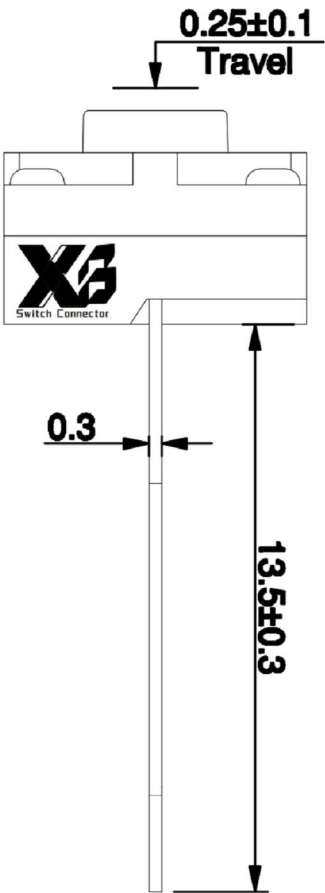

PCB LAYOUT MOUNTING PATTERN



CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	50mA 12VDC
Contact Resistance	100m Ω
Travel	0. 25 ± 0. 1mm
Operating Force	260 ± 50gf
Operating Life(cycles)	100,000 次

序号	名称	材料	数量	备注
A	卡件	黄铜 0.25	1	镀银
B	基座	PPA	1	清洗
C	簧片	不锈钢覆银	1	
D	按钮	硅胶	1	蓝色
E	盖板	不锈钢 0.15	1	清洗

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD															
					TITLE : XB TACT SWITCH						8	REEL	PS	1	BLUE
					MODEL : XB-TS-1172-05 防水开关两脚 智能马桶开关 7. 2x7. 2x5mm						7	CARRIER	PS	1	CLEAR
UNIT : MM		DWN.		DATE		TOLERANCE <=1. 5mm ± 0. 1 > 1. 5mm ± 0. 2 >=10. 0mm ± 0. 3	ANGLE TOL ± 2°	6	COVER TAPE	PS	1	CLEAR			
SCALE : 5 : 1		CHK'D		DATE				5	CONTACT	PBS STRIP	1	Ag CLAD			
VERSION		01	APPD.	DATE				4	COVER	IRON STRIP	1	Ni PLATED			
								3	CASE	NYLON	1	BLACK			
								2	TERMINAL	BRASS STRIP	2	Ag PLATED			
								1	KNOB	NYLON	1	BLACK			
								NO.	PART NAME	MATERIAL	QTY.	FINISHING			