

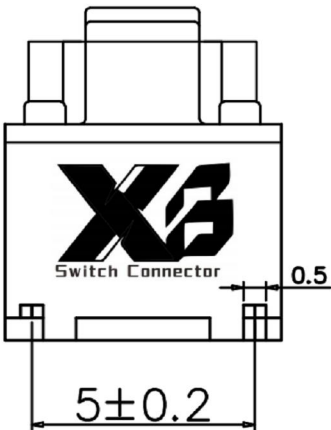
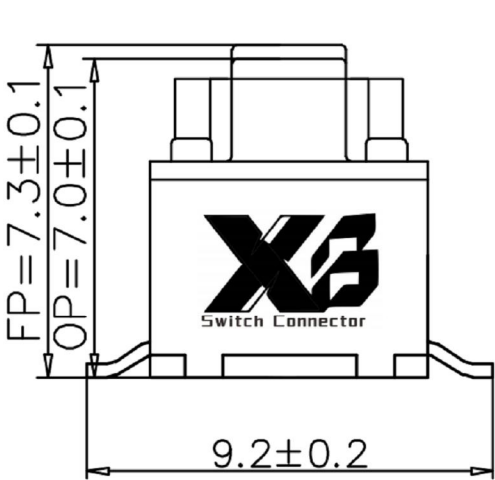
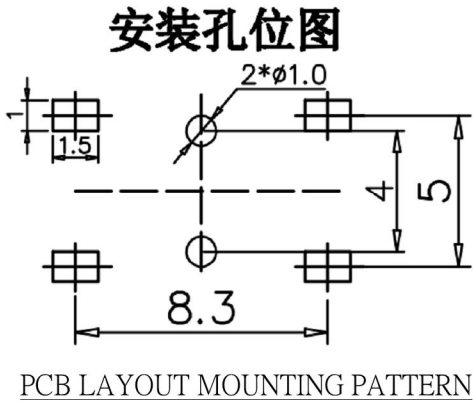
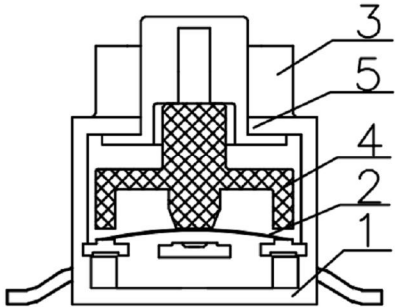


ROHS

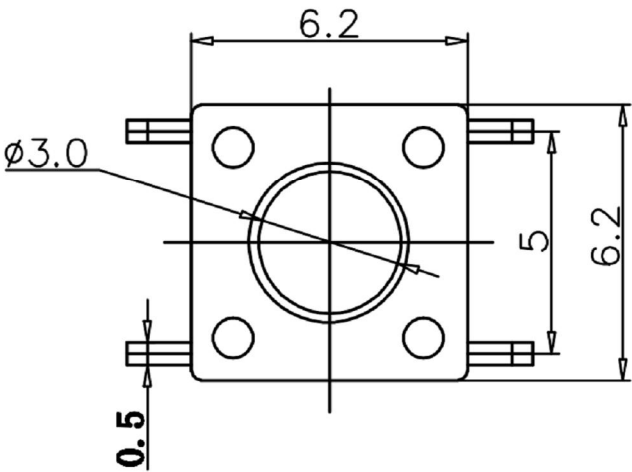

SPECIFICATIONS

Rating	DC 12V 50mA
Contact Resistance	100mΩ Max.
Travel	0.3 ± 0.1mm
Operating Force	75gf ± 5gf
Operating Life(cycles)	100,000

5	HSa6.0428.035-5	按钮	1	PPA
4	HSa6.0428.018-4	按垫	1	橡胶
3	HSa6.0428.030-3	盖板	1	PPA(黑)
2	HSa6.0428.005-2	簧片	1	不锈钢复银
1	HSa6.0428.025-1	底座组	1	PPA(黑) 黄铜带H65Y0.3mm
序号	编号	材料	数量	材料

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

					东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD									
TITLE : XB TACT SWITCH					TOLERANCE					ANGLE TOL				
MODEL : XB-TS-4DV073 贴片开关有声/无声 6.2x6.2x7.3mm					<=1.5mm ± 0.1					± 2°				
UNIT : MM					DWN.					DATE				
SCALE : 5 : 1					CHK'D					DATE				
VERSION : 01					APPD.					DATE				
8 REEL					PS					1 BLUE				
7 CARRIER					PS					1 CLEAR				
6 COVER TAPE					PS					1 CLEAR				
5 CONTACT					PBS STRIP					1 Ag CLAD				
4 COVER					IRON STRIP					1 Ni PLATED				
3 CASE					NYLON					1 BLACK				
2 TERMINAL					BRASS STRIP					2 Ag PLATED				
1 KNOB					NYLON					1 BLACK				
NO. PART NAME					MATERIAL					QTY. FINISHING				