

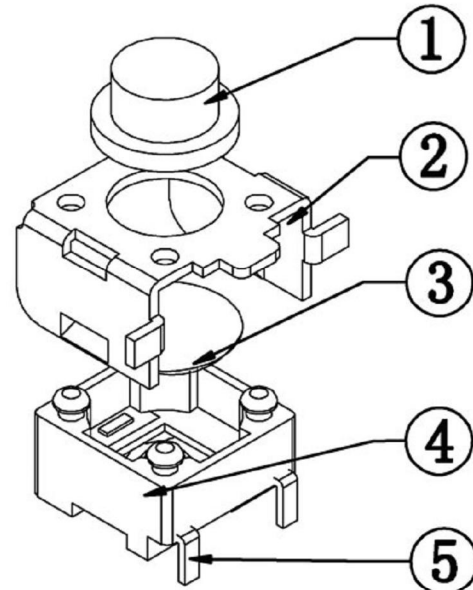
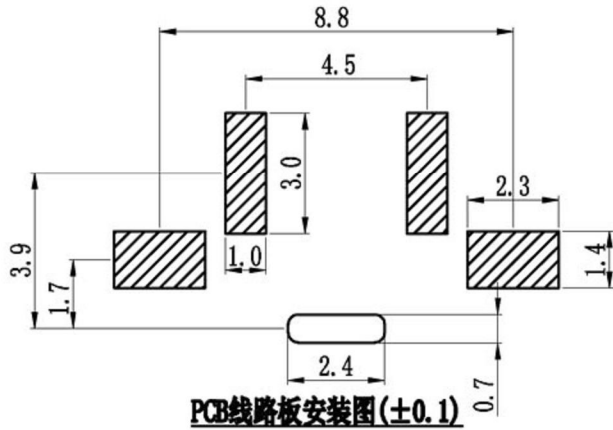
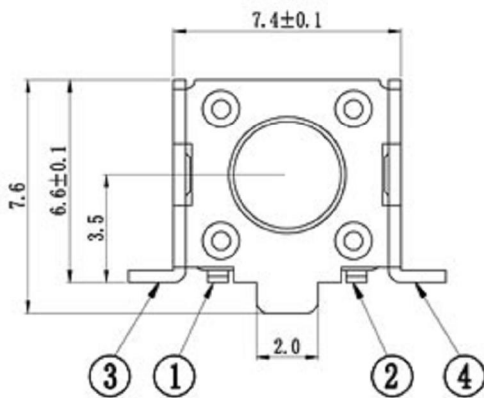



ROHS

>15.0	ø3.0	
15.0	ø3.0	13.85
14.0	ø3.0	12.85
13.0	ø3.0	11.85
12.5	ø3.0	11.35
12.0	ø3.0	10.85
11.5	ø3.0	10.35
11.0	ø3.0	9.85
10.5	ø3.0	9.35
10.0	ø3.2	8.85
9.5	ø3.2	8.35
9.0	ø3.2	7.85
8.5	ø3.3	7.35
8.0	ø3.3	6.85
7.5	ø3.3	6.35
7.0	ø3.3	5.85
6.5	ø3.3	5.35
6.0	ø3.3	4.85
5.5	ø3.3	4.35
5.0	ø3.5	3.85
4.3	ø3.5	3.15
帽头H	直径A	脚中心L
单位 (mm)	单位 (mm)	单位 (mm)

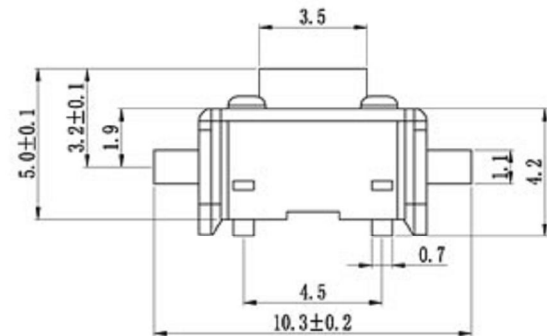

- 技术参数:
- 1. 做用温度: -25~+85℃;
 - 2. 额定负荷: DC 12V 50mA;
 - 3. 接触电阻: ≤50mΩ;
 - 4. 绝缘电阻: ≥100MΩ;
 - 5. 耐 压: AC250V (50Hz)/min;
 - 6. 动 作 力: 250g±50g;
 - 7. 使用寿命: 100000次;
 - 8. 未注尺寸公差参照下面表格。



电路图

5	接触脚	黄铜	镀银	1
4	基座	PPA (黑色)	——	1
3	支架	冷轧钢带	铜锡	1
2	簧片	不锈钢	镀银	1
1	按钮	PPA (黑色)	——	1
序号	零件名称	材料规格	表面处理	数量

 Switch Connector					东莞市溪榜电子有限公司									
					DONG GUAN XI BANG ELECTRONICS CO.,LTD									
					TITLE : XB TACT SWITCH									
MODEL : XB-TS-7476-H5 贴片轻触开关支架中心高3.5MM														
UNIT : MM		DWN.	ZENQ. CHEN	DATE			TOLERANCE <=1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3	ANGLE TOL ± 2°	8	REEL	PS	1	BLUE	
SCALE : 5 : 1		CHK'D	PENG. GAO	DATE					7	CARRIER	PS	1	CLEAR	
VERSION		01	APPD.	FEI. LONG. HE	DATE				6	COVER TAPE	PS	1	CLEAR	
									5	CONTACT	PBS STRIP	1	Ag CLAD	
									4	COVER	IRON STRIP	1	Ni PLATED	
									3	CASE	NYLON	1	BLACK	
									2	TERMINAL	BRASS STRIP	2	Ag PLATED	
									1	KNOB	NYLON	1	BLACK	
									NO.	PART NAME	MATERIAL	QTY.	FINISHING	