

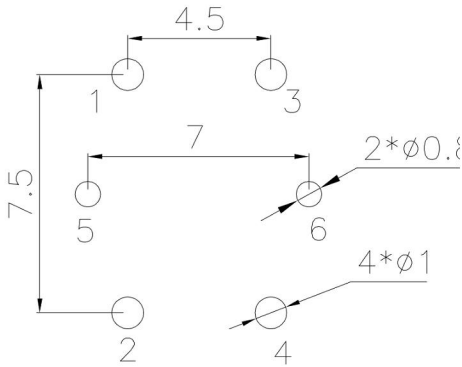
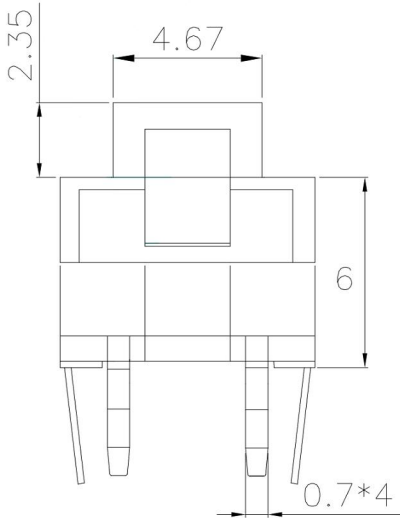
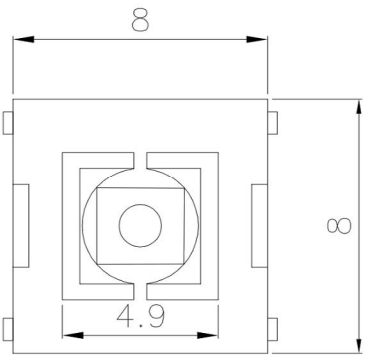


ROHS

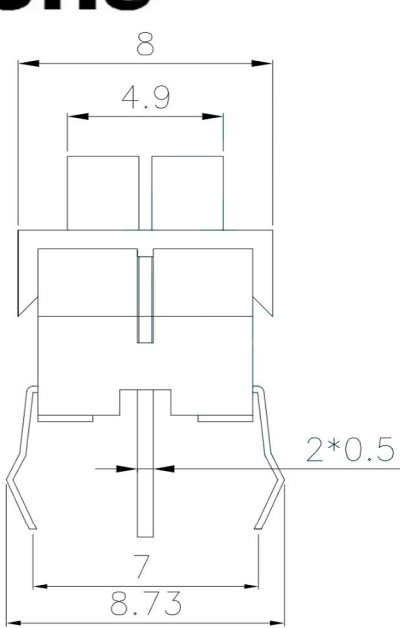

HOLE LAYOUT
(BOTTOM VIEW)

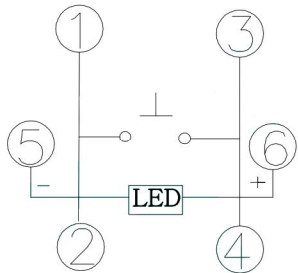


SCHEMATIC (SHORTING)

LED colour(LED颜色)
Whiler(白色)
Red(红色)
Blue(蓝色)
Green(普绿)

Typical Specifications
1.Rating : DC 12V 50mA
2.Operating Force : 250 ± 50 gf
3.Contact Resistance : 100mΩMAX
4.Life : 100,000 Cycles Min

⑦	LED	—	1	—	Transparent
⑥	Keystoke	—	1	PA66	White
⑤	Spring	—	1	Keystoke	Ag
④	Base	—	1	PA66	Black
③	Cover	—	1	PA66	Black
②	Terminal	—	6	Phosphor bronze	Ag Plating
①	Housing	—	1	Nylon	Black
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

Switch Connector					东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD											
TITLE : XB LED TACT SWITCH																
MODEL : XB-TS-LED-8085 立式带灯开关8X8X8.5																
UNIT : MM		DWN.	GAO. PENG	DATE			TOLERANCE <=1.5mm ± 0.1 > 1.5mm ± 0.2 >=10.0mm ± 0.3	ANGLE TOL ± 2°			8	REEL	PS	1	BLUE	
SCALE : 5 : 1		CHK'D	PANG. DONG	DATE							7	CARRIER	PS	1	CLEAR	
VERSION		01	APPD.	HE. LONG. FEI	DATE						6	COVER TAPE	PS	1	CLEAR	
											5	CONTACT	PBS STRIP	1	Ag CLAD	
												4	COVER	IRON STRIP	1	Ni PLATED
												3	CASE	NYLON	1	BLACK
												2	TERMINAL	BRASS STRIP	2	Ag PLATED
												1	KNOB	NYLON	1	BLACK
												NO.	PART NAME	MATERIAL	QTY.	FINISHING