
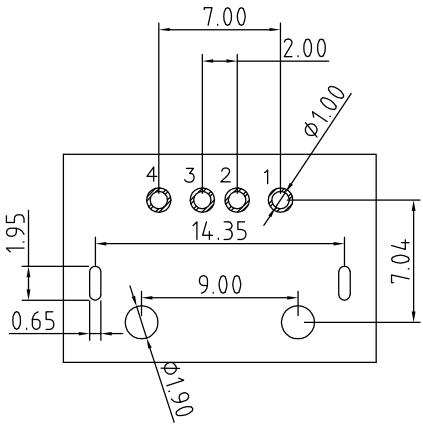
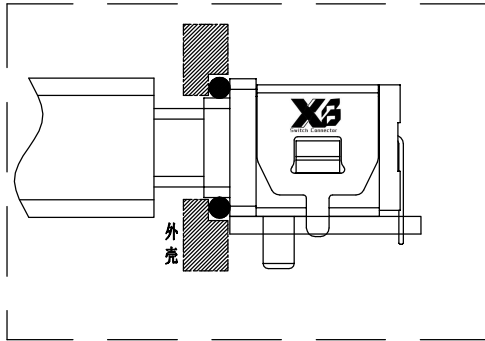


CAD GENERATED DRAWING. DON'T CHANGE BY HAND




REV	ECN. NO.	APPJ



RECOMMENDED PCB LAYOUT(TOP VIEW)
DEFAULT TOLERANCE+/-0.05
THICKNESS T=1.0mm

PIN ASSIGNMENT

PIN NO.	1	2	3	4
SIGNAL NAME	GND	D+	D-	VBUS

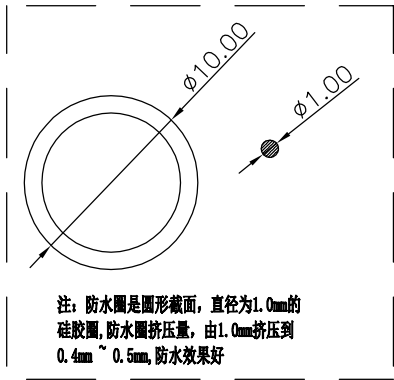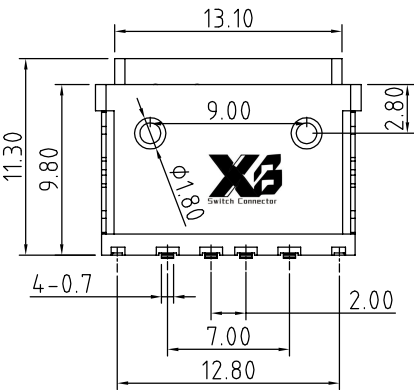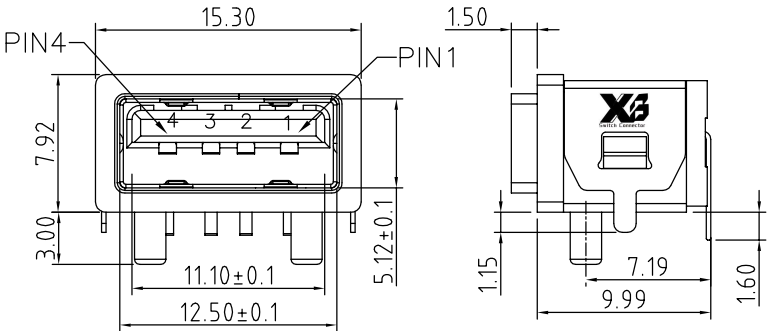


注：防水圈是圆形截面，直径为1.0mm的
硅胶圈，防水圈挤压力，由1.0mm挤压到
0.4mm ~ 0.5mm，防水效果好

规格书

1. 额定电流 3.0A
2. 耐电压 500VAC
3. 工作温度范围 -30 °C ~ 85 °C
4. 接触阻抗 接触阻抗≤30mΩ
5. 绝缘阻抗 绝缘阻抗≥1000MΩ
6. 插入力 :8N~35N
7. 拔出力 8N~35N
8. 插拔耐久1500 CYCLES

ITEM	PART NAME	Q'TY	FINISH	NOTE
3	Shell	1	SUS 301 1/4H	
3	PLASTIC Shell	1	PA9T&LCP (G.F30%)	
2	Contact	4	BRASS C2680-EH Au/Ni Plating T=0.25mm	
1	Housing	1	PA10T (G.F30%)	

X. ±0.50	X* ±2°	UNITS mm		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD									
.X ±0.30	.X* ±1°												
.XX ±0.10	.XX* ±0.5°	MAT'L 	PART NO. XB-USB-A-1195B-IPX7	LE: IP68 1195B USB 2.0 A TYPE									
.XXX ±0.05													
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XI BANG ELECTRONIC TECHNOLOGY CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XI BANG ELECTRONIC TECHNOLOGY CO., LTD		FINISH 	APPD: GAO. PENG	DWG NO: XB-USB-A-1195B									
		Q'TY 	CHKD: HE. LONG. FEI	 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1/1</td><td>1/2</td><td>A2</td></tr></table>				SCALE	SHEET	REV.	1/1	1/2	A2
			SCALE					SHEET	REV.				
			1/1					1/2	A2				
		DR: PANG. DONG											