
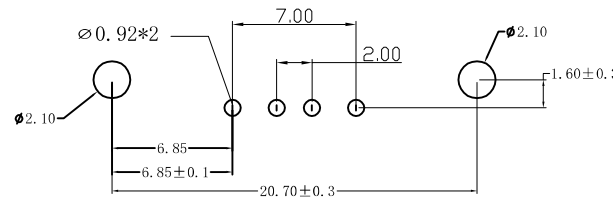
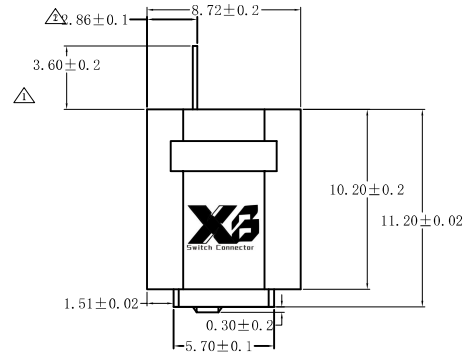
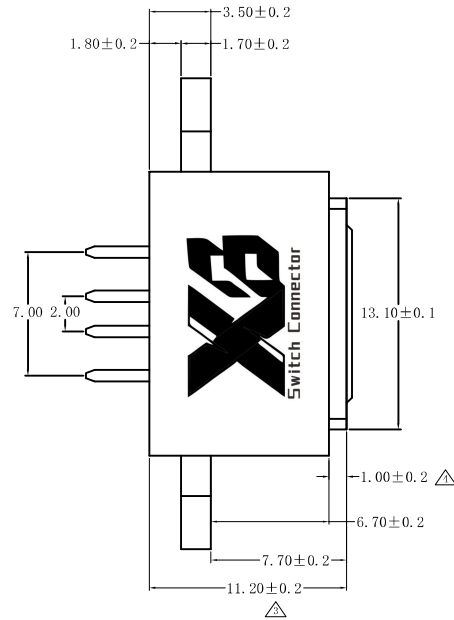


RoHS DIRECTIVE

REV.	ECN. NO.	DESCRIPTION	DATE	DESIGN
A1	2012. 12. 26	锁耳设变	16. 12. 26	

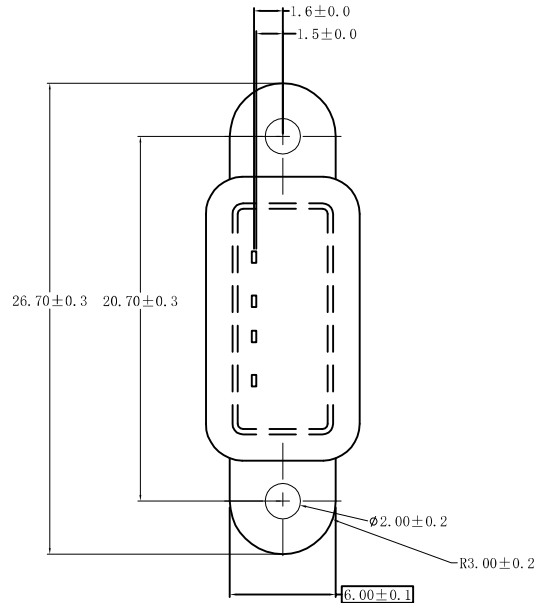

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.5A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
30 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf (MAX)
Unmate force: 1.02kgf (MIN)
2. 端子保持力: Terminal Retention
1.2kgf (MIN)

原材料: Material:

1. 塑胶: Housing:
Hing Temperature Tnermaplastics,
Ul 94V-0 PBT White/Black
2. 端子: Contact: Copper Alloy C2680
3. 外壳: Shell: Copper Alloy C2680

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Talls
2. 外壳: Shell:
Nickel Plating

DIM	TOL	DIM	TOL
X.	±0.35	X°	±1°
X.X	±0.25	X.X°	±0.5°
X.XX	±0.15	X.XX°	
X.XXX	±0.10	X.XXX°	

UNITS mm	NAME (INTENDED USE) USB	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
MAT'L 材质	PART NO. (INTENDED USE) XB-USB-A-F 180-E-F	TITLE: USB A-F 180° 防水 (L=11.2) 有耳无边			
FINISH 硬度	APPD: GAO. PENG	DWG NO.: XB-USB-A-F 180-E-F			
Q'TY 数量	CHKD: HE. LONG. FEI	角法 PROJ. 			
	DR: PANG. DONG	SCALE 1/1	SHEET 1/1	REV. A2	