

F

E

D

C

B

A

F




E

D




C

B

A

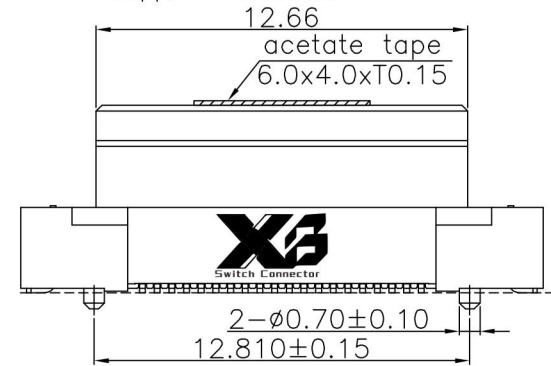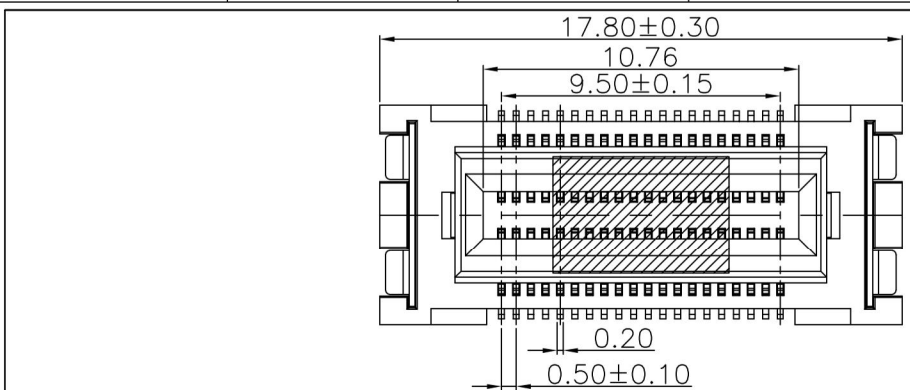


★ 0.12

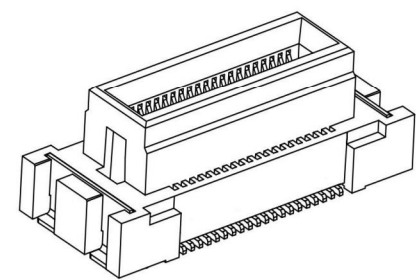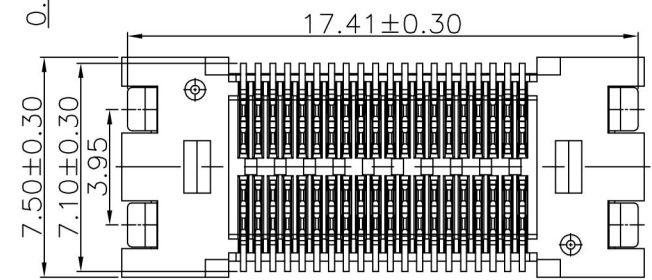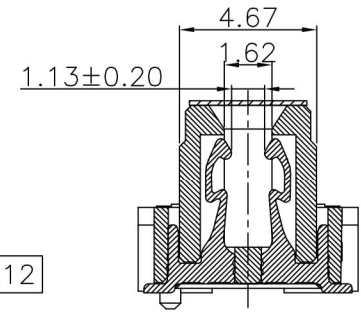

Specifications
Current Rating:0.4Amp
Insulation Resistance:500MΩMin.
Dielectric Withstanding Voltage:250VAC/60S
Contact Resistance:100mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
★ All materials must meet XI BANG hazardous substances control standards.
“★”: Critical Characteristics. indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
“☆”:Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Recommended P.C.Board Layout
(Tolerance:±0.05)

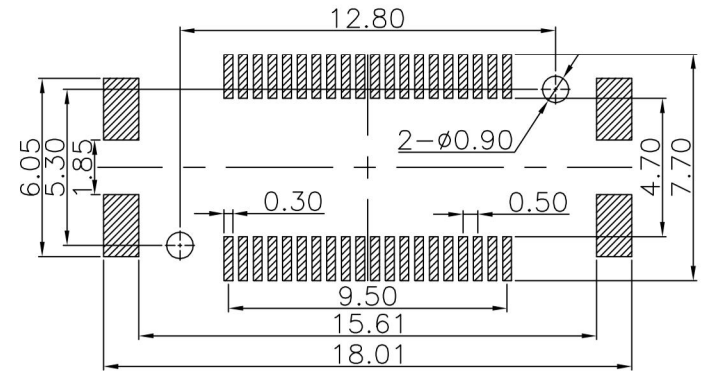

Ordering Information

229 - XX XX B 001 C 1 N X

No. of Pins per Row 20
Standard Plating 79=5u"AU/80~160u"MATTE TIN
75=0.6u"AU/80~160u"MATTE TIN
Color 1=Black
Standard Packing H=Acetate Tape+Tape&Reel

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

3RD.ANG PROJ.
PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
XB-CBAC-229
PART NO.

TITLE.
0.5mm PITCH BTB FLOATING CONNECTOR

REV. A
UNIT. mm
SCALE. 4:1