


Specifications
 Current Rating:1.0Amp
 Insulation Resistance:500MΩMin.
 Dielectric Withstanding Voltage:250VAC
 Contact Resistance:100mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

★All materials must meet XI BANG hazardous substances control standards.
 ★: Critical Characteristics.
 indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 ☆: Safety Features
 indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

與CBZZ202系列配對使用

Recommended P.C.Board Layout
 (Tolerance:±0.05)

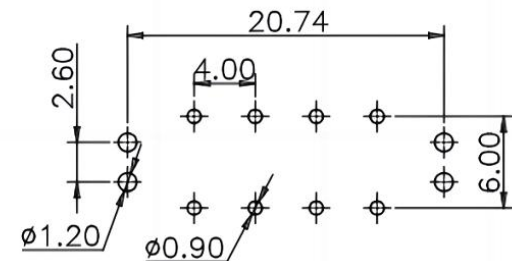

Ordering Information

202 - 04 XX A 001 C 1 S X

No. Of Pins Per Row 04
 Standard Plating 08=5u"gold on contact/
 gold flash on other area
 Color 1=Black
 Standard Packing H=Acetate tape+Tape&Reel

XB 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONI CS CO., LTD.

3RD.ANG PROJ.

 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0*	X.±0.30
.X*±3.0*	.X±0.25
.XX*±2.0*	.XX±0.15
.XXX*±1.0*	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. XB-CBZZ-202
PART NO. XB-CBZZ-202

TITLE. 4.00mm PITCH MALE FLOATING CONNECTOR MATING H25.00mm
--

REV. A	UNIT. mm	SCALE. 3:1
--------	----------	------------