
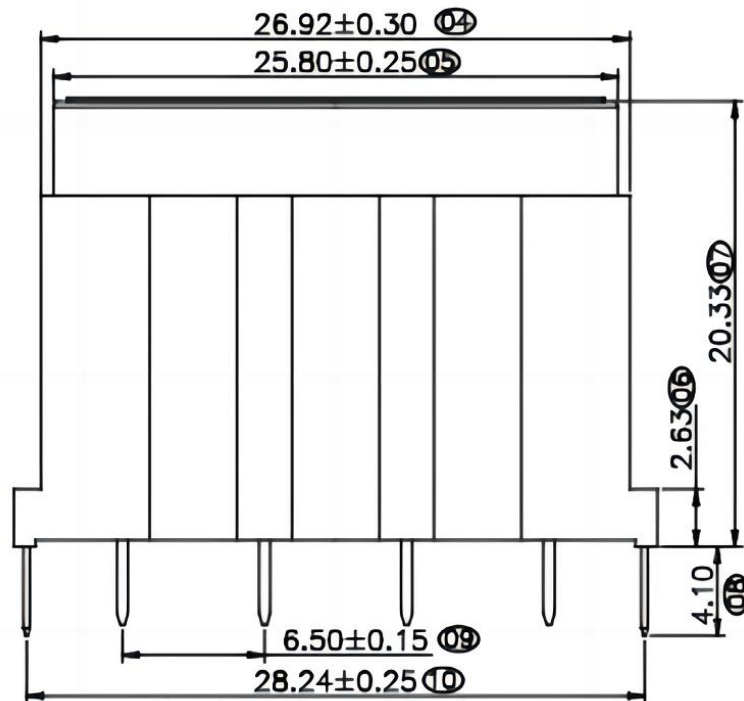


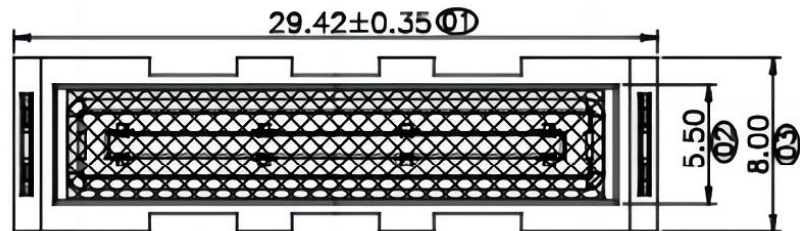

Ordering Information

G BZZ203 - 04 XX A 001 C 1 S X


No. of Pins per Row
04

Standard Plating
08=5u"gold on contact/
gold flash on other area

Color
1=Black

Standard Packing
H=Acetate tape+Tape&Reel

Acetate tape
24.50x5.00

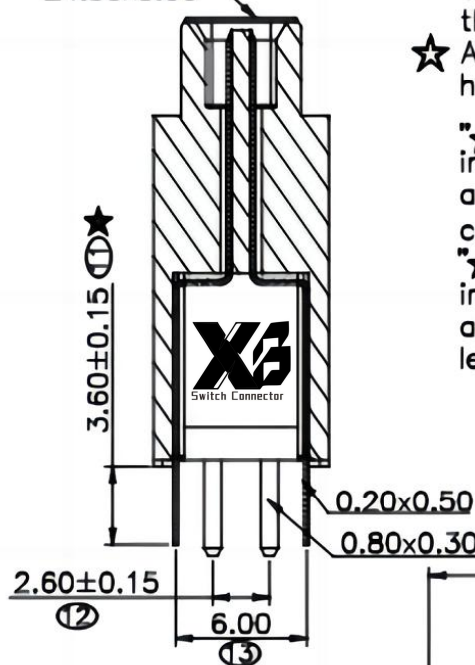

Specifications

Current Rating:1.0Amp

Insulation Resistance:500MΩMin.

Dielectric Withstanding Voltage:250VAC

Contact Resistance:100mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 LCP or


the equivalent material

★ All materials must meet XI BANG
hazardous substances control standards.

★: Critical Characteristics,
indicates product characteristics, functionalities,
and manufacturing processes regarding to
customer's specifications


★: Safety Features
indicates product characteristics, functionalities,
and manufacturing processes complying to
legal regulations stated by local government

Recommended P.C.Board
Layout
(Tolerance:±0.05)

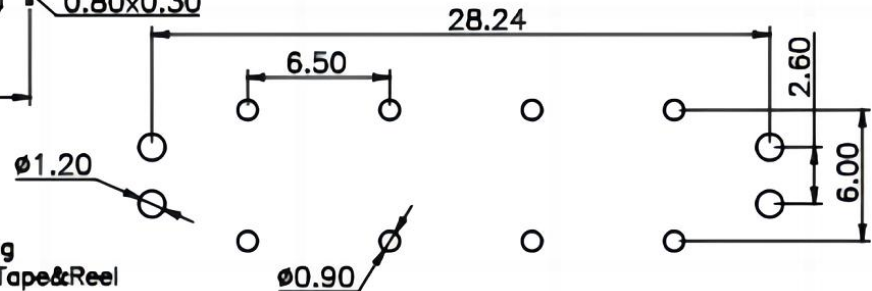

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

3RD.ANG
PROJ.



PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X'±3.0°	.X±0.25
.XX'±2.0°	.XX±0.15
.XXX'±1.0°	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

XB-CBZZ-203

PART NO.

XB-CBZZ-203

TITLE.

**6.50mm PITCH MALE
FLOATING CONNECTOR
MATING H25.00mm**

REV. A

UNIT. mm

SCALE. 3:1