

Ordering Information

201 - XX XX B 002 C 1 9 X

No. Of Pins Per Row
15/20/30/40/50/60/70/80

Standard Plating
02=Gold Flash
06=6u*AU/Gold Flash
09=3u*AU/Gold Flash

Color
1=Black

Standard Packing
H=Acetate tape+Tape&Reel


Specifications
Current Rating:0.4Amp
Insulation Resistance:100MΩMin.
Dielectric Withstanding Voltage:250VAC
Contact Resistance:80mΩMax.
Operating Temperature:-40°C to +105°C

Materials
Contact Material:copper alloy
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
All materials must meet XI BANG hazardous substances control standards.

★: Critical Characteristics, indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

★: Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Recommended P.C.Board Layout
(Tolerance:±0.05)

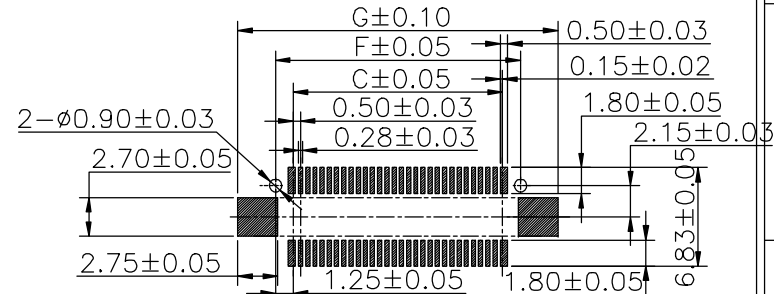

| | | | | | | | | |
|-----|----------------|-------|-------|-------|-------|-------|-------|-------|
| 本规格 | 80 | 46.40 | 44.50 | 39.50 | 28.50 | 42.60 | 42.00 | 47.20 |
| 本规格 | 70 | 41.40 | 39.50 | 34.50 | 28.50 | 37.60 | 37.00 | 42.20 |
| 本规格 | 60 | 36.40 | 34.50 | 29.50 | 28.50 | 32.60 | 32.00 | 37.20 |
| 已规格 | 50 | 31.40 | 29.50 | 24.50 | 28.50 | 27.60 | 27.00 | 32.20 |
| 本规格 | 40 | 26.40 | 24.50 | 19.50 | 11.00 | 22.60 | 22.00 | 27.20 |
| 本规格 | 30 | 21.40 | 19.50 | 14.50 | 11.00 | 17.60 | 17.00 | 22.20 |
| 本规格 | 20 | 16.40 | 14.50 | 9.50 | 11.00 | 12.60 | 12.00 | 17.20 |
| 已规格 | 15 | 13.90 | 12.00 | 7.00 | 11.00 | 10.10 | 9.50 | 14.70 |
| 备注 | No. of PIN/ROW | A | B | C | D | E | F | G |

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

3RD.ANG PROJ.
PAGE. 1/1

| GENERAL TOLERANCE | |
|-------------------|-----------|
| X'±5.0' | X.±0.35 |
| .X'±3.0' | .X±0.30 |
| .XX'±2.0' | .XX±0.20 |
| .XXX'±1.0' | .XXX±0.10 |

DESIGNED:
CHECKED:
APPROVED:

DATE:
DATE:
DATE:

DWG. NO.
XB-CGAC-201-B002
PART NO.

TITLE:
0.5mm PITCH BTB
FLOATING CONNECTOR

REV. A UNIT. mm SCALE. 2:1