

Specifications
 Current Rating:0.4Amp
 Insulation Resistance:500MΩMin.
 Dielectric Withstanding Voltage:250VAC/60S
 Contact Resistance:100mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Phosphor Bronze
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material

☆All materials must meet XI BANG hazardous substances control standards.



“★” : Critical Characteristics, indicates product characteristics, functionalities, and manufacturing processes regarding to customer’s specifications

“☆” :Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Ordering Information

229 - XX XX B 001 C 1 N X

No. of Pins per Row 20
 Standard Plating 02=Gold Flash
 Color 1=Black
 Standard Packing F=CAP+Tape&Ree

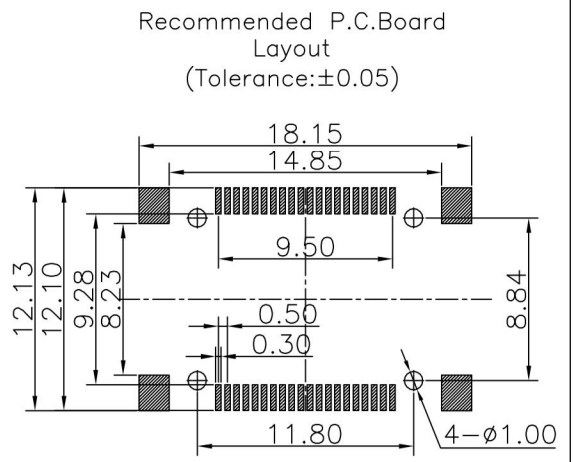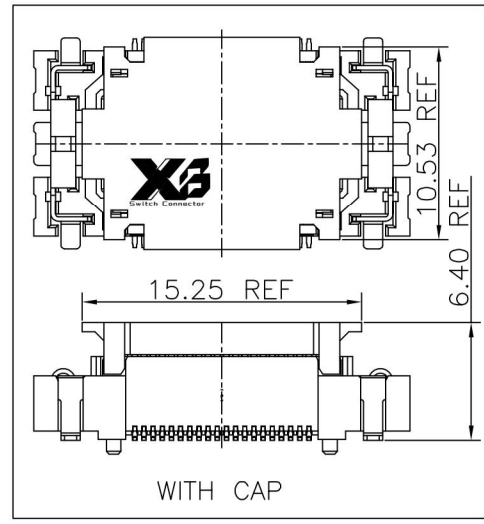

XB 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.	XB-GBAC-229
PART NO.	

TITLE.	0.5mm PITCH BTB FLOATING CONNECTOR

REV. B	UNIT. mm	SCALE. 2.5:1	PAGE. 1/1	
--------	----------	--------------	-----------	--