
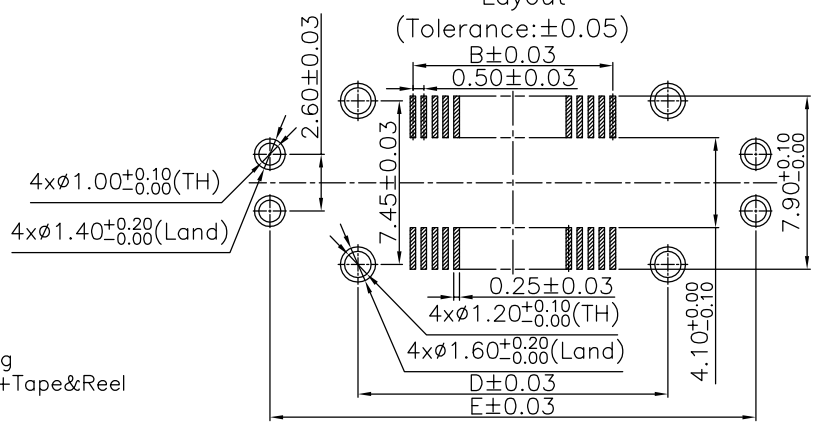
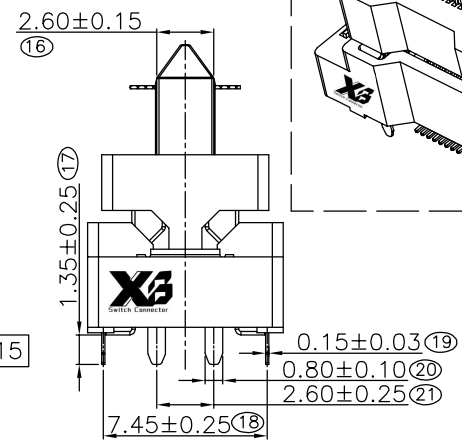
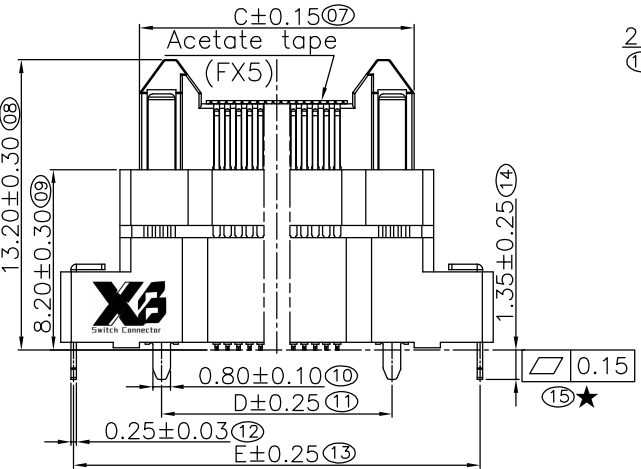
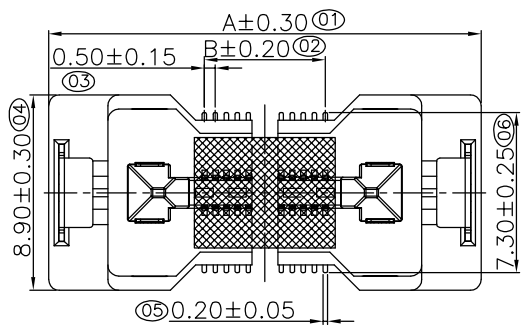


No. of contacts	Dimension Information					
	A	B	C	D	E	F
2x10	18.70	4.50	11.50	9.50	17.50	5.0
2x20	23.70	9.50	16.50	14.50	22.50	10.0
2x30	28.70	14.50	21.50	19.50	27.50	10.0
2x40	33.70	19.50	26.50	24.50	32.50	10.0
2x50	38.70	24.50	31.50	29.50	37.50	10.0
2x60	43.70	29.50	36.50	34.50	42.50	10.0

Specifications
 Current capacity:
 Signal contact:0.5A/pin. Power contact:3A/pin.
 Insulation Resistance:Signal part:100MΩ.
 Power part:1000MΩ.
 Dielectric Withstanding Voltage:Signal part:at AC 150Vfor 1 minute.
 Power part:at AC 600V for 1 minute.
 Contact Resistance:Signal part:70mΩ.
 Power part:20mΩ.
 Operating Temperature:-55°C to +105°C.
 Materials
 Contact Material:Copper alloy.
 Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP or the equivalent material
 ☆All materials must meet XI BANG hazardous substances control standards.
 "★": Critical Characteristics, indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
 "☆": Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

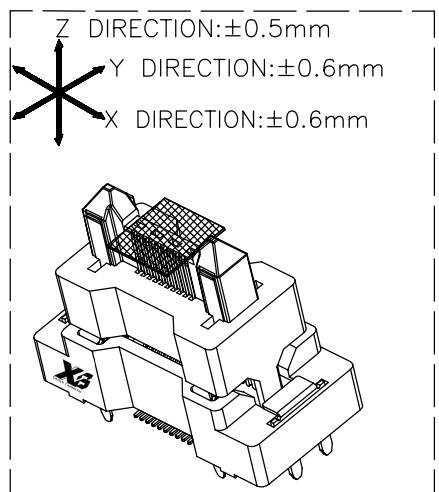

Ordering Information

XB-GGAC-203-A002

No. of Pins per Row: 10,20,30,40,50,60
 Standard Plating: 02=Gold Flash, 09=3u"AU/Gold Flash
 Insulator Material: C=LCP
 Color: 1=Black G=Multiple materials
 Contact Material: H=Acetate Tape+Tape&Reel
 Standard Packing: H=Acetate Tape+Tape&Reel

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. XB-GGAC-203-A002	TITLE. 0.5mm PITCH Male BTB FLOATING CONNECTOR Matting H=15mm
		X.*±5.0°	X.±0.30	CHECKED:	DATE:		
		.X.*±3.0°	.X±0.25	APPROVED:	DATE:		
REV. A	UNIT. mm	SCALE. 4:1	PAGE. 1/1			PART NO.	