



1 2 3 4 5 6 7 8 9

F

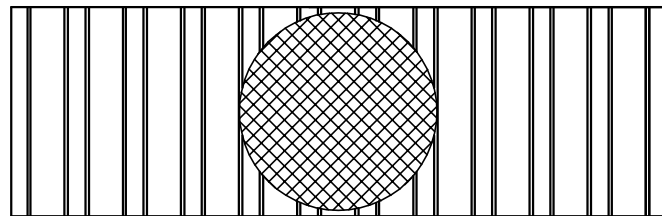


E

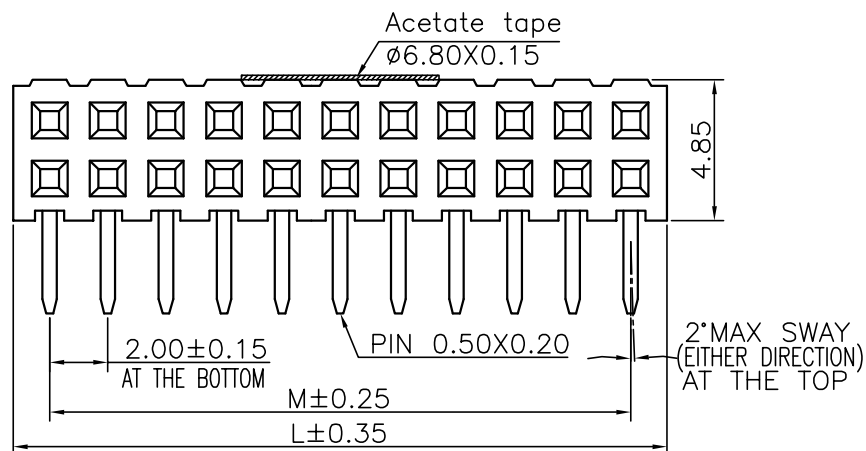

D

C

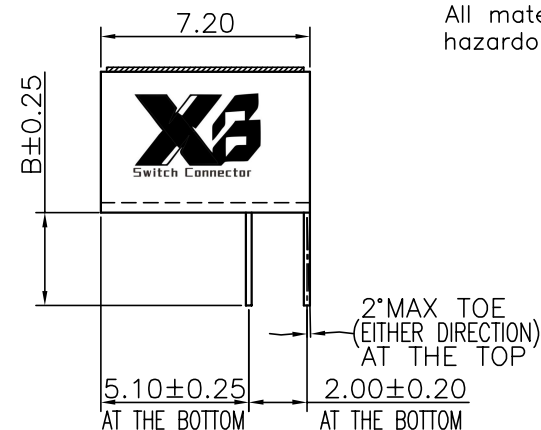

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
PBT(Not resistant to high temperature),
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet XI BANG
hazardous substances control standards.

F

E

D

C

B

A

Ordering Information

XB-PM-B-20-203

Plastic specifications

- 1=Single row
- 2=Dual row
- 3=Tripe row
- 4=Quadruple

Water code

No. of Pins per Row
02~40

Positioning column information

- A=No locating post
- B=Round post
- C=Square post

Plating code

- 01=Tin
- 02=Gold Flash
- 05=Gold Flash/Tin
- 22=Matte Tin

Pin length
See the drawing

Insulator Material

- A=PBT
- R=Nylon(Halogen Free)
- C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige


Contact Material

- A/S/K/T=Phosphor Bronze

Packing code

- A=Box
- B=Tray
- C=Tube
- D=Tape&Reel
- G=Acetate Tape+Tube
- H=Acetate Tape+Tape&Reel

Recommended P.C.Board
Layout
(Tolerance:±0.05)



No. of PIN/ROW	Dimension Information	
	M	L
02	2.00	4.50
03	4.00	6.50
04	6.00	8.50
05	8.00	10.50
06	10.00	12.50
07	12.00	14.50
08	14.00	16.50
09	16.00	18.50
10	18.00	20.50
11	20.00	22.50
12	22.00	24.50
13	24.00	26.50
14	26.00	28.50
15	28.00	30.50
16	30.00	32.50
17	32.00	34.50
18	34.00	36.50
19	36.00	38.50
20	38.00	40.50
21	40.00	42.50
22	42.00	44.50
23	44.00	46.50
24	46.00	48.50
25	48.00	50.50
26	50.00	52.50
27	52.00	54.50
28	54.00	56.50
29	56.00	58.50
30	58.00	60.50
31	60.00	62.50
32	62.00	64.50
33	64.00	66.50
34	66.00	68.50
35	68.00	70.50
36	70.00	72.50
37	72.00	74.50
38	74.00	76.50
39	76.00	78.50
40	78.00	80.50

X3 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 4:1 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DATE:	DATE:
DATE:	DATE:
DATE:	DATE:
DATE:	DATE:

DWG. NO.	XB-PM-B-20-203
PART NO.	

TITLE.	2.00 FEMALE HEADER DUAL ROW (R/A) TYPE SIDE ENTRY
--------	---