
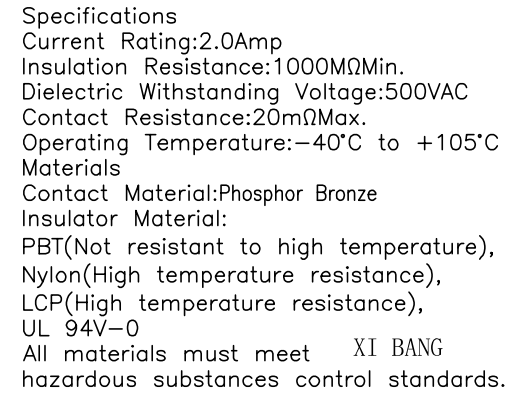


No. of PIN/ROW	Dimension	Information
	M	L
02	2.00	4.60
03	4.00	6.60
04	6.00	8.60
05	8.00	10.60
06	10.00	12.60
07	12.00	14.60
08	14.00	16.60
09	16.00	18.60
10	18.00	20.60
11	20.00	22.60
12	22.00	24.60
13	24.00	26.60
14	26.00	28.60
15	28.00	30.60
16	30.00	32.60
17	32.00	34.60
18	34.00	36.60
19	36.00	38.60
20	38.00	40.60
21	40.00	42.60
22	42.00	44.60
23	44.00	46.60
24	46.00	48.60
25	48.00	50.60
26	50.00	52.60
27	52.00	54.60
28	54.00	56.60
29	56.00	58.60
30	58.00	60.60
31	60.00	62.60
32	62.00	64.60
33	64.00	66.60
34	66.00	68.60
35	68.00	70.60
36	70.00	72.60
37	72.00	74.60
38	74.00	76.60
39	76.00	78.60
40	78.00	80.60

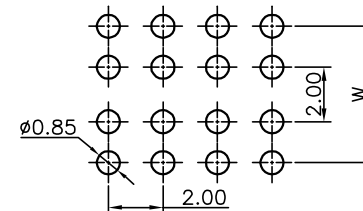

Ordering Information

Diagram illustrating the structure of a part number, showing the breakdown of digits into specifications:

- Plastic specifications**
 - 1=Single row
 - 2=Dual row
 - 3=Tripe row
 - 4=Quadruple
- Water code**
- No. of Pins per Row**
 - 02~40
- Plating code**
 - 01=Tin
 - 02=Gold Flash
 - 05=Gold Flash/Tin
 - 22=Matte Tin
- Positioning column information**
 - A=No locating post
 - B=Round post
 - C=Square post
- Pin length**
 - See the drawing
- Insulator Material**
 - A=PBT
 - R=Nylon(Halogen Free)
 - C=LCP
- Color**
 - 1=Black
 - 2=White
 - 3=Yellow
 - E=Beige
- Contact Material**
 - A/S/K/T=Phosphor Bronze
- Packing code**
 - A=Box
 - B=Tray
 - C=Tube
 - D=Tape&Reel

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				GENERAL TOLERANCE X.±5.0° X.±0.30 .X'±3.0° .X±0.25 .XX'±2.0° .XX±0.15 .XXX'±1.0° .XXX±0.10		DESIGNED: CHECKED: CO SIGNED: APPROVED:		DATE: DATE: DATE: DATE:		DWG. NO. XB-PM-F-20-201 PART NO. XB-PM-F-20-201		TITLE. 2.00 FEMALE HEADER DUAL ROWS DIP TYPE CONNECTOR	
REV.	01	UNIT. mm	SCALE. 5:1	PAGE. 1/1									