


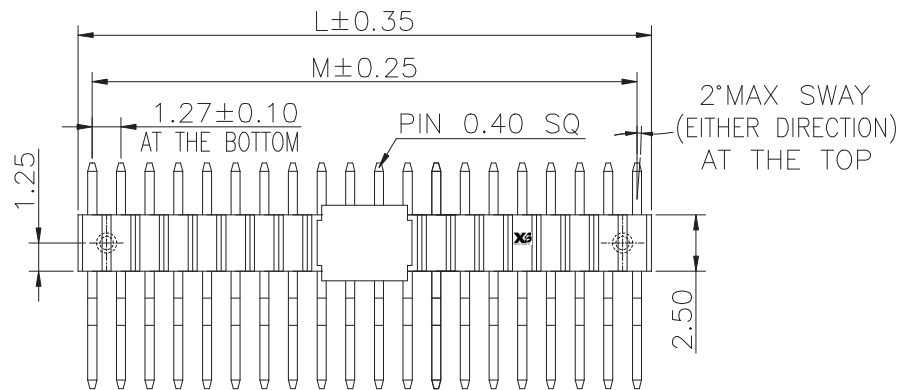


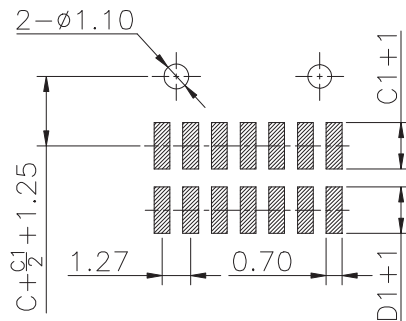


Recommended P.C.Board
Layout
(Tolerance:±0.05)

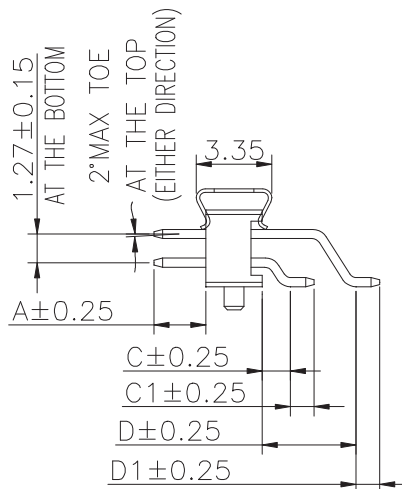

Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Brass
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 LCP
or the equivalent material
All materials must meet XI BANG
hazardous substances control standards.

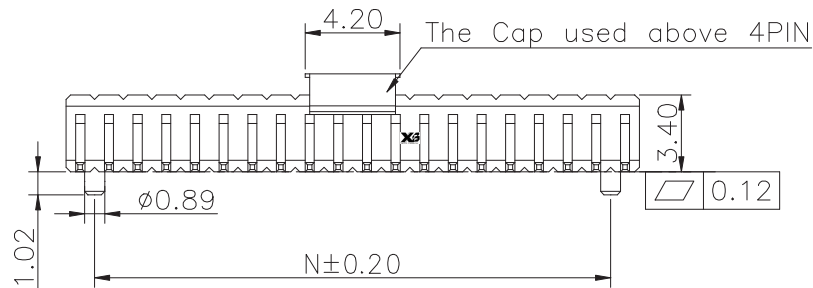

Acetate tape
(ø5.00x0.15)



No. of PIN/ROW	Dimension Information		
	L	M	N
03	3.81	2.54	1.27
04	5.08	3.81	2.54
05	6.35	5.08	3.81
06	7.62	6.35	5.08
07	8.89	7.62	6.35
08	10.16	8.89	7.62
09	11.43	10.16	8.89
10	12.70	11.43	10.16
11	13.97	12.70	11.43
12	15.24	13.97	12.70
13	16.51	15.24	13.97
14	17.78	16.51	15.24
15	19.05	17.78	16.51
16	20.32	19.05	17.78
17	21.59	20.32	19.05
18	22.86	21.59	20.32
19	24.13	22.86	21.59
20	25.40	24.13	22.86
21	26.67	25.40	24.13
22	27.94	26.67	25.40
23	29.21	27.94	26.67
24	30.48	29.21	27.94
25	31.75	30.48	29.21
26	33.02	31.75	30.48
27	34.29	33.02	31.75
28	35.56	34.29	33.02
29	36.83	35.56	34.29
30	38.10	36.83	35.56
31	39.37	38.10	36.83
32	40.64	39.37	38.10
33	41.91	40.64	39.37

Ordering Information

201		-	XX	XX	B	XXX	C	1	Z	X
Plastic specifications		Water code		Positioning column information		Pin length		Color		Packing code
1=Single row		No. of Pins per	Row	A=No locating post		See the drawing		1=Black		A=Box
2=Dual row		03~33		B=Round post				2=White		B=Tray
3=Tripe row				C=Square post				3=Yellow		C=Tube
4=Quadruple								E=Beige		D=Tape&Reel
				Plating code		Insulator Material	Contact Material			E=Cap+Tube
				01=Tin		R=Nylon(Halogen Free)	A/S/K/T=Phosphor Bronze			F=Cap+Tape&Reel
				02=Gold Flash		C=LCP	B/Z/H/W=Brass			G=Acetate Tape+Tube
				05=Gold Flash/Tin						H=Acetate Tape+Tape&Reel
				22=Matte Tin						

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV. 01 UNIT. mm SCALE. 3:1 PAGE. 1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DWG. NO.

XB-PZ-B-127-108

PART NO.

TITLE.

1.27 MALE HEADER
DUAL ROWS SMT TYPE
SIDE ENTRY