
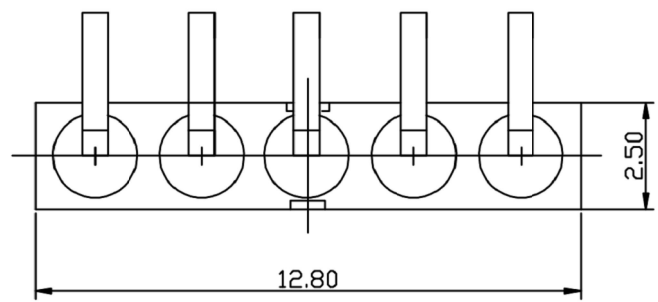
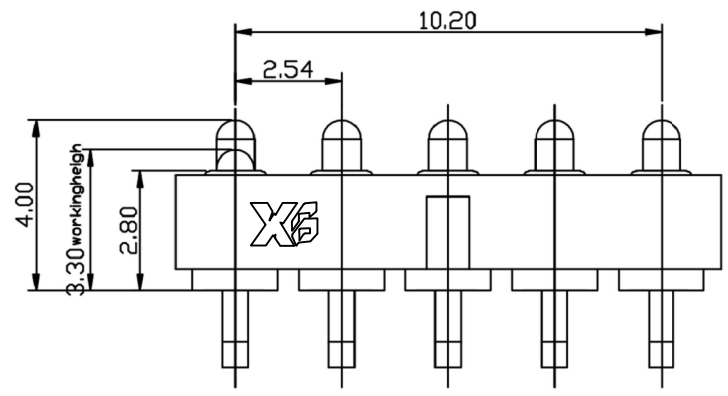


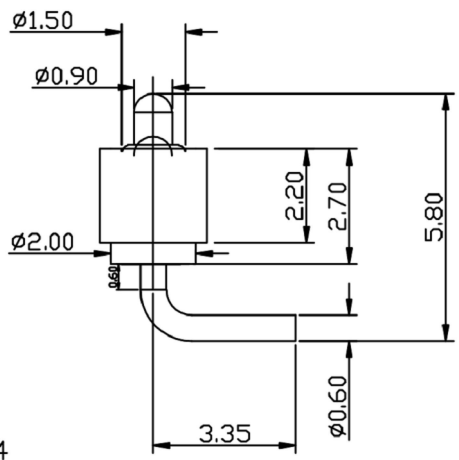

NOTE

- 1.Material
Plunger: Brass 3604
Barrel: Brass 3604
Spring: SUS304
Housing:PA46
- 2.Plating
Plunger: Au 3u" over 70~140u" Ni
Barrel: Au 3u" over 70~140u" Ni
Spring: Au 1u" over 70~140u" Ni
- 3.Electrical
Rated current & voltage: DC 12V; 2.0A Max.
- 4.Mechanical
Spring force: **50g±20%** at normal working height
Durability: 10,000 cycles(minimum)
- 5.To ensure the best usage,please operateit based on the working height
Based on the engineering drawings,shall not exceed the maximum allowed
compression
- 6.To avoid arcing issue, The adaptor startto power supply
after connector mated fully.
- 7.RoHS compliant product.

REV. A	Product Name: 5PIN 公座连接器	GENERAL TOLERANCE		SCALE: 15:1	制图 高鹏	DATE 2024-06-13	DRAWING NO: XB-PGC-W-254D-5P-G
SHEET 1/1		XX. ±0.40		UNIT: mm	批准 贺龙飞	DATE	
		X. ±0.25		SIZE: A4	审核 庞东	DATE	Material number:
		.X ±0.10	.X° ±1.0°				
		.XX ±0.05	.XX° ±0.5°				

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.