



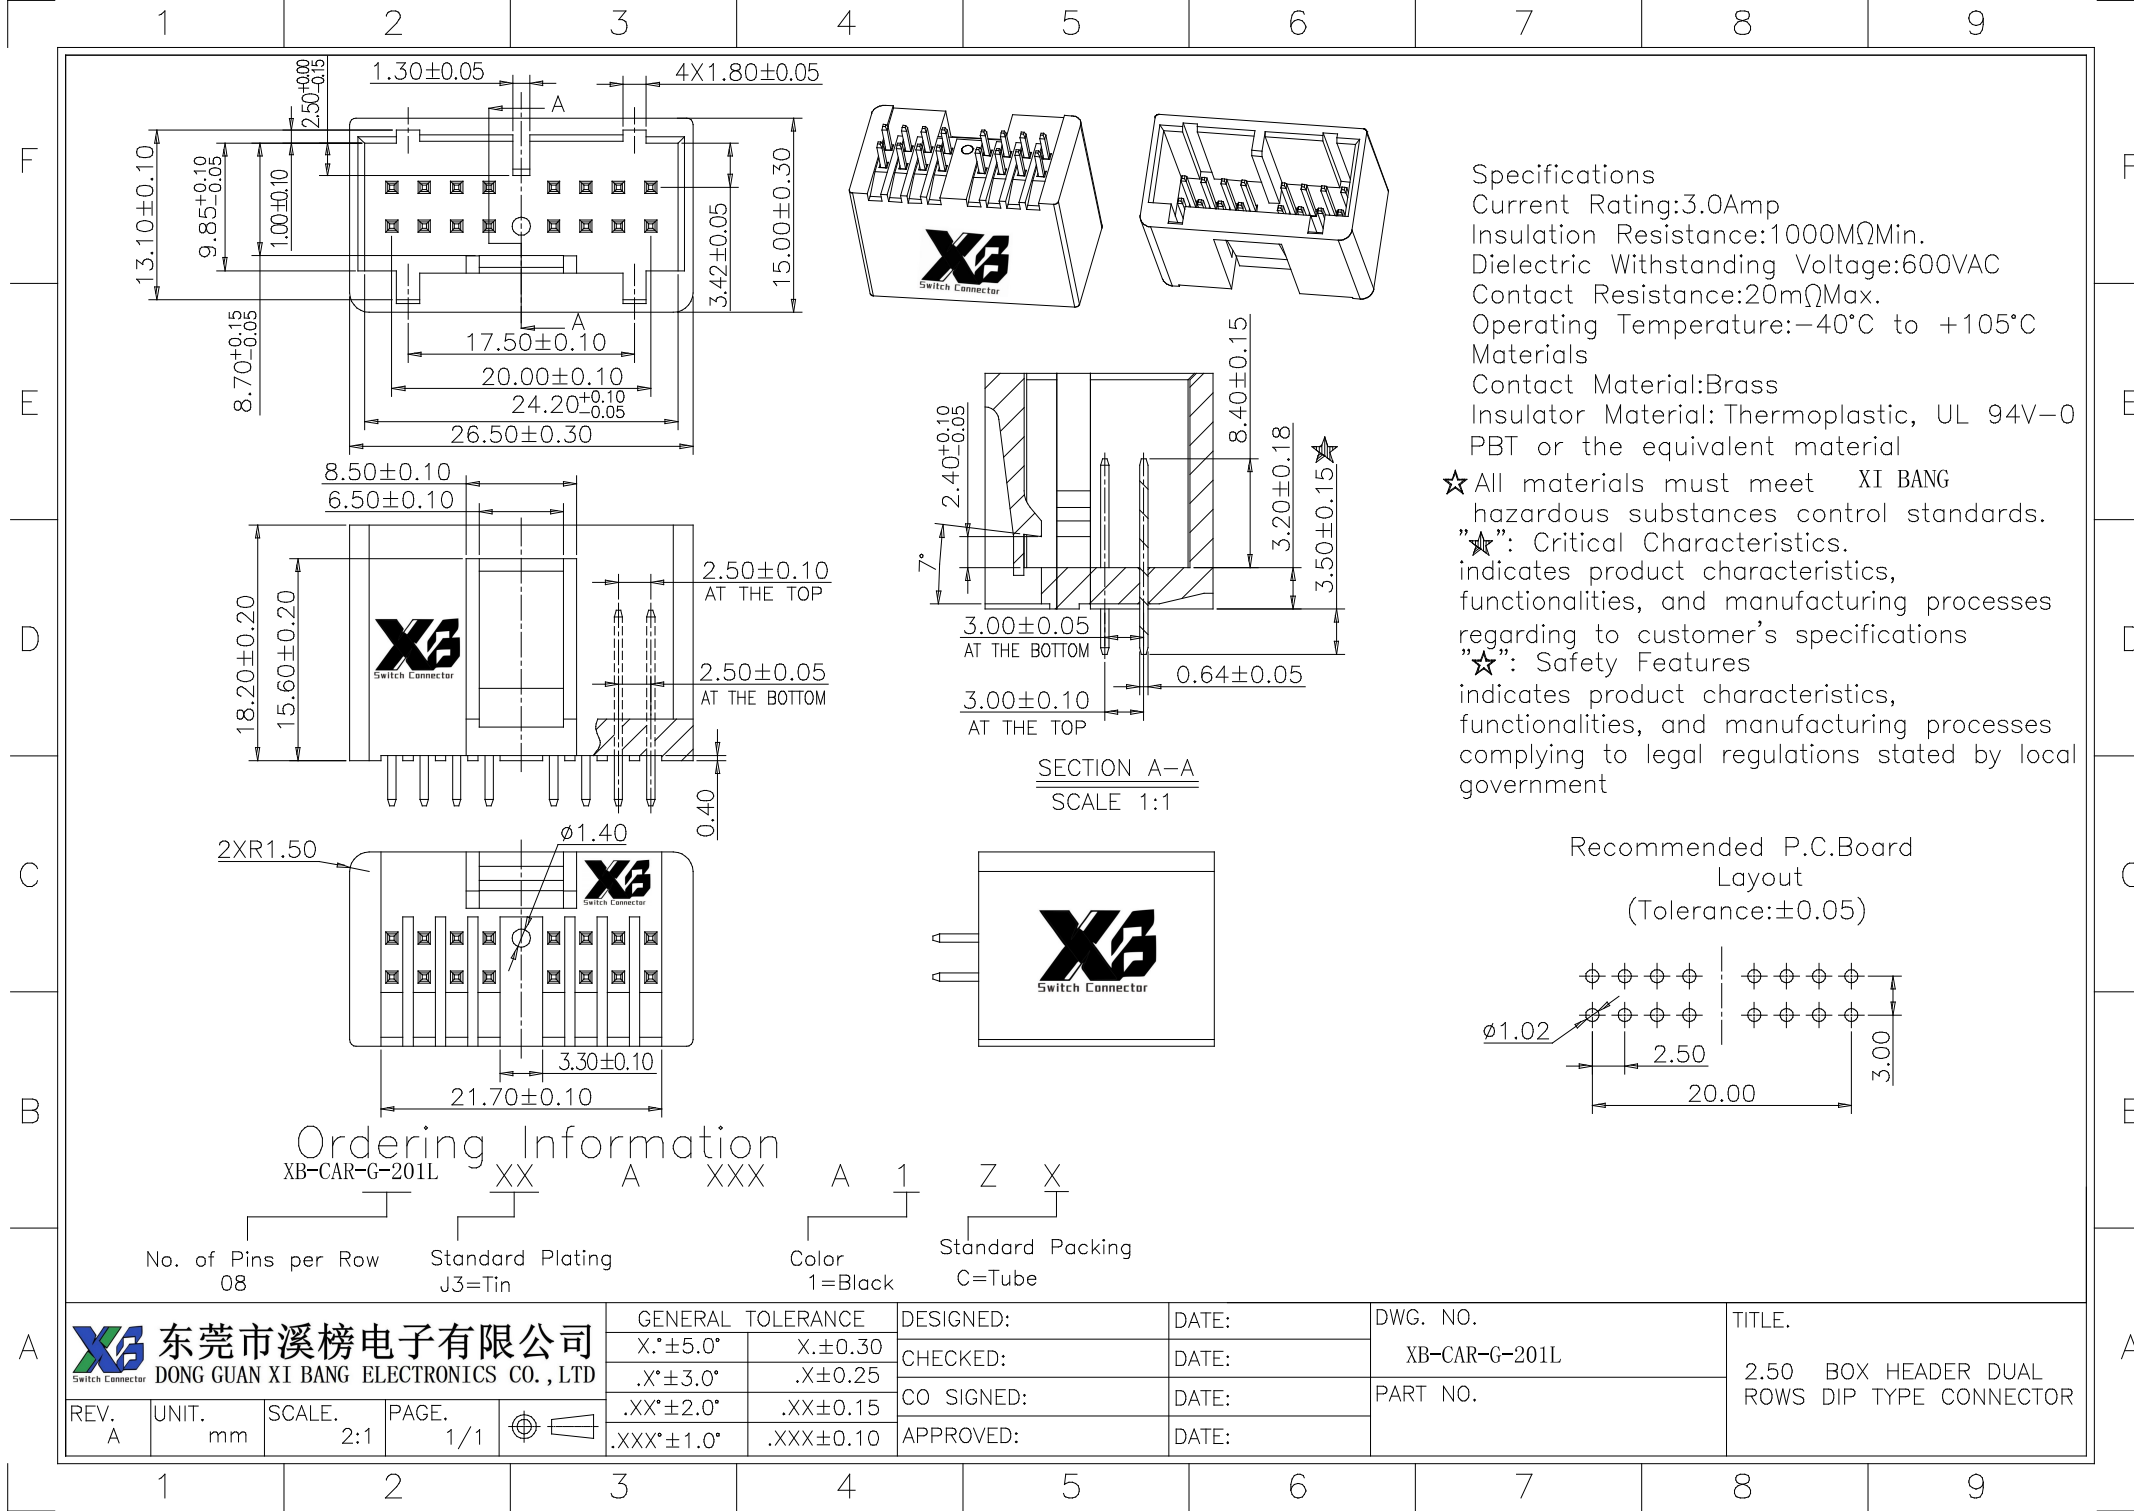

Specifications
Current Rating:3.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Brass
Insulator Material: Thermoplastic, UL 94V-0
PBT or the equivalent material

☆ All materials must meet XI BANG hazardous substances control standards.
"☆": Critical Characteristics, indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications
"☆": Safety Features indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

Recommended P.C.Board Layout
(Tolerance:±0.05)

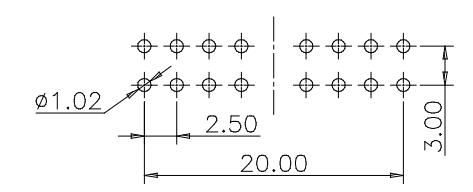

Ordering Information

XB-CAR-G-201L XX A XXX A 1 Z X

No. of Pins per Row 08
Standard Plating J3=Tin
Color 1=Black
Standard Packing C=Tube

 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD					GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. XB-CAR-G-201L	TITLE. 2.50 BOX HEADER DUAL ROWS DIP TYPE CONNECTOR
					X.°±5.0°	X.±0.30	CHECKED:	DATE:		
UNIT. mm		SCALE. 2:1	PAGE. 1/1		.X°±3.0°	.X±0.25	CO SIGNED:	DATE:	PART NO.	
REV. A					.XX°±2.0°	.XX±0.15	APPROVED:	DATE:		
					.XXX°±1.0°	.XXX±0.10				