

1 2 3 4 5 6 7 8 9

F

F

E

E

D

D

C




C

B

B

A

A

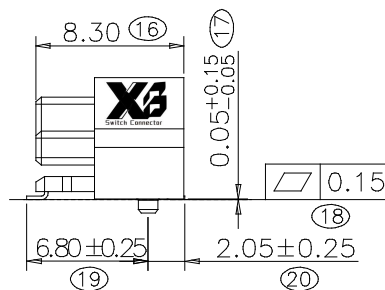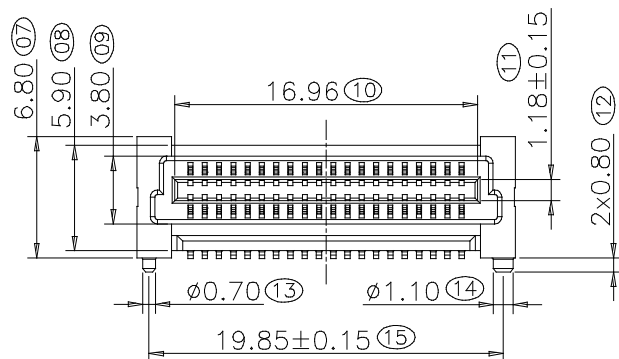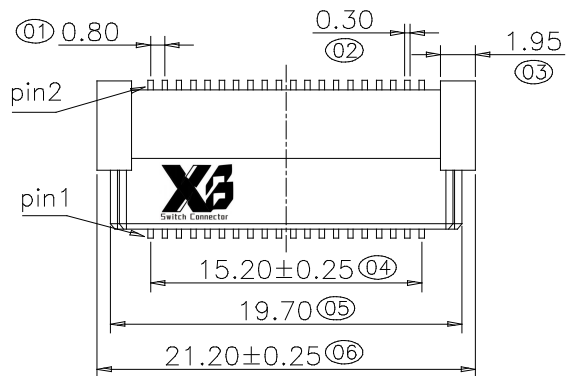

Specifications

Current Rating:0.5Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:500VAC

Contact Resistance:30mΩMax.

Operating Temperature:-40°C to +105°C

Materials


Contact Material:Phosphor copper

Insulator Material:High Temperature

Thermoplastic, UL 94V-0 LCP or the equivalent material

All materials must meet XI BANG hazardous substances control standards.

Recommended P.C.Board Layout (Tolerance:±0.05)

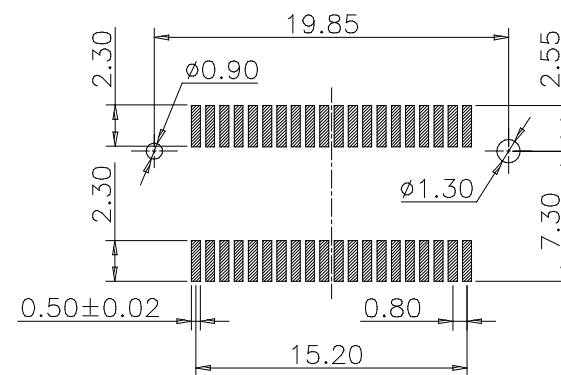

Ordering Information

XB-CAR-G-C201-C-SMD XX B 001

No. of Pins per Row
20

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
70=Gold Flash/Ni

Color
5=NATURAL

Standard Packing
D=Tape Reel
Selective Packing
G=acetate tape+Tube
H=acetate tape+Tape&Reel

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. A UNIT. mm SCALE. 2:5 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.50
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.
XB-CAR-G-C201-C-SMD
PART NO.

TITLE.
0.8 mm PITCH BTB RCPT
DUAL ROWS SMT TYPE WITH
POST CONNECTOR

1 2 3 4 5 6 7 8 9