

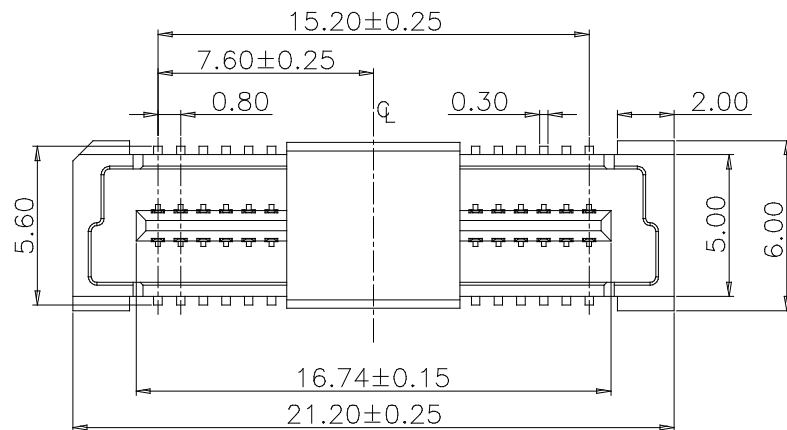
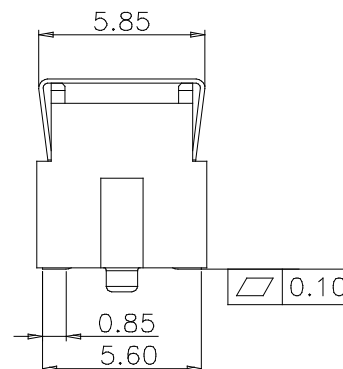


Specifications
 Current Rating:0.5Amp
 Insulation Resistance:1000MΩMin.
 Dielectric Withstanding Voltage:500VAC
 Contact Resistance:30mΩMax.
 Operating Temperature:-40°C to +105°C
 Materials
 Contact Material:Brass
 Insulator Material:High Temperature
 Thermoplastic, UL 94V-0 LCP
 or the equivalent material
 All materials must meet XI BANG
 hazardous substances control standards.

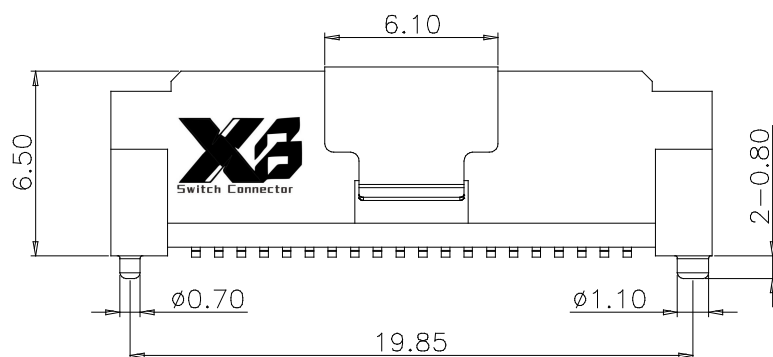

Recommended P.C.Board
 Layout
 (Tolerance:±0.05)

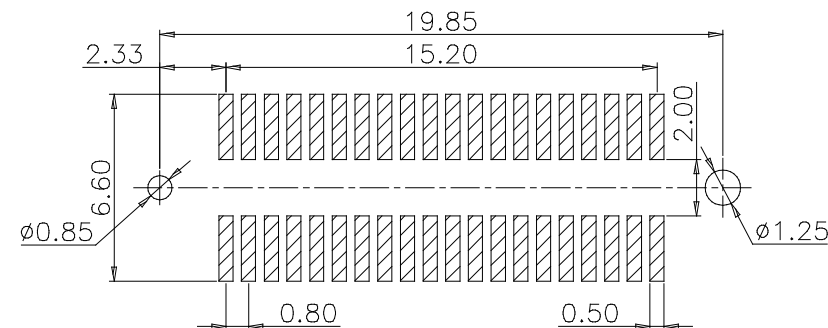

Ordering Information

XB-CAR-G-L252-SMD XX B 001 C 5 W X

No. of Pins per Row
20

Standard Plating
05=Gold Flash/Tin
Selective Plating
02=Gold Flash

Color
5=Natural

Standard Packing
F=Cap+Tape&Reel
Selective Packing
C=Tube

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. 01 UNIT. mm SCALE. 4:1 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.50
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.	XB-CAR-G-L252-SMD
PART NO.	

TITLE.	PITCH 0.80 MALE B To B SMT TYPE CONNECTOR
--------	---