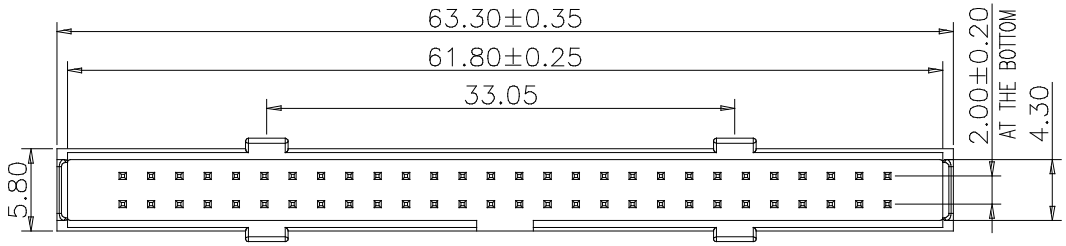

Specifications
Current Rating:2Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:−40°C to +105°C
Materials
Contact Material:Brass
Insulator Material:High Temperature Thermoplastic, UL 94V−0 LCP E130i or the equivalent material
All materials must meet XI BANG hazardous substances control standards.

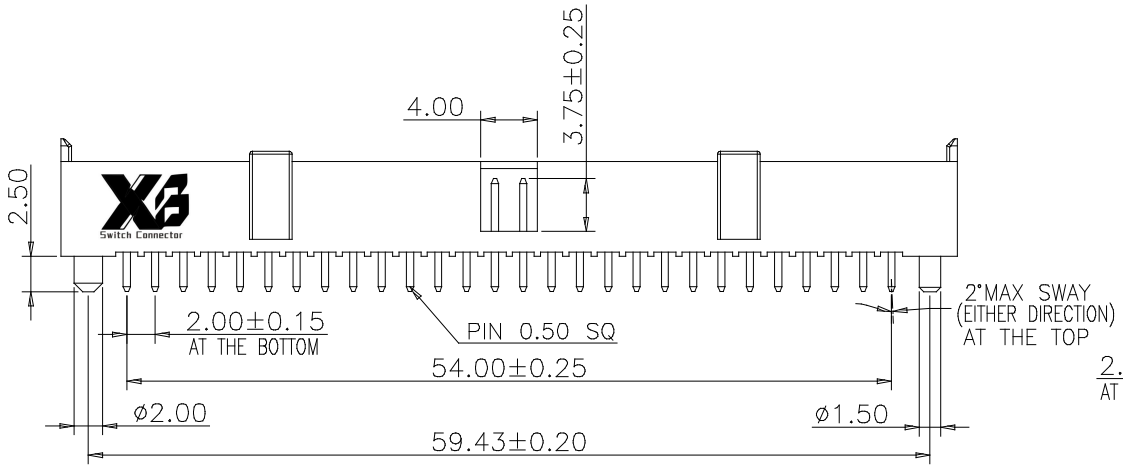

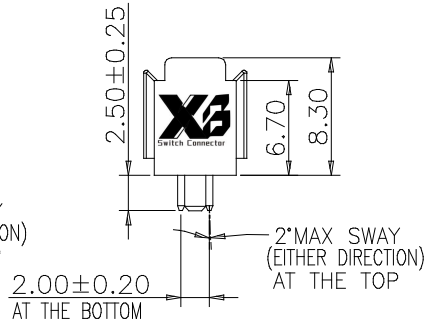

Ordering Information

XB-CAR-G-W267-C XX B 001 C 1 Z X

- XB-CAR-G-W267-C: No. of Pins per Row 28
- XX: Standard Plating 02=Gold Flash; Selective Plating 01=Tin, 38=10u" Gold/MATTE Tin
- B:
- 001:
- C:
- 1: Color 1=Black
- Z:
- X: Standard Packing C=Tube; Selective Packing B=Tray, D=Tape&Reel

Recommended P.C.Board Layout (Tolerance:±0.05)

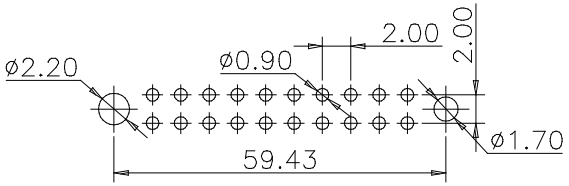

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD	3RD.ANG PROJ.	GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO. XB-CAR-G-W267-C	TITLE. 2.00 PIN HEADER DUAL ROWS DIP 180° TYPE BASE 6.70H
		X.°±5.0°	X.±0.30	CHECKED:	DATE:	PART NO.	
		.X°±3.0°	.X±0.25				
		.XX°±2.0°	.XX±0.15	APPROVED:	DATE:		
		.XXX°±1.0°	.XXX±0.10				
REV. 01	UNIT. mm	SCALE. 2:1	PAGE. 1/1				