
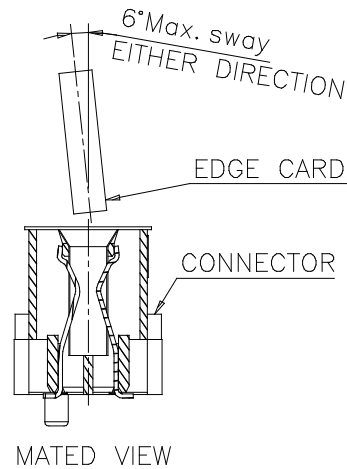


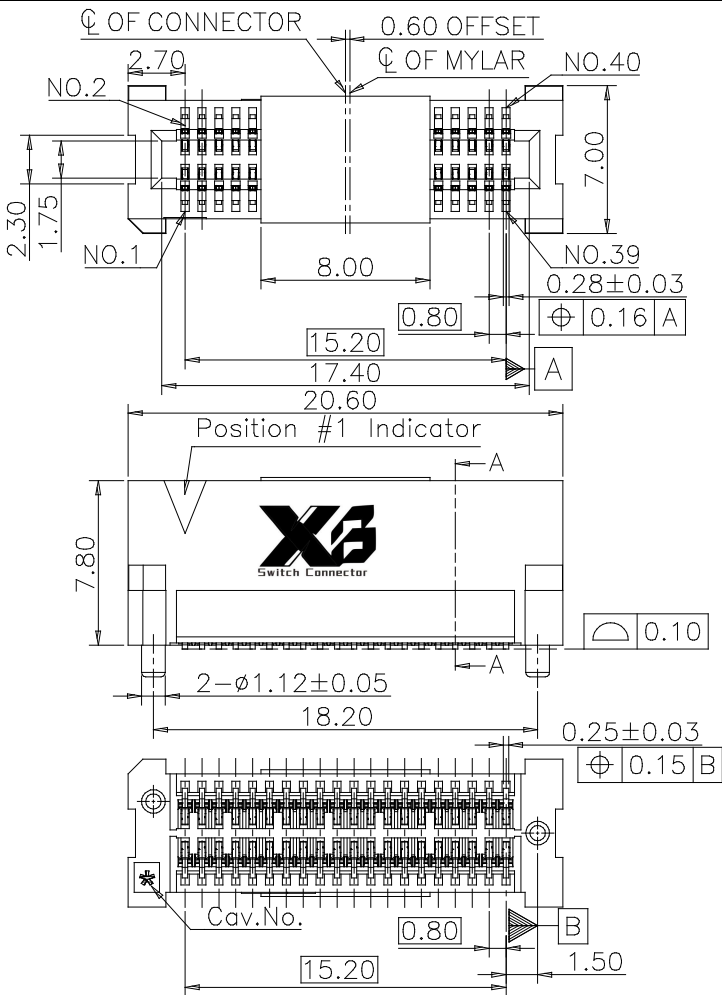


Specifications:
 Current Rating:1.5Amp
 Voltage Rating : 250V AC.
 Insulation Resistance:6000MΩMin.
 Dielectric Withstanding Voltage:600V AC
 Contact Resistance:15mΩMax.
 Operating Temperature:-55°C to +125°C

Materials:
 Contact Material:Copper alloy
 Insulator Material:High Temperature Thermoplastic, UL94V-0, Color: Black

All materials must meet BHDW hazardous substances control standards.

Ordering Information

XX XX B XX1 C 1 6 X
 No. of Pins per Row 20
 Standard Plating 78=Gold/Matte Tin
 02=Gold Flash
 Color 1=Black
 Standard Packing H=Acetate Tape+Tape&Reel
 D=Tape&Reel

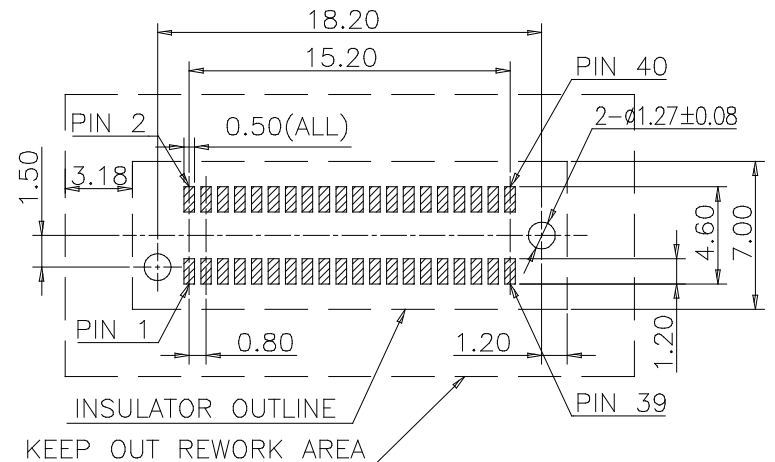

RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.05

X3 东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. 03 UNIT. mm SCALE. 3:1 PAGE. 1/2

GENERAL TOLERANCE	
X.*±3.0°	X.±0.30
.X.*±2.0°	.X.±0.25
.XX.*±1.0°	.XX±0.20
.XXX.*±0.5°	.XXX±0.15

DESIGN:	DATE:
CHECKED:	DATE:
CO SIGNED:	DATE:
APPROVED:	DATE:

DWG. NO.
XB-CAR-M-203-SMD
 PART NO.

TITLE.
 PITCH 0.80MM HIGH
 SPEED EDGE CARD
 CONNECTOR

1 2 3 4 5 6 7 8 9

F



E

D



C

B

A

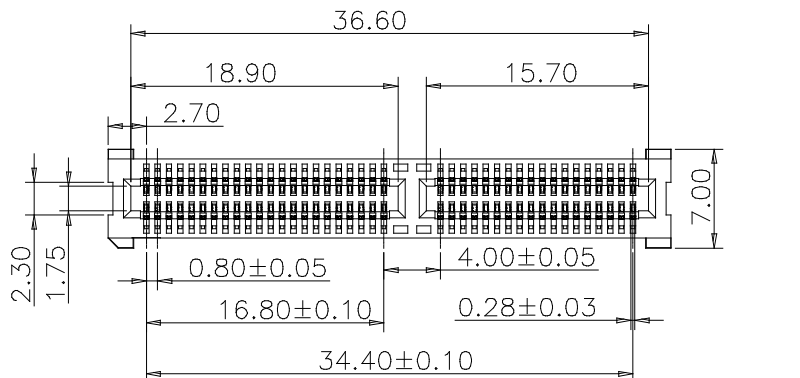


SECTION A-A

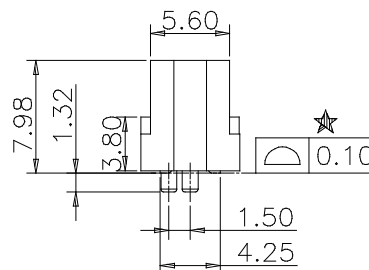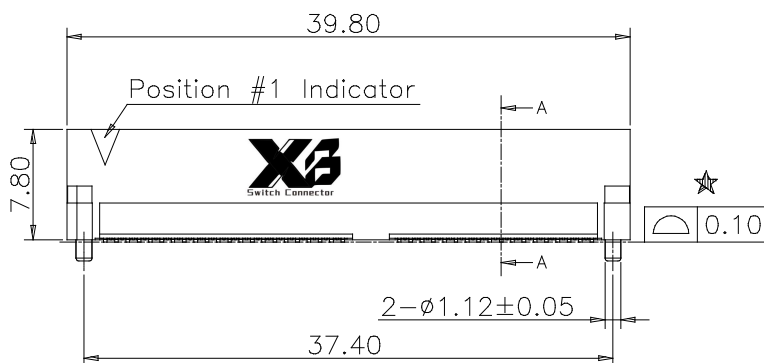

Specifications:
Current Rating:1.5Amp
Voltage Rating : 250V AC.
Insulation Resistance:6000MΩMin.
Dielectric Withstanding Voltage:600V AC
Contact Resistance:15mΩMax.
Operating Temperature:-55°C to +125°C


Materials:
Contact Material:Copper alloy
Insulator Material:High Temperature
Thermoplastic, UL94V-0, Color: Black
All materials must meet BHDW hazardous
substances control standards.

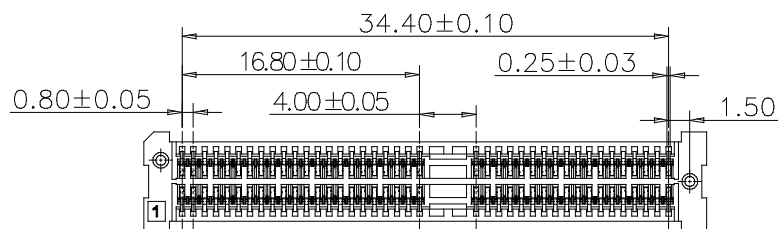

Ordering Information

XX XX B XX2 C 1 6 X
No. of Pins per Row 40
Standard Plating 78=Gold/Matte Tin 02=Gold Flash
Color 1=Black
Standard Packing F=CAP+Tape&Reel H=Acetate Tape+Tape&Reel

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

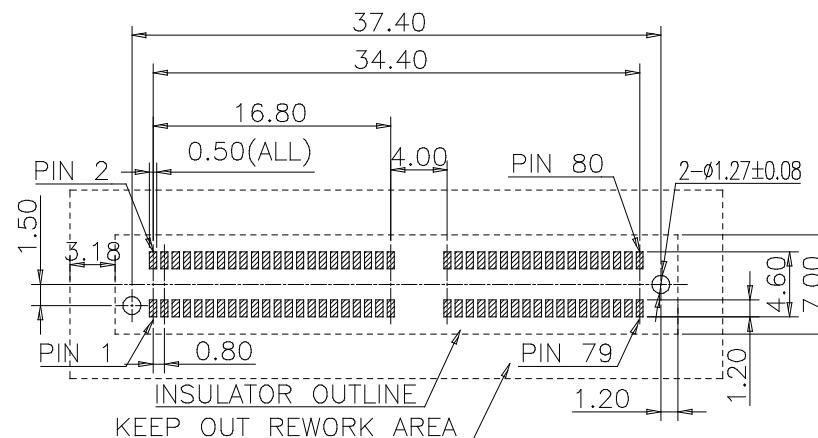

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. 01 UNIT. mm SCALE. 2:1 PAGE. 2/3

GENERAL TOLERANCE	
X.*±3.0°	X.±0.30
.X.*±2.0°	.X.±0.25
.XX.*±1.0°	.XX.±0.20
.XXX.*±0.5°	.XXX.±0.15




DESIGN:
CHECKED:
CO SIGNED:
APPROVED:

DATE:
DATE:
DATE:
DATE:

DWG. NO.
XB-CAR-M-203-SMD
PART NO.

TITLE.
PITCH 0.80MM HIGH
SPEED EDGE CARD
CONNECTOR

1 2 3 4 5 6 7 8 9

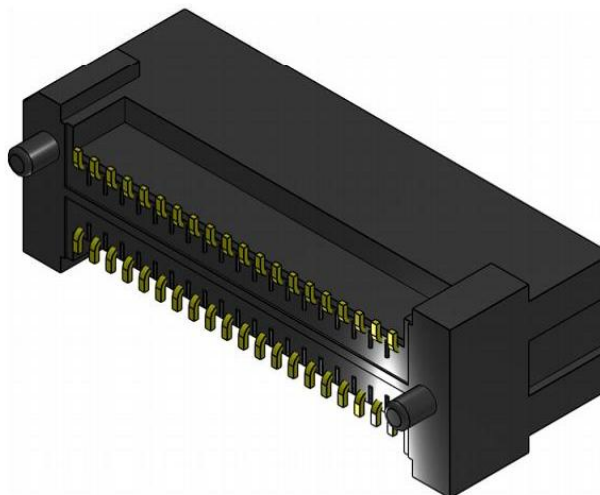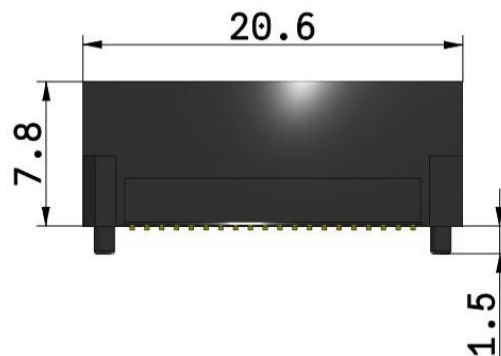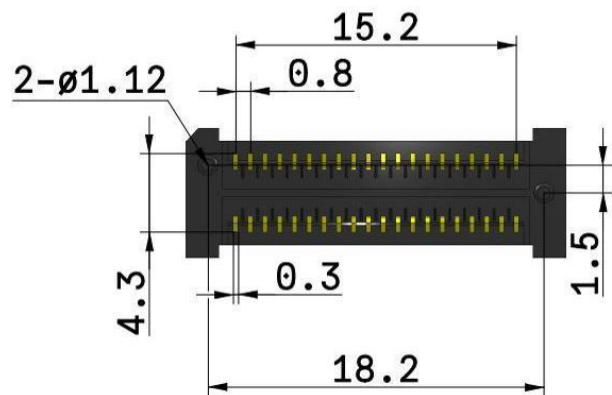

Specifications
Current Rating:3Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:30mΩMax.
Operating Temperature:-40°C to +105°C
All materials must meet **XI BANG**
hazardous substances control standards.
"★": Critical Characteristics.

N°	描述	数量
1	203-2002BXX1C16D	1
1.1	203-20dy	1
1.2	203-2020.6HSG	1
1.3	203-terminal	40

CNSTYPECODE (訂購代碼)	203-2002BXX1C16D
PIN (PIN數)	20
PLATING (电镀信息)	02: 金
MATERIAL1 (絕緣材質)	C=LCP (耐高溫)
MATERIAL2 (接觸材料)	6=高導銅
PACK (包裝)	D=卷裝

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. 02 UNIT. mm SCALE. 1:1 PAGE. 1/2

GENERAL TOLERANCE	
X.*±5.0°	
.X.*±3.0°	
.XX.*±2.0°	
.XXX.*±1.0°	

DESIGN:
CHECKED:
CO SIGNED:
APPROVED:

DATE:
DATE:
DATE:
DATE:

DWG. NO.
XB-CAR-M-203-SMD
PART NO.

TITLE.
Connector,MAS
Pitch 2.54 Male Header