





ROHS

REV.	ECN. NO.	APPD.

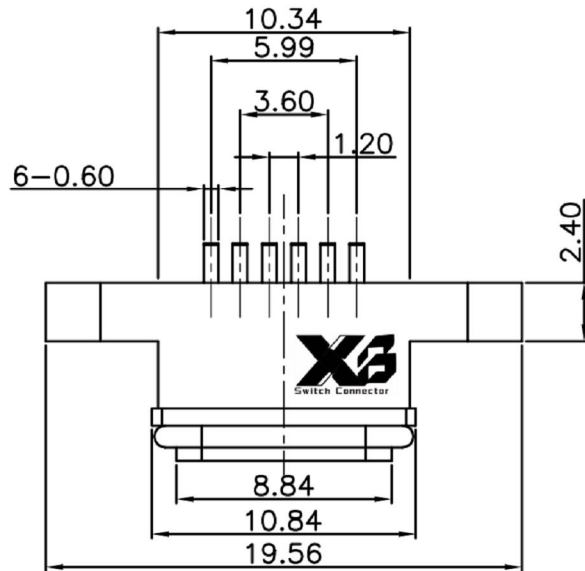

RECOMMENDED PCB LAYOUT(TOP VIEW)



THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

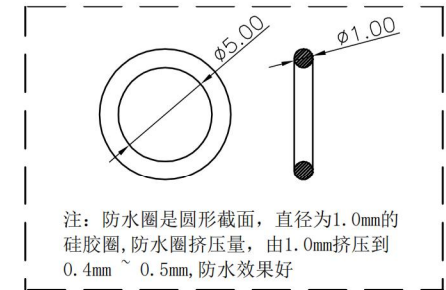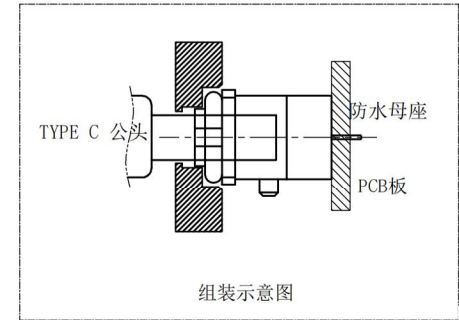

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

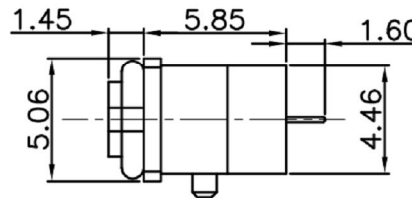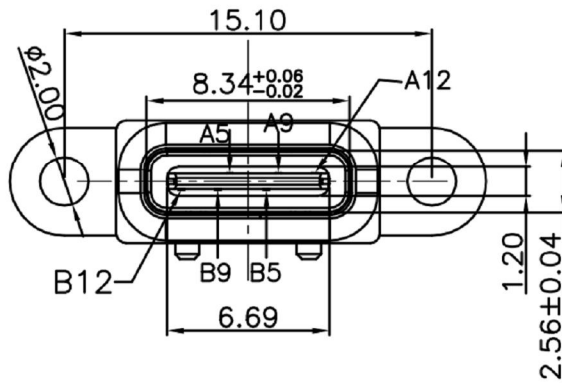

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40~120u";
3	Housing2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

X. ±0.50	X. ° ±2°	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
.X ±0.30	.X° ±1°	mm				
.XX ±0.10	.XX° ±0.5°	MAT' L	PART NO.	TITLE:		
.XXX ±0.05			XB-USB-C-6P-1108A-IPX7	TYPE C 6Pin 公头 立式		
FINISH			APPD:	GAO. PENG	DWG NO. : XB-USB-C-6P-1108A-IPX7	
			CHKD:	HE. LONG. FEI		
Q' TY			DR:	PANG. DONG	