



ROHS







REV.	ECN. NO.	APPD.

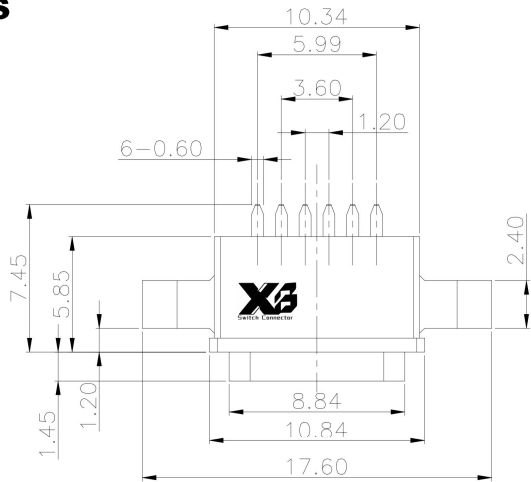

Recommended P.C.B. Layout
Unspecified tolerance: ± 0.05
(Top view)

RECOMMENDED PCB LAYOUT(TOP VIEW)

THICKNESS T=1.0mm
DEFAULT TOLERANCE+/-0.05

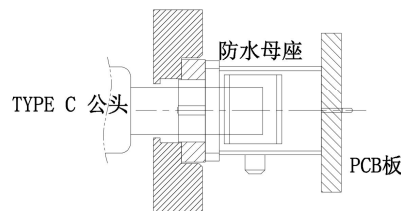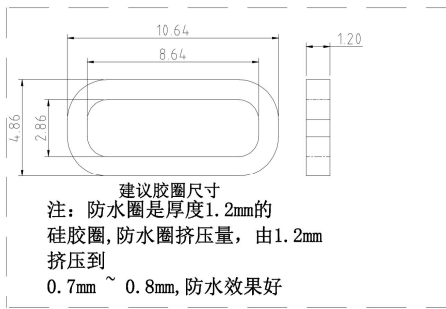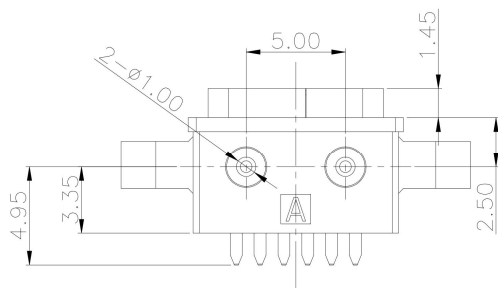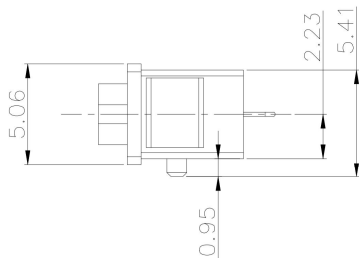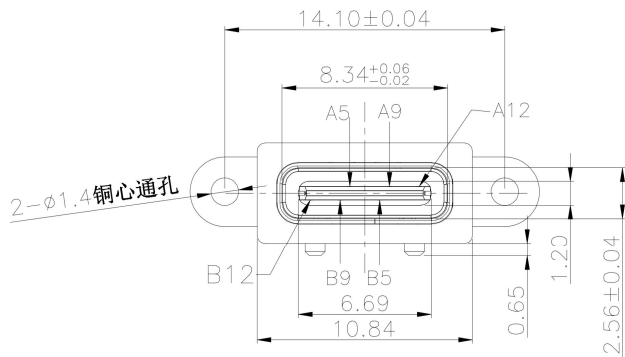

组装示意图

NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:5000 CYCLES

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

5	Screw	1	C3604 Ni Plating	Ni:40~120u";
4	Shell1	1	SUS304 Ni Plating T=0.25mm	Ni:40~120u";
3	M-D2	1	LCP(G.F30%)	
2	Contact	5	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40~160u"; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA9T (G.F30%)	
ITEM	PART NAME	Q' TY	FINISH	NOTE

X.	± 0.50	X.°	$\pm 2^{\circ}$	UNITS	mm
.X	± 0.30	.X°	$\pm 1^{\circ}$		
.XX	± 0.10	.XX°	$\pm 0.5^{\circ}$	MAT*L	
.XXX	± 0.05				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XI BANG ELECTRONIC TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XI BANG ELECTRONIC TECHNOLOGY CO., LTD					FINISH
					Q' TY



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

PART NO.
XB-USB-C-6P-1120A-6PIN-IPX7

TITLE:
TYPE C 6Pin立式插件 带耳朵φ1.4铜芯通孔

APPD: GAO. PENG

DWG NO. :
XB-USB-C-6P-1120A-6PIN-IPX7

CHKD: HE. LONG. FEI

DR: PANG. DONG



SCALE SHEET REV.
1/1 1/2 A1