

F

E

D

C

B

A

F


E

D

C

B

A

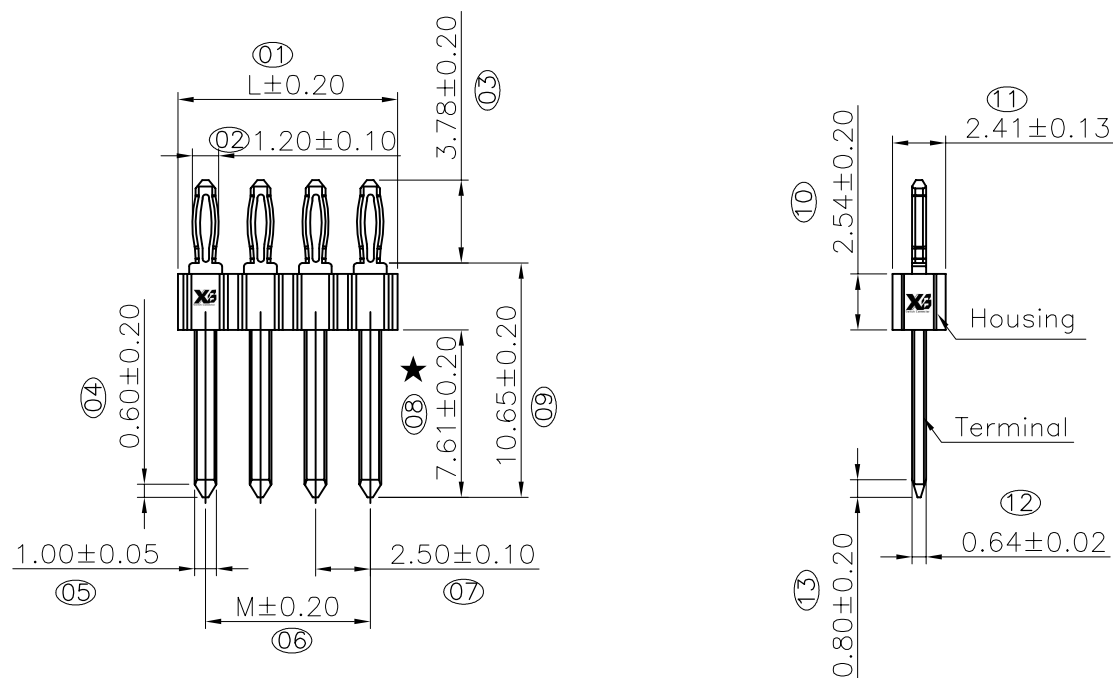

Specifications

Current Rating:3.0Amp

Insulation Resistance:1000MΩMin.

Dielectric Withstanding Voltage:600VAC

Contact Resistance:20mΩMax.

Operating Temperature:-40°C to +105°C

Materials

Contact Material:Phosphor Bronze

Insulator Material:Thermoplastic, UL 94V-0

PBT or the equivalent material

☆ All materials must meet **XI BANG** hazardous substances control standards.


”★”: Critical Characteristics.

indicates product characteristics, functionalities, and manufacturing processes regarding to customer's specifications

”☆”: Safety Features

indicates product characteristics, functionalities, and manufacturing processes complying to legal regulations stated by local government

3D View



No. of PIN/ROW	Dimension Information	
	M	L
02	2.50	5.00
03	5.00	7.50
04	7.50	10.00
05	10.00	12.50
06	12.50	15.00
07	15.00	17.50
08	17.50	20.00
09	20.00	22.50
10	22.50	25.00
11	25.00	27.50
12	27.50	30.00
13	30.00	32.50
14	32.50	35.00
15	35.00	37.50
16	37.50	40.00
17	40.00	42.50
18	42.50	45.00
19	45.00	47.50
20	47.50	50.00
21	50.00	52.50
22	52.50	55.00
23	55.00	57.50
24	57.50	60.00
25	60.00	62.50
26	62.50	65.00
27	65.00	67.50
28	67.50	70.00
29	70.00	72.50
30	72.50	75.00

Ordering Information

XB-YYDJ-108 - XX XX A 001 K 2 N X

No. of Pins per Row
02~30

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

Insulator Material
K=PBT(Halogen Free)
R=Nylon(Halogen Free)
C=LCP

Color
1=Black
2=White

Contact Material
N=Phosphor Bronze
J=Brass

Packing code
A=Box
C=Tube
D=Tape&Reel

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

3RD.ANG
PROJ.
PAGE.
1/1

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:

DATE:

DWG. NO.

XB-YYDJ-108

TITLE.

2.50 PIN HEADER
SINGLE ROW DIP TYPE
CONNECTOR

CHECKED:

DATE:

PART NO.

APPROVED:

DATE:

REV. A UNIT. mm SCALE. 3:1