



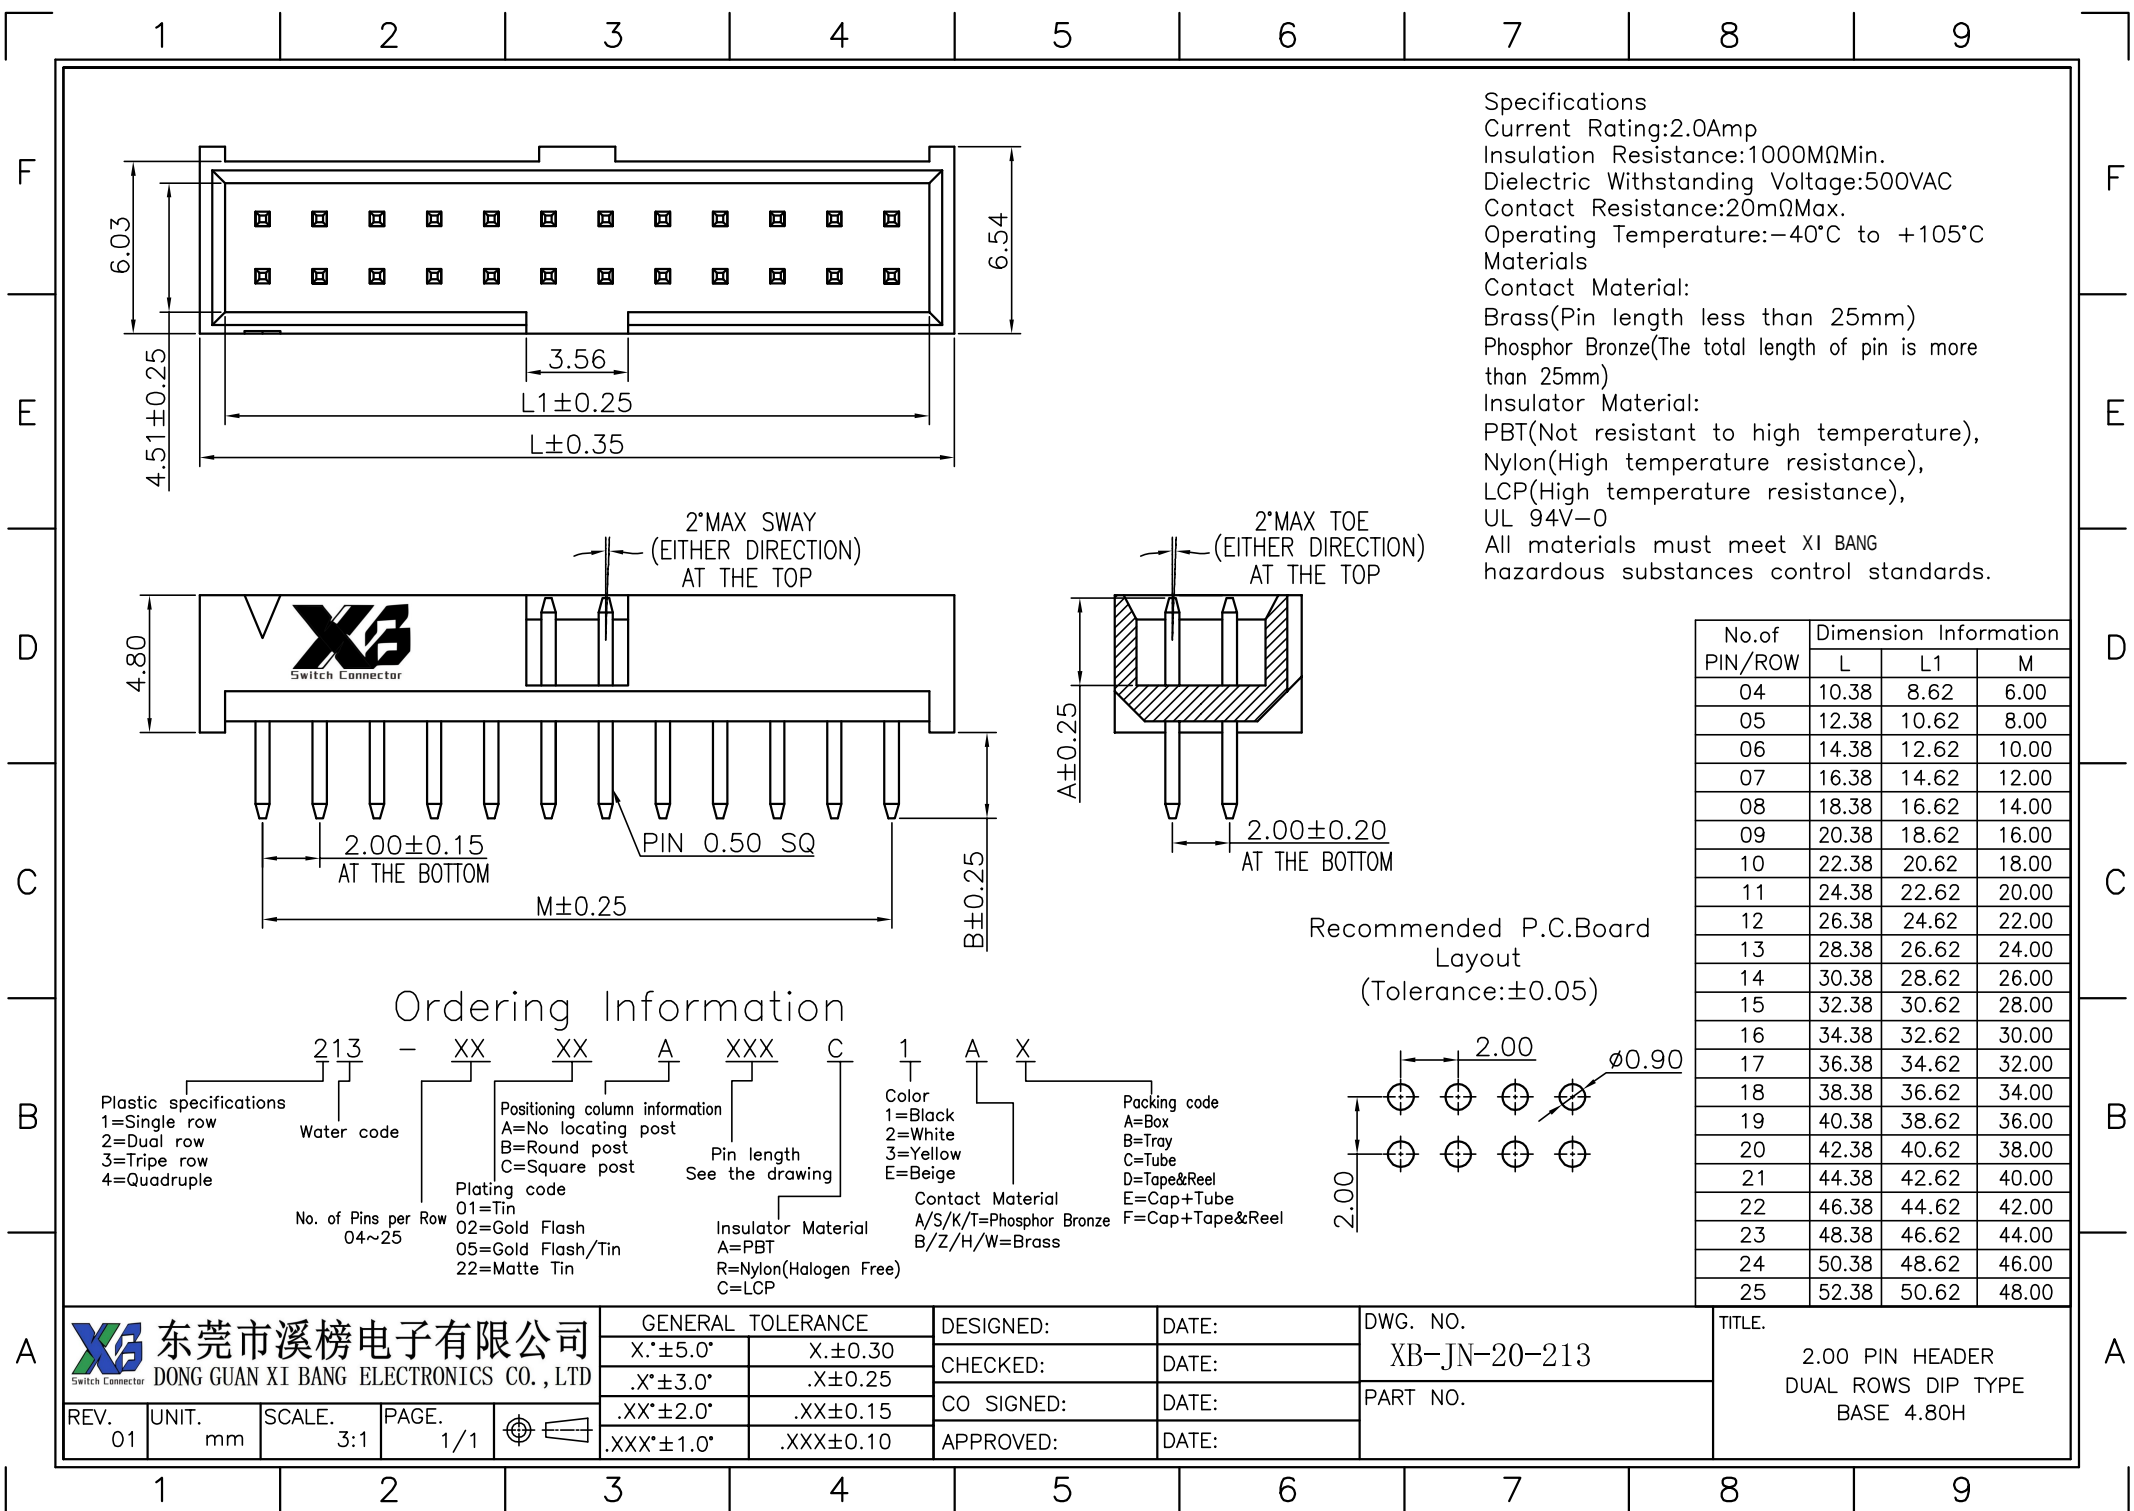

Specifications
Current Rating:2.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:500VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:
Brass(Pin length less than 25mm)
Phosphor Bronze(The total length of pin is more than 25mm)
Insulator Material:
PBT(Not resistant to high temperature),
Nylon(High temperature resistance),
LCP(High temperature resistance),
UL 94V-0
All materials must meet XI BANG
hazardous substances control standards.

No.of PIN/ROW	Dimension Information		
	L	L1	M
04	10.38	8.62	6.00
05	12.38	10.62	8.00
06	14.38	12.62	10.00
07	16.38	14.62	12.00
08	18.38	16.62	14.00
09	20.38	18.62	16.00
10	22.38	20.62	18.00
11	24.38	22.62	20.00
12	26.38	24.62	22.00
13	28.38	26.62	24.00
14	30.38	28.62	26.00
15	32.38	30.62	28.00
16	34.38	32.62	30.00
17	36.38	34.62	32.00
18	38.38	36.62	34.00
19	40.38	38.62	36.00
20	42.38	40.62	38.00
21	44.38	42.62	40.00
22	46.38	44.62	42.00
23	48.38	46.62	44.00
24	50.38	48.62	46.00
25	52.38	50.62	48.00

Recommended P.C.Board
Layout
(Tolerance:±0.05)

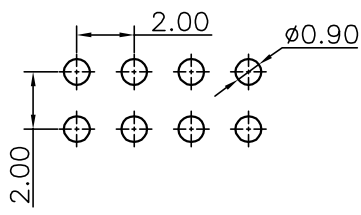

Ordering Information

213 - XX XX A XXX C 1 A X

Plastic specifications
1=Single row
2=Dual row
3=Tripe row
4=Quadruple

Water code

No. of Pins per Row
04~25

Positioning column information
A=No locating post
B=Round post
C=Square post

Plating code
01=Tin
02=Gold Flash
05=Gold Flash/Tin
22=Matte Tin

Pin length
See the drawing

Insulator Material
A=PBT
R=Nylon(Halogen Free)
C=LCP

Color
1=Black
2=White
3=Yellow
E=Beige

Contact Material
A/S/K/T=Phosphor Bronze
B/Z/H/W=Brass

Packing code
A=Box
B=Tray
C=Tube
D=Tape&Reel
E=Cap+Tube
F=Cap+Tape&Reel



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

GENERAL TOLERANCE		DESIGNED:	DATE:	DWG. NO.		TITLE. 2.00 PIN HEADER DUAL ROWS DIP TYPE BASE 4.80H
REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1	CHECKED:	DATE:	
				CO SIGNED:	DATE:	
				APPROVED:	DATE:	

XB-JN-20-213

PART NO.

