



F

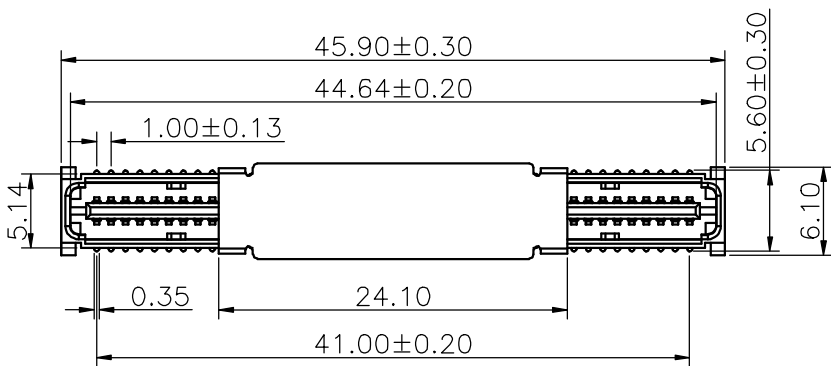


Specifications
 Current Rating:0.5Amp
 Insulation Resistance:500MΩMin.
 Dielectric Withstanding Voltage:200VAC
 Contact Resistance:30mΩMax.
 Operating Temperature:-40°C to +105°C
Materials
 Contact Material:Phosphor Bronze
 Insulator Material:
 LCP(High temperature resistance),
 UL 94V-0
 All materials must meet XI BANG
 hazardous substances control standards.

E

D

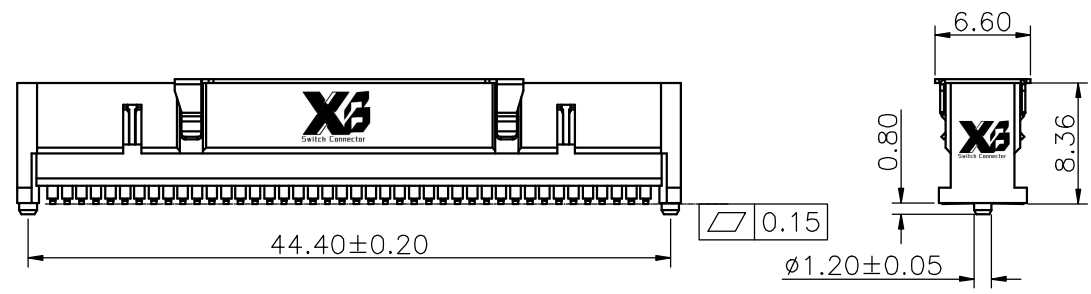

**Recommended P.C.Board
 Layout
 (Tolerance:±0.05)**

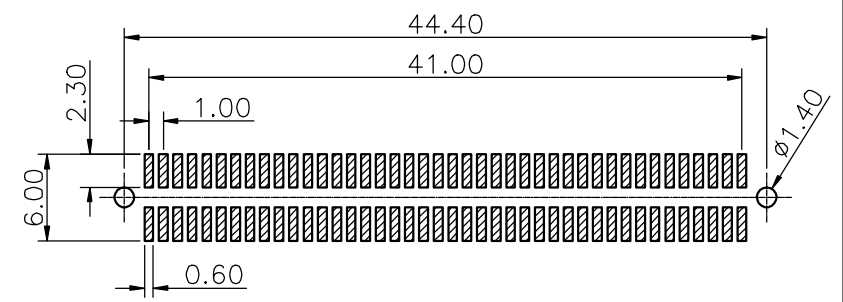

C

Ordering Information

XB-X-10-G-210 - 42 XX B XXX C 2 A X

Plastic specifications
 1=Single row
 2=Dual row
 3=Tripe row
 4=Quadruple

Water code

No. of Pins per Row
 42

Positioning column information
 A=No locating post
 B=Round post
 C=Square post

Pin length
 See the drawing

Plating code
 01=Tin
 02=Gold Flash
 05=Gold Flash/Tin
 22=Matte Tin

Insulator Material
 C=LCP

Color
 2=White

Contact Material
 A/S/K/T=Phosphor Bronze

Packing code
 C=Tube
 D=Tape&Reel
 E=Cap + Tube
 F=Cap+Tape&Reel

B

A

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	GENERAL TOLERANCE X:±5.0' X:±0.30 .X'±3.0' .X±0.25 .XX'±2.0' .XX±0.15 .XXX'±1.0' .XXX±0.10		DESIGNED:	DATE:	DWG. NO. XB-X-10-G-210	TITLE. 1.0mm PITCH BOARD TO BOARD MALE S.M.T TYPE		
	REV. 01	UNIT. mm	SCALE. 2:1	PAGE. 1/1			CHECKED:	DATE:
					CO SIGEND:		DATE:	PART NO.
					APPROVED:		DATE:	