

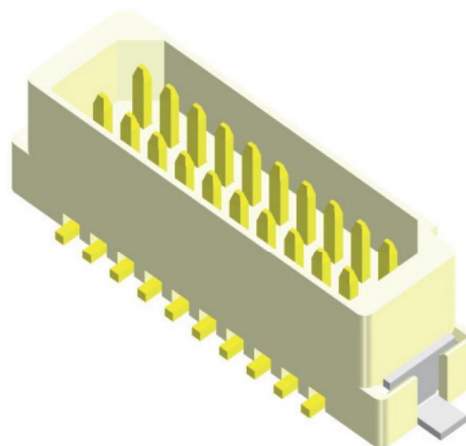
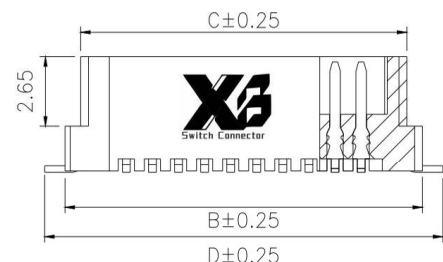

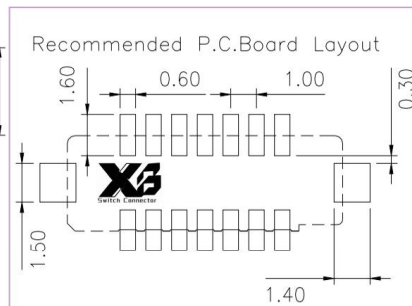


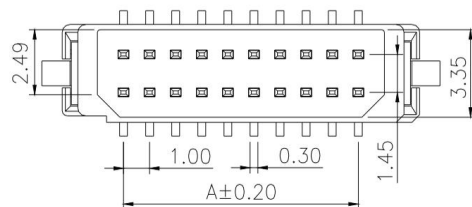


Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:
LCP(High temperature resistance),
UL 94V-0
All materials must meet XI BANG
hazardous substances control standards.

Mating with



B04



No. of Pins/Row	Dimension Information				No. of Pins/Row	Dimension Information			
	A	B	C	D		A	B	C	D
					11	10.00	14.70	13.50	16.26
					12	11.00	15.70	14.50	17.26
03	2.00	6.70	5.50	8.26	13	12.00	16.70	15.50	18.26
04	3.00	7.70	6.50	9.26	14	13.00	17.70	16.50	19.26
05	4.00	8.70	7.50	10.26	15	14.00	18.70	17.50	20.26
06	5.00	9.70	8.50	11.26					
07	6.00	10.70	9.50	12.26					
08	7.00	11.70	10.50	13.26					
09	8.00	12.70	11.50	14.26					
10	9.00	13.70	12.50	15.26					

XIB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

REV. 01 UNIT. mm SCALE. 5:1 PAGE. 1/1

GENERAL TOLERANCE	
X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED:
CHECKED:
CO SIGEND:
APPROVED:

DATE:
DATE:
DATE:
DATE:

DWG. NO.
XB-X-10-G-248
PART NO.

TITLE.
1.00 PITCH
FEMALE BOARD TO BOARD
SMT TYPE