


1 2 3 4 5 6 7 8 9

Specifications  
 Rated current: 1 A  
 Contact resistance: max 10 mΩ  
 Dielectric strength: min 300 V RMS  
 Mating pins: Outside Diameter 0.38 to 0.50 mm  
 Forces: (polished steel gauge  
 Outside Diameter 0.46 mm)

Insertion: 0.5 N typ  
 Withdrawal: 0.2 N typ

Materials  
 Contact Material: Brass  
 Insulation Material: High Temperature Thermoplastic UL94V-0 PPS  
 All materials must meet XI BANG hazardous substances control standards.

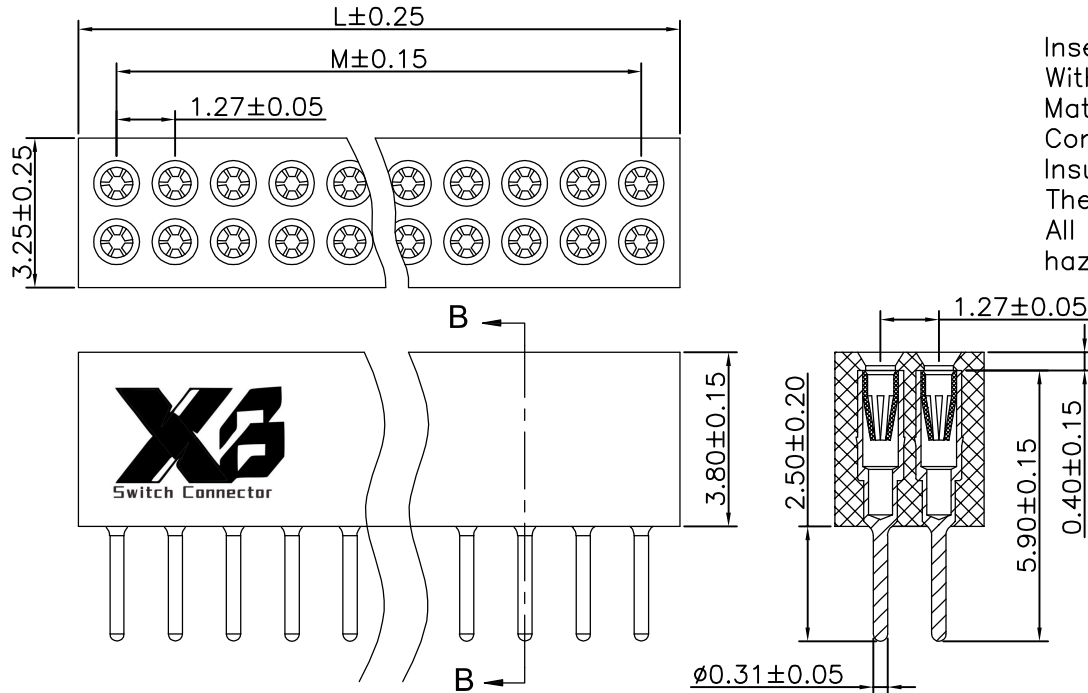

No. of PIN/ROW	Dimension Information	
	M	L
01	---	2.68
02	1.27	3.68
03	2.54	4.68
04	3.81	5.68
05	5.08	6.68
06	6.35	7.68
07	7.62	8.68
08	8.89	9.68
09	10.16	10.68
10	11.43	11.68
11	12.70	12.68
12	13.97	13.68
13	15.24	14.68
14	16.51	15.68
15	17.78	16.68
16	19.05	17.68
17	20.32	18.68
18	21.59	19.68
19	22.86	20.68
20	24.13	21.68
21	25.40	22.68
22	26.67	23.68
23	27.94	24.68
24	29.21	25.68
25	30.48	26.68
26	31.75	27.68
27	33.02	28.68
28	34.29	29.68
29	35.56	30.68
30	36.83	31.68
31	38.10	32.68
32	39.37	33.68
33	40.64	34.68
34	41.91	35.68
35	43.18	36.68
36	44.45	37.68
37	45.72	38.68
38	46.99	39.68
39	48.26	40.68
40	49.53	41.68

### Ordering Information

XB-PM-Y-127M - XX XX A 002 S X B X

No. of Pins per Row 01~40  
 Standard Plating 01=Tin 05=Gold Flash/Tin  
 Color 1=Black  
 Standard Packing C=Tube N=PE bag

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			3RD.ANG PROJ. 	GENERAL TOLERANCE X.*±3.0° X.±/ .X*±/ .X±0.30 .XX*±/ .XX±0.25 .XXX*±/ .XXX±0.20	DESIGNED: CHECKED: APPROVED:	DATE: DATE: DATE:	DWG. NO. XB-PM-Y-127M-201-A002 PART NO.	TITLE. 1.27mm SIP Socket L5.90 H3.80/4.10mm DIP Type
REV. A	UNIT. mm	SCALE. 1:1	PAGE. 1/1					

1 2 3 4 5 6 7 8 9