

F

E

D

C

B

A

M4

F




E

D

C

B


A

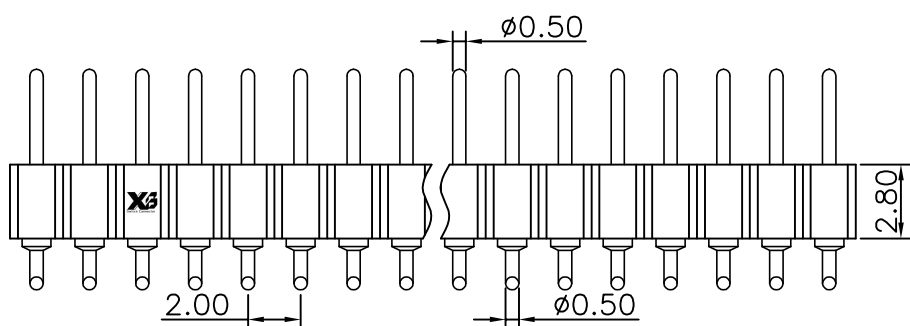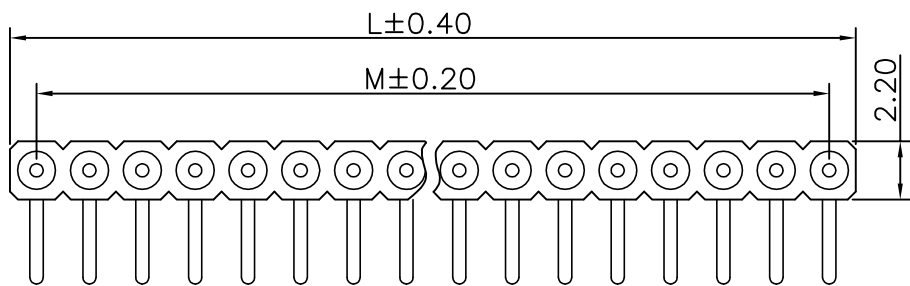

P.C.B LAYOUT

Specifications
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Operating voltage: 60VAC/DC
Operating temperatures: Gold Plated: -55°C to +105°C
Tin plated: -40°C to +105°C
Soldering temperature: +260°C, 10s max

Materials
Contact Material: Brass
Insulation Material: UL94V-0 PPS
All materials must meet XI BANG hazardous substances control standards.



No. of PIN/ROW	M	L
01	0.00	2.00
02	2.00	4.00
03	4.00	6.00
04	6.00	8.00
05	8.00	10.00
06	10.00	12.00
07	12.00	14.00
08	14.00	16.00
09	16.00	18.00
10	18.00	20.00
11	20.00	22.00
12	22.00	24.00
13	24.00	26.00
14	26.00	28.00
15	28.00	30.00
16	30.00	32.00
17	32.00	34.00
18	34.00	36.00
19	36.00	38.00
20	38.00	40.00
21	40.00	42.00
22	42.00	44.00
23	44.00	46.00
24	46.00	48.00
25	48.00	50.00
26	50.00	52.00
27	52.00	54.00
28	54.00	56.00
29	56.00	58.00
30	58.00	60.00
31	60.00	62.00
32	62.00	64.00
33	64.00	66.00
34	66.00	68.00
35	68.00	70.00
36	70.00	72.00
37	72.00	74.00
38	74.00	76.00
39	76.00	78.00
40	78.00	80.00

Ordering Information

102 - XX XX A 001 S X B X

No. of Pins per Row 01~40 Standard Plating 02=Gold Flash Color 1=Black Standard Packing C=Tube N=PE bag

东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO.,LTD

3RD.ANG PROJ.

PAGE. 1/1

GENERAL TOLERANCE	X.*±5.0*	X.±0.50
	.X*±/	.X±0.30
	.XX*±/	.XX±0.20
	.XXX*±/	.XXX±0.10

DESIGNED:

DATE:

CHECKED:

DATE:

APPROVED:

DATE:

DWG. NO.

XB-PM-Y-20X-102-A001

PART NO.

TITLE.

2.0mmPitch SIP Sockets

Single Row Right Angle Pin

Length 12.15mm