

1 2 3 4 5 6 7 8 9

F


E

D

C


B

A

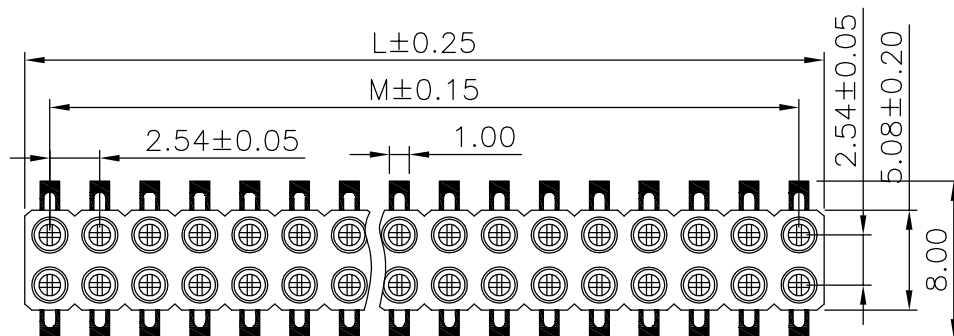

Specifications
Current Rating:3A
Dielectric Withstanding Voltage: 1000V RMS
Contact Resistance: 10mΩ Max.
Materials
Contact Material: Brass
Insulator Material:PPS,UL 94V-0
Contact clip: Beryllium copper(C17200)
Mating pins:Outside Diameter 0.64 to 0.90mm
Forces:(polished steel gauge ø0.76mm
Insertion: 1.2N tyo.
Withdrawal: 0.6N typ.
Coplanarity SMD terminations: 0.1mm Max.
Mechanical life:500 cycels Min.
All materials must meet XI BANG
hazardous substances control standards.

No. of PIN/ROW	M	L
01	0	2.34
02	2.54	4.88
03	5.08	7.42
04	7.62	9.96
05	10.16	12.50
06	12.70	15.04
07	15.24	17.58
08	17.78	20.12
09	20.32	22.66
10	22.86	25.20
11	25.40	27.74
12	27.94	30.28
13	30.48	32.82
14	33.02	35.36
15	35.56	37.90
16	38.10	40.44
17	40.64	42.98
18	43.18	45.52
19	45.72	48.06
20	48.26	50.60
21	50.80	53.14
22	53.34	55.68
23	55.88	58.22
24	58.42	60.76
25	60.96	63.30
26	63.50	65.84
27	66.04	68.38
28	68.58	70.92
29	71.12	73.46
30	73.66	76.00
31	76.20	78.54
32	78.74	81.08
33	81.28	83.62
34	83.82	86.16
35	86.36	88.70
36	88.90	91.24
37	91.44	93.78
38	93.98	96.32
39	96.52	98.86
40	99.06	101.6

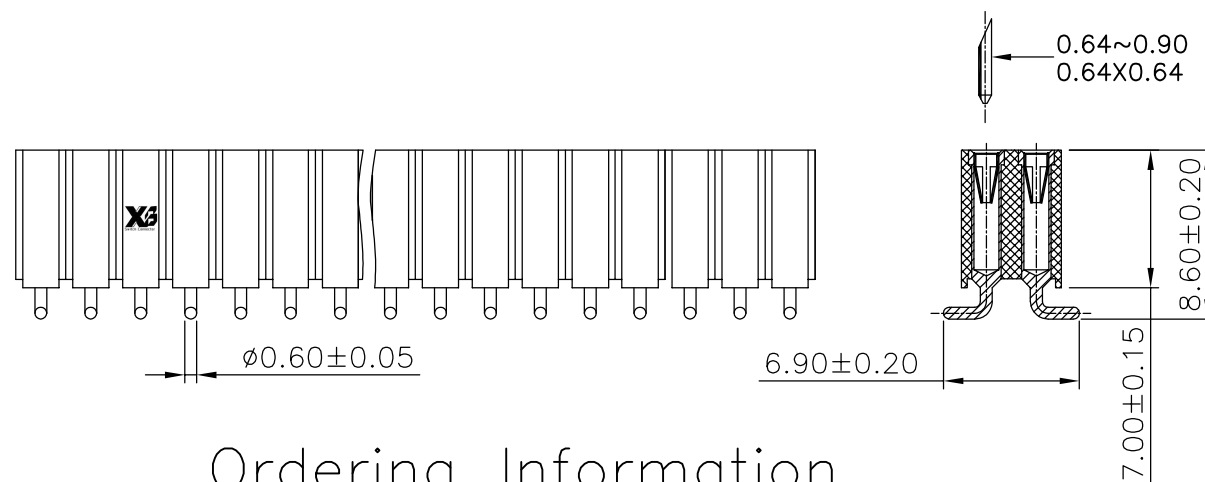

Ordering Information

201 - XX XX A 002 S X B X


No. Of Pins Per Row
01~40

Standard Plating
01=Tin
02=Gold Flash
05=Gold Flash/Tin

Color
1=Black

Standard Packing
D=T&R

 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

3RD.ANG
PROJ.

PAGE. 1/1

GENERAL TOLERANCE	
X.*±3'	X.±0.30
.X.*±3'	.X±0.25
.XX.*±3'	.XX±0.20
.XXX.*±3'	.XXX±/

DESIGNED:

DATE:

DWG. NO.

XB-PM-Y-254M-201-A002

TITLE.

2.54mm SIP Socket
Dououble ROW S.M.T TYPE
CONNECTOR

CHECKED:

DATE:

PART NO.

APPROVED:

DATE:

REV.
A

UNIT.
mm

SCALE.
1:1

AV

1 2 3 4 5 6 7 8 9

F

E

D

C

B

A