

F

E

D

C

B

A

AV

F

E




D

C

B

A

Technical Specs:
Insulator:Black glass filled polyester PPS-GF30-FR
Flammability:UL 94V-O
Contact: Brass CuZn36Pb3(C36000)
Rated current:3A
Contact resistance:max 10mΩ
Dielectric strength:min 1000 V RMS
Coplanarity SMD terminations:max 0.1 mm
(measured on 25 mm long connectors)
All materials must meet XI BANG
hazardous substances control standards.

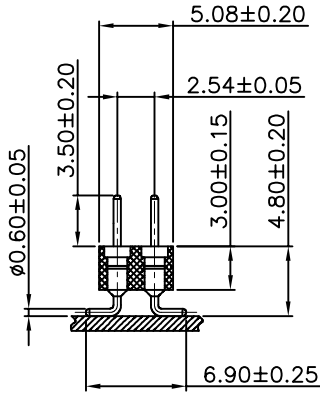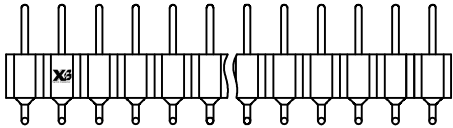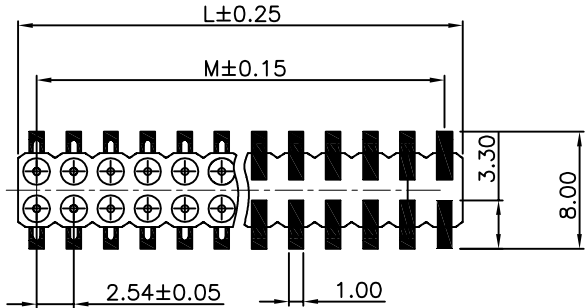

Ordering Information

202 - XX XX A 001 S X B X

No. of Pins per Row
01~40

Standard Plating
01=TIN
02=Gold Flash
B1=Gold 3U"

Color
1=Black

Standard Packing
D=Tape&Reel

No. of PIN/ROW	M	L
01	0	2.34
02	2.54	4.88
03	5.08	7.42
04	7.62	9.96
05	10.16	12.50
06	12.70	15.04
07	15.24	17.58
08	17.78	20.12
09	20.32	22.66
10	22.86	25.20
11	25.40	27.74
12	27.94	30.28
13	30.48	32.82
14	33.02	35.36
15	35.56	37.90
16	38.10	40.44
17	40.64	42.98
18	43.18	45.52
19	45.72	48.06
20	48.26	50.60
21	50.80	53.14
22	53.34	55.68
23	55.88	58.22
24	58.42	60.76
25	60.96	63.30
26	63.50	65.84
27	66.04	68.38
28	68.58	70.92
29	71.12	73.46
30	73.66	76.00
31	76.20	78.54
32	78.74	81.08
33	81.28	83.62
34	83.82	86.16
35	86.36	88.70
36	88.90	91.24
37	91.44	93.78
38	93.98	96.32
39	96.52	98.86
40	99.06	101.6

 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

3RD.ANG
PROJ.

PAGE. 1/1

GENERAL TOLERANCE	
X.*±3.0°	X.±/
.X*±3.0°	.X±0.30
.XX*±3.0°	.XX±0.25
.XXX*±3.0°	.XXX±0.20

DESIGNED:	DATE:
CHECKED:	DATE:
APPROVED:	DATE:

DWG. NO. XB-PM-Y-254X-202-A001
PART NO. GKHC202

TITLE. 2.54mm PIN Connectors H=3.00mm SMT
