


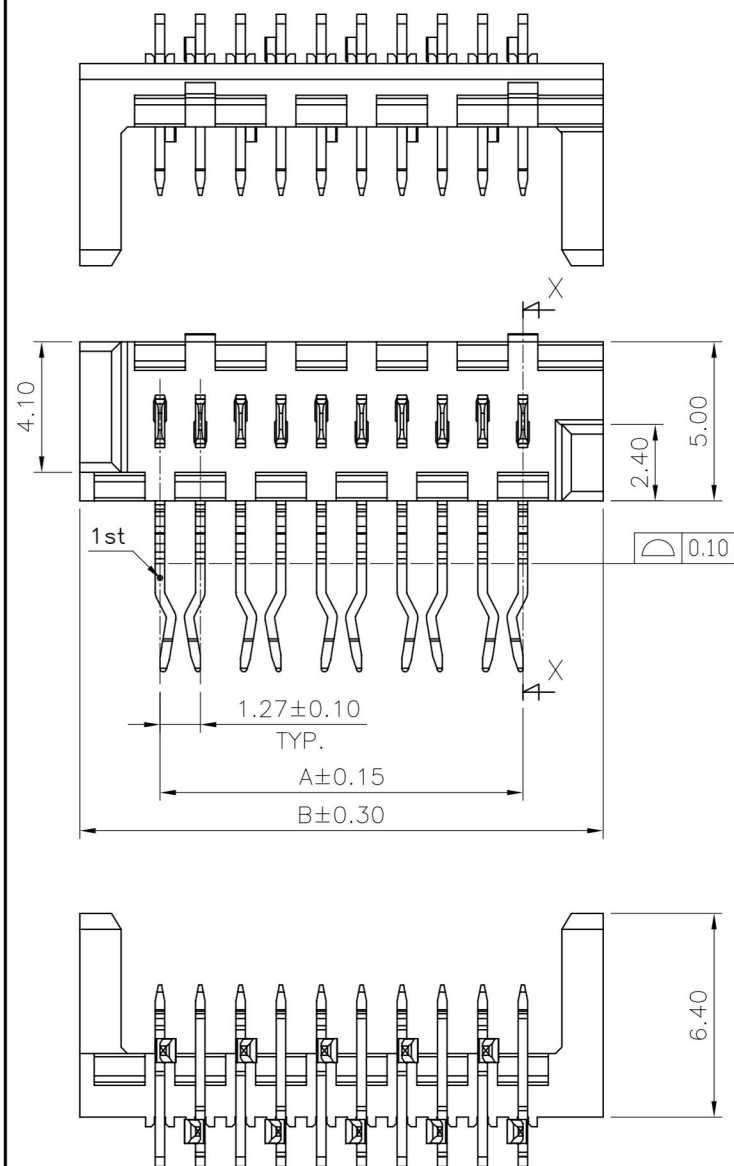

Material:

* Insulation:

Base: Nylon 6T +30% G.F UL 94V-0 (無鹵材質)

Contact: Brass

Ordering Code:

CA35 ** H 1 1 00 - NH
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.:

② No. of Circuits: 04 to 26

③ Contacts Type: H= DIP Right Angle Type

④ Plating option:


1= Tin over Nickel plated

(Matte Tin plated)

⑤ Color: 1= Black

⑥ Option: 00= Standard

⑦ NH= For Lead Free IR Processes and Halogen-Free

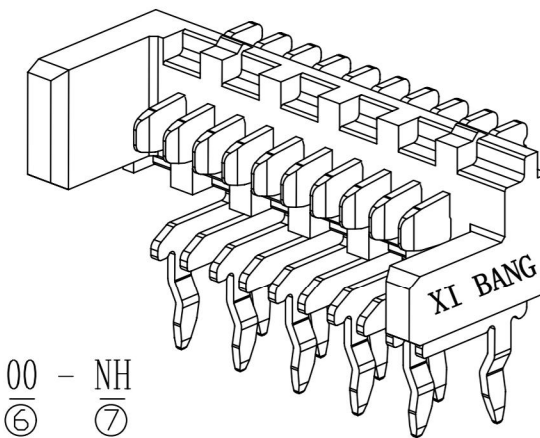


DIM.A= 1.27 x No. of Spaces

DIM.B= DIM.A + 5.05

*Available in 4 ~ 26 Circuits

Recommended
P.C. Board Layout

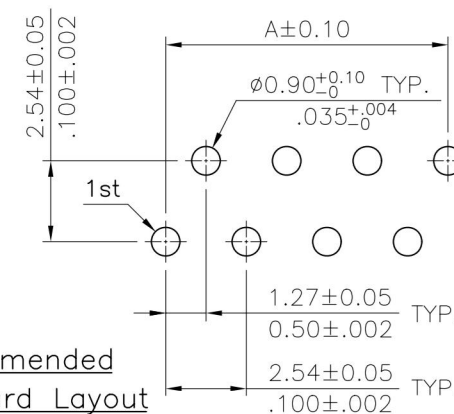

Halogen-Free

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 1.27mm Pitch DIP R/A Type Connector	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
3				DRAWN BY:	Clark	1/15-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:	DRAWING NO.	CA3503SA	PART NO.
2				ENGINEER:	Clark	1/18-10'	.X ± 0.30/.012 X" ± 1"		FINISH:				
1				CHECKED BY:	Eisley	1/22-10'	.XX ± 0.20/.008 X" ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	1/22-10'	.XXX ± 0.10/.004 XX" ±						