
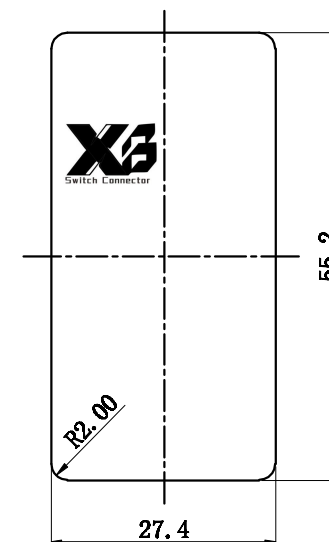
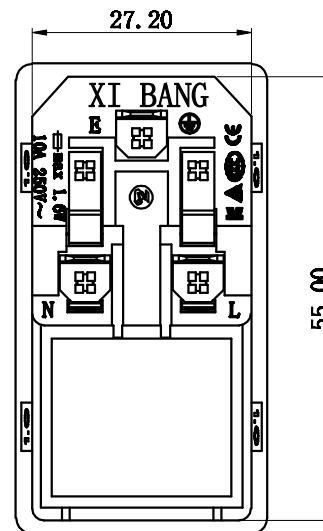
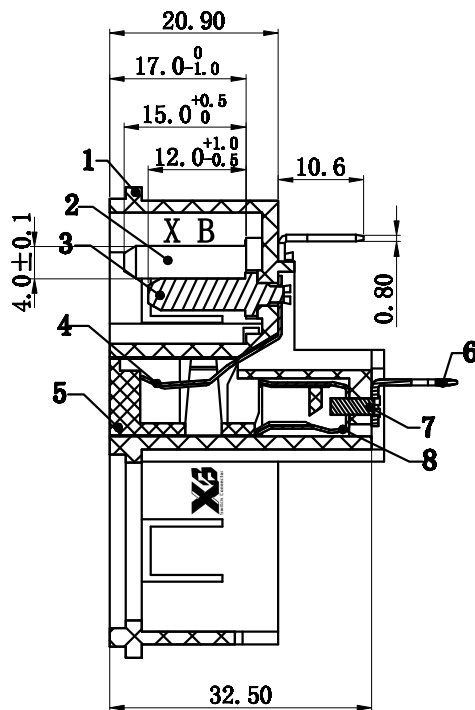


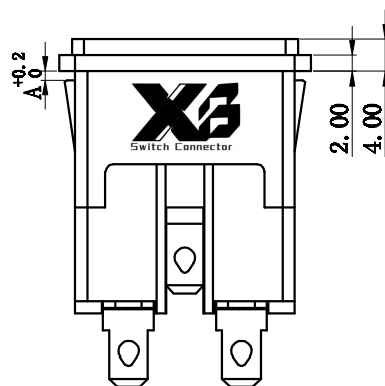

PANEL CUT-OUT


$$\text{H}-\text{H}$$

序号	名称	材质	数量
1	基座	PA66	1
2	接地插销	黄铜t2.0	1
3	载流插销	黄铜t2.0	2
4	接触弹片	黄铜t0.5	2
5	保险盖	PA66	1
6	快插端子	黄铜t0.8	3
7	铆钉	黄铜t2.0	2
8	保险夹	黄铜t0.4	2

CODE	DIMENSION
A	1.0
	2.0
	3.0

Rating :

10A 250V AC KC TUV 3C CE

FUSE: 250V max 1.6W

Insert And Extract Force: 1.36kgf~6.8kgf

Terminal Strength: $\geq 80N$

Operating Life: ≥ 5000 cycles

Withstand Voltage: Between all terminals:2500VAC (50-60Hz)1min

terminals to Base:3750V AC (50-60Hz) 1min

Leakage Current : 1mA

Insulation Resistance: $\geq 100\text{M}\Omega$ 500V DC

A4				普通公差		XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD							
A3				COMMON TOLERANCE :									
A2				UP TO 5	±0.20	单 位	mm	投 影		品 名	Ac Inlet C14型	比 例	Free
A1				ABOVE 5 TO 30	±0.30	绘 图	高鹏	核 对	贺龙飞	型 号	XB-AC-14-F15LZ		
				ABOVE 30	±0.50	DATE		CHECKED BY		MODEL NO.			
REV.	DATE	REVISION	DESCRIPTION	ISSUE	ANGULAR	日 期	2021. 4. 28	核 准	庞东	图 号			
					±5°	DATE		APPROVAL BY		DWG NO.			