
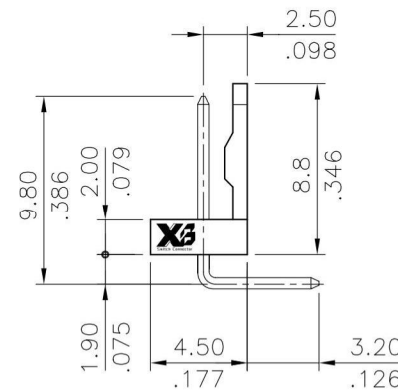
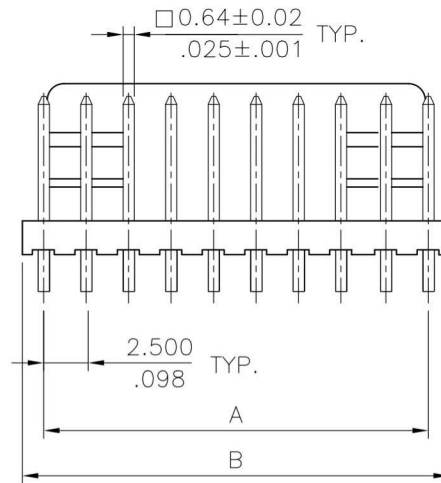

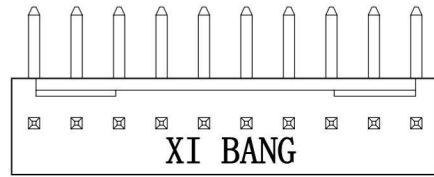


Recommended P.C. Board Layout

Material:
* Insulation: Nylon 66 UL 94V-2
Color Nature
* Contact: Brass



Circuits	Dimension	
	A	B
2	2.50(.098)	5.0(.197)
3	5.00(.197)	7.5(.295)
4	7.50(.295)	10.0(.394)
5	10.00(.394)	12.5(.492)
6	12.50(.492)	15.0(.591)
7	15.00(.591)	17.5(.689)
8	17.50(.689)	20.0(.787)
9	20.00(.787)	22.5(.886)
10	22.50(.886)	25.0(.984)
11	25.00(.984)	27.5(1.083)
12	27.50(1.083)	30.0(1.181)

2 THROUGH 5
CIRCUITS

△ 6 THROUGH 12
CIRCUITS

Halogen-Free

Tin-Lead Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 2.50MM(.098")	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
3				DRAWN BY:	Jim	05/20-06'	RIGHT ANGLE HEADERS				
2				ENGINEER:	Eisley	05/20-06'	MATERIAL:	DRAWING NO.	CI2303SB	PART NO.	CI23**P1H00
1	Jim	5/17/06'	ECR06036-0/ECN06143	CHECKED BY:	Alex	05/20-06'	FINISH:				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	05/20-06'					
						TOLERANCE UNLESS OTHERWISE SPECIFIED					
						.X ± 0.30 / .012 X: ± 1"					
						.XX ± 0.20 / .008 .X" ±					
						.XXX ± 0.10 / .004 .XX" ±					