
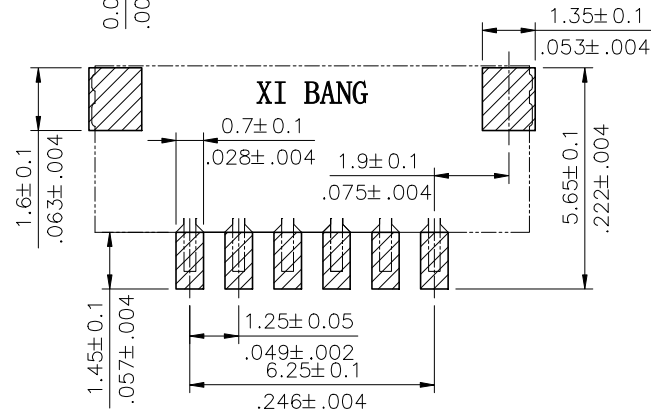


NOTE:

Material :

- \* Base : High Temperature plastic UL 94V-0  
Color Black
- \* Contact : Copper alloy
- \* Fixed tab : Matte Tin plated over Nickel

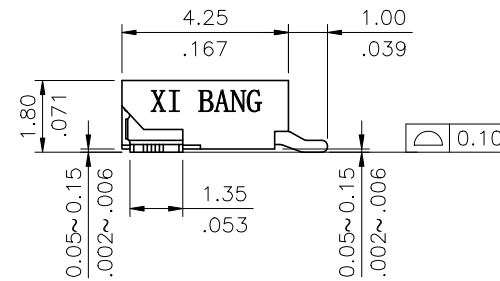

Recommended P.C. Board Layout

ORDERING CODE


CI43 06 M 1 H R D -NH  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧


- ① Series No.
- ② Contact: 06
- ③ M= SMT Type Header
- ④ Plating :  
1 = 120u" Matte Tin plated over  
50u" Nickel
- ⑤ Type : H= Side entry
- ⑥ Packing option:  
R= Tape & Reel Packing
- ⑦ Other option:  
D= Special Type
- ⑧ -NH= For Lead Free IR Processes and  
Halogen-Free

Halogen-Free

Lead Free Process

RoHS Compliant



④					DATE	UNIT: mm / inch	TITLE: 1.25mm Pitch WTB SMT R/A TYPE	 <b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONICS CO., LTD.
③				DRAWN BY: Hank	7/31-14'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
②				ENGINEER: Eisley	7/31-14'	.X ± 0.30/.012 X' ± 1'	DRAWING NO. CI4313S1 PART NO. CI4306M1HRD-NH	
①				CHECKED BY: Eisley	7/31-14'	.XX ± 0.20/.008 X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	7/31-14'	.XXX ± 0.10/.004 XX' ±		

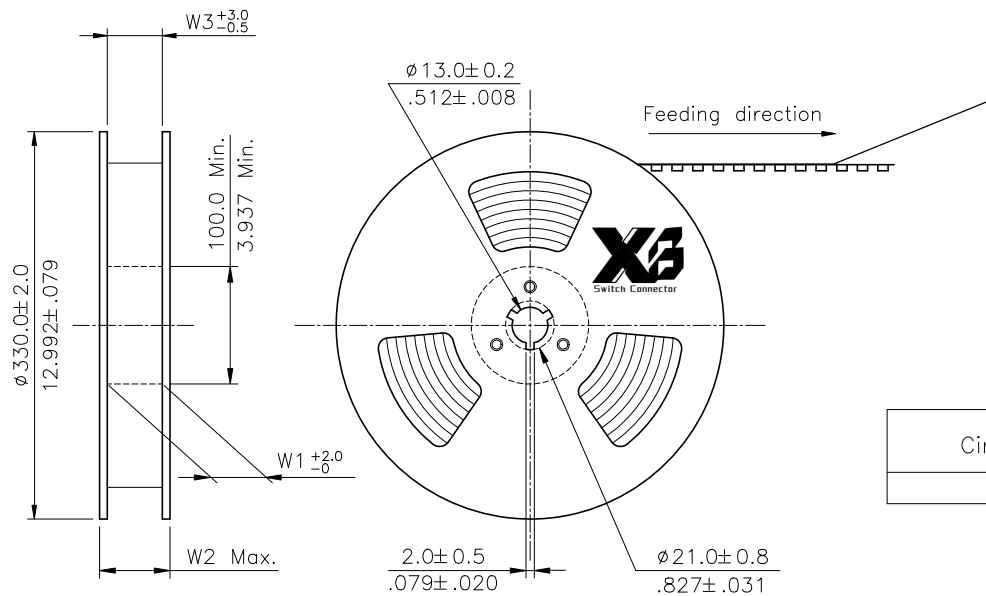


NOTES:

1. 10 sprocket hole pitch cumulative tolerance  $\pm 0.20$
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black, Polystyrene alloy
4. All dimensions meet EIA-481-C requirements.
5. Thickness :  $0.30 \pm 0.05$ mm.
6. Packing length per 22" Reel : 92.4 Meters.
7. Component load per 13" Reel : 2500 pcs.

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
6	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9

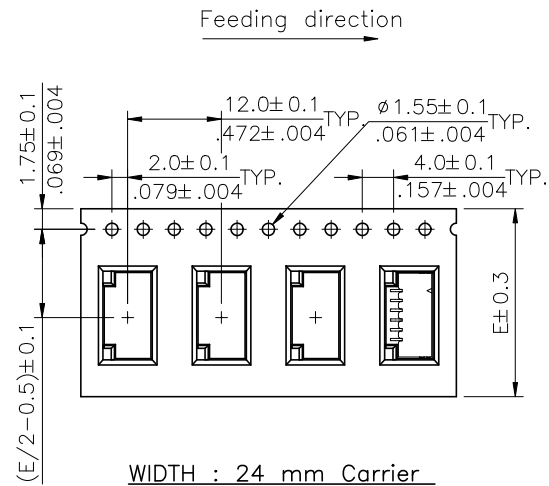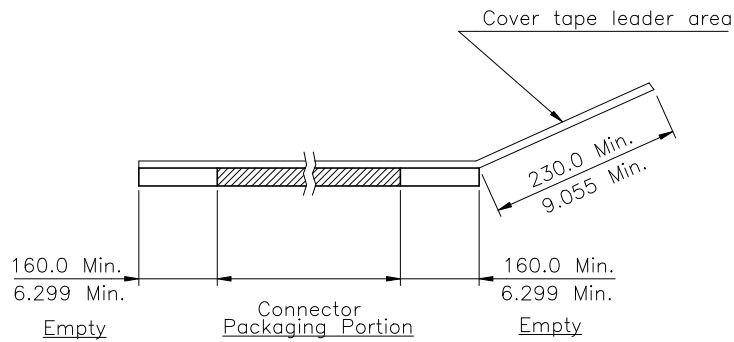

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.25mm Pitch WTB SMT R/A TYPE	 <b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY: Hank	7/31-14'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
2				ENGINEER: Eisley	7/31-14'	.X ±	.X' ± 1'	DRAWING NO. CI4313S1
1				CHECKED BY: Eisley	7/31-14'	.XX ±	.X' ±	PART NO. CI4306M1HRD-NH
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	7/31-14'	.XXX ±	.XX ±	SCALE
								SHEET 2 OF 2