
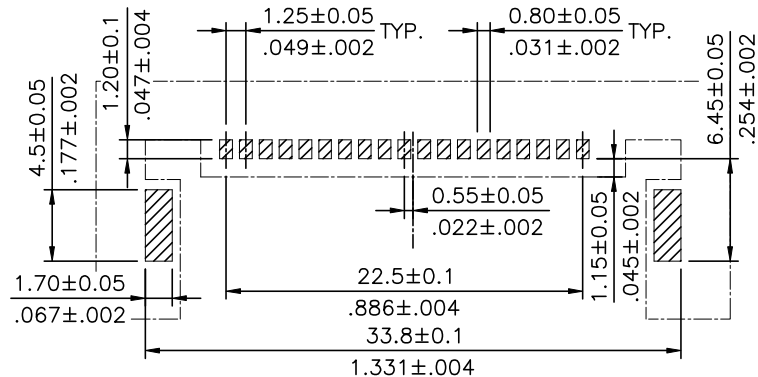



SEC. E-E

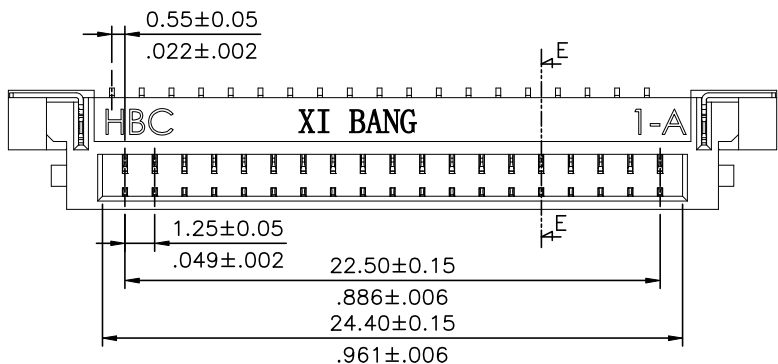

Recommended P.C. Board Layout

Ordering Code:

CI45 19 M 1 H R0 - NH  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of Circuits: 19 Pin
- ③ M= SMT type header
- ④ Plating: 1= 3.05um(120u") ~ 4.88um(192u")  
Matte Tin over 1.27um(50u") Nickel
- ⑤ Type: H= Side Entry
- ⑥ Packing Options: R0= Tape & Reel packing
- ⑦ Other option:  
-NH= For Lead Free IR Processes and Halogen-Free

Halogen-Free


Lead Free Process

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 1.25mm Pitch WTB SMT R/A TYPE
③				DRAWN BY: Jack	12/25-23'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:
②				ENGINEER: Sun	12/25-23'		
①	Jack	12/25-23'	ECNT123179/ECRB123029	CHECKED BY: Eisley	12/25-23'	.X ± 0.30/.012	.X' ± 1'
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	12/25-23'	.XX ± 0.20/.008	.X' ±
						.XXX ± 0.10/.004	.XX' ±



**X3** 东莞市溪榜电子有限公司  
 Switch Connector DONG GUAN XI BANG ELECTRONI CS CO., LTD.

DRAWING NO.	CI4501SB	PART NO.	CI4519M1HR0-NH
SCALE	3 / 1	SHEET	1 OF 2

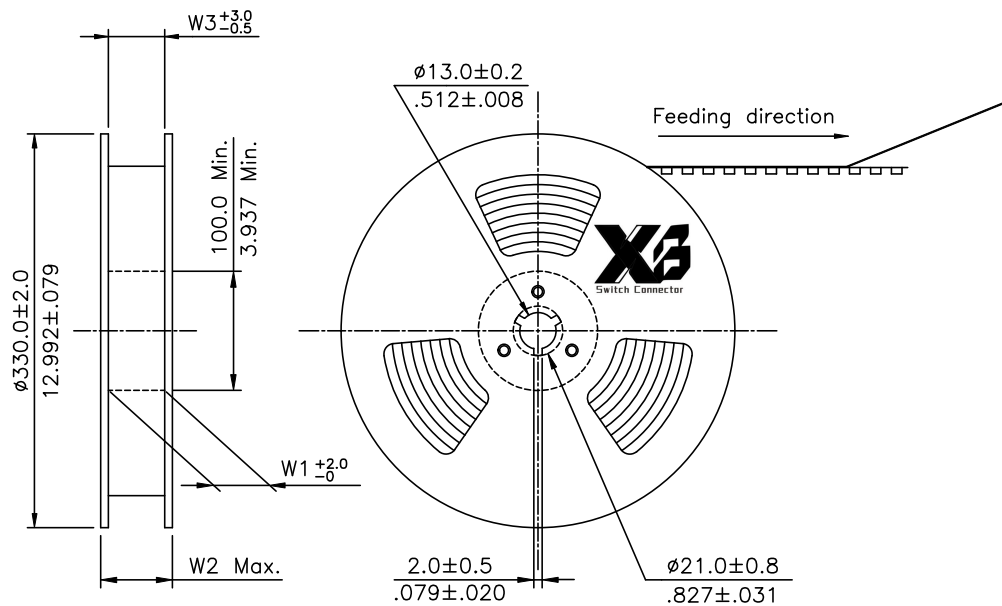


NOTES:

1. Reel Material : HIPS
2. 10 sprocket hole pitch cumulative tolerance  $\pm 0.20$
3. Carrier camber is within 1 mm in 250 mm.
4. Material :Transparent Anti-static Polysyrene.
5. All dimensions meet EIA-481 requirements.
6. Thickness :  $0.40 \pm 0.05$ mm.
7. Quantity : 700 pcs.

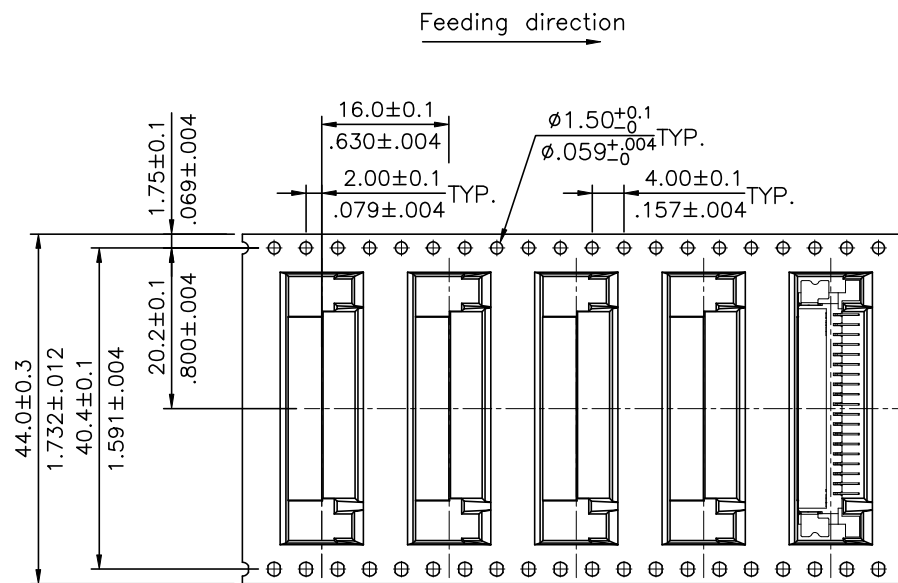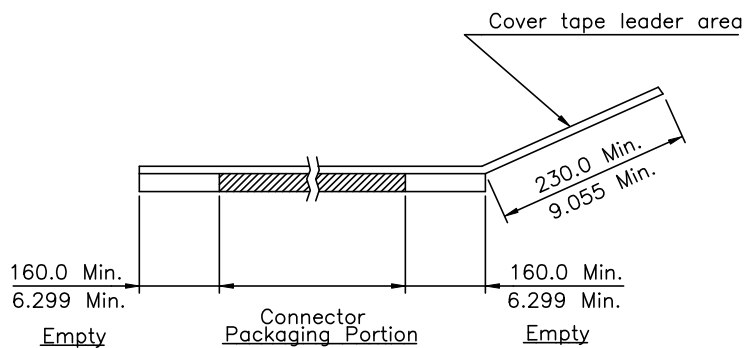

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.25mm Pitch WTB SMT R/A TYPE	 <b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONICS CO., LTD.	
3				DRAWN BY: Jack	12/25-23'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
2				ENGINEER: Sun	12/25-23'	.X ±	.X' ± 1'	DRAWING NO. CI4501SB	
1	Jack	12/25-23'	ECNT123179/ECRB123029	CHECKED BY: Easley	12/25-23'	.XX ±	.X' ±		PART NO. CI4519M1HRO-NH
SYM	NAME	DATE	REVISIONS	APPROVED BY: Easley	12/25-23'	.XXX ±	.XX' ±	SCALE	SHEET 2 OF 2