
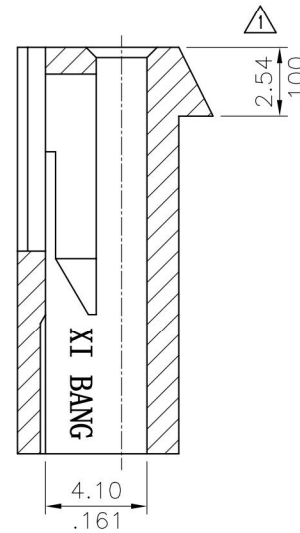
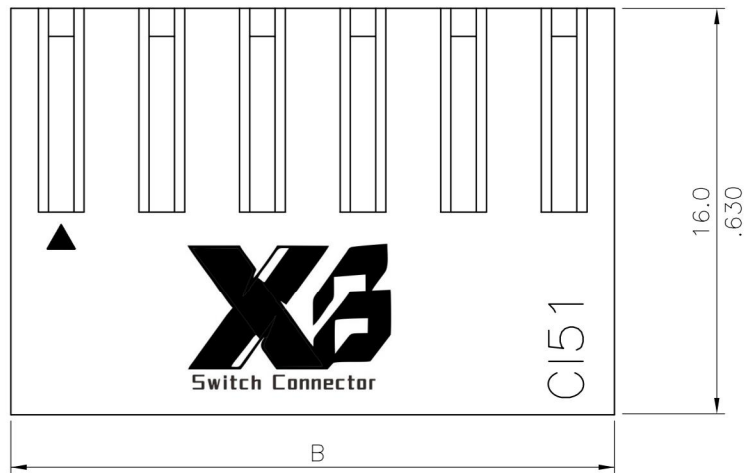


Material: Nylon 66 UL 94V-2
Color Nature

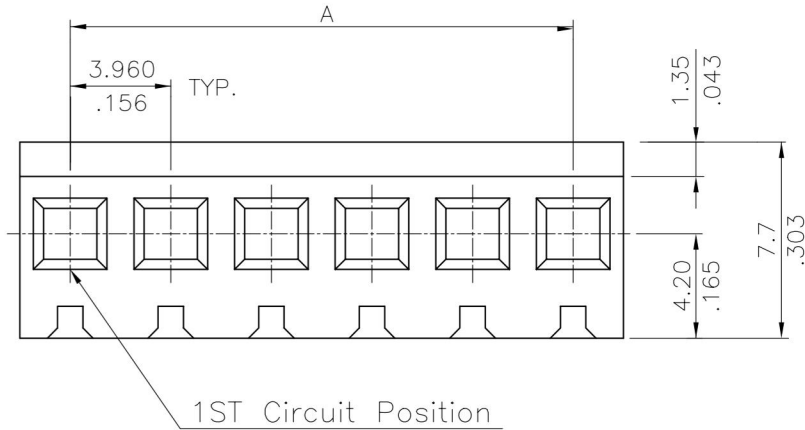

Circuits	Dimension	
	A	B
2	3.96(.156)	8.0(.315)
3	7.92(.312)	12.0(.472)
4	11.88(.468)	15.9(.626)
5	15.84(.624)	19.9(.783)
6	19.80(.780)	23.9(.941)
7	23.76(.935)	28.0(1.102)
8	27.72(1.091)	32.0(1.260)
9	31.68(1.247)	35.9(1.413)
10	35.64(1.403)	39.9(1.571)
11	39.60(1.559)	43.9(1.728)
12	43.56(1.715)	47.8(1.882)
13	47.52(1.871)	51.8(2.039)
14	51.48(2.027)	55.7(2.193)
15	55.44(2.183)	59.7(2.350)
16	59.40(2.339)	63.7(2.508)
17	63.36(2.494)	67.6(2.661)
18	67.32(2.650)	71.6(2.819)
19	71.28(2.806)	75.5(2.972)
20	75.24(2.962)	79.5(3.130)

Halogen-Free
RoHS Compliant

SYMBOL	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT:	TITLE:	MATERIAL:	FINISH:
4					DATE	mm / inch	3.96MM(.156")		
3				DRAWN BY: Casey	03/14-05'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER: Eisley	03/16-05'	.X ± 0.38/.015	X' ± 1"		
1	Casey	3/9/05'	ECN05067/ECR05015-0	CHECKED BY: David	03/22-05'	.XX ± 0.25/.010	.X' ±		
				APPROVED BY: Alex	03/22-05'	.XXX ± 0.10/.004	.XX' ±		

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DRAWING NO. CI5101SD PART NO. CI51**S000*

SCALE 2 / 1 SHEET 1 OF 1




Notes:

1. Material:
Insulation: Nylon 6 UL 94V-2 Color Nature
2. Glow wire requirement:
IEC 60695-2-12 GWFI 960°C@0.38mm & 930°C@0.75mm
& 960°C@1.50mm & 960°C@3.00mm
IEC 60695-2-11 GWEPT 750°C ≤2S

Ordering Code:


CI51 ** S 000M
① ② ③ ④




- ① Series No.
- ② No. of Circuits
- ③ S=Connector housing
- ④ Other option: 000M= Standard
(Glow wire available)

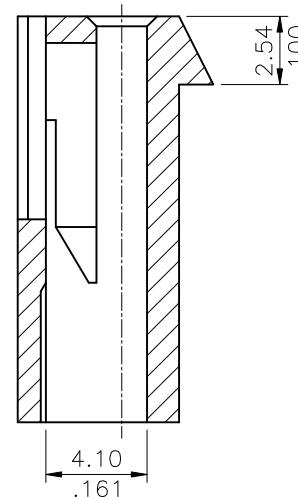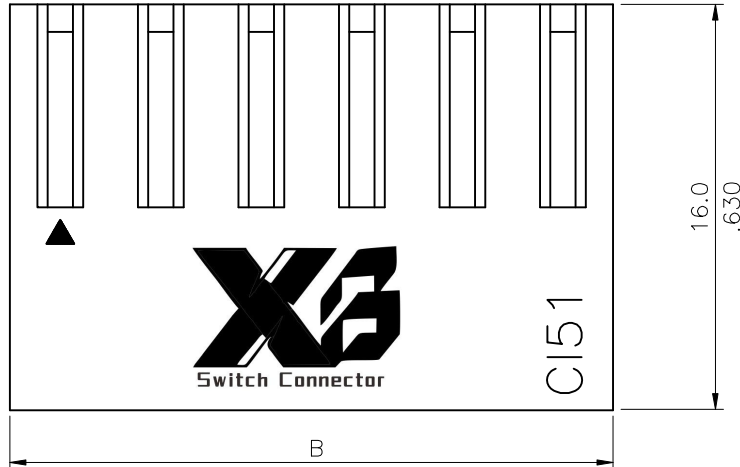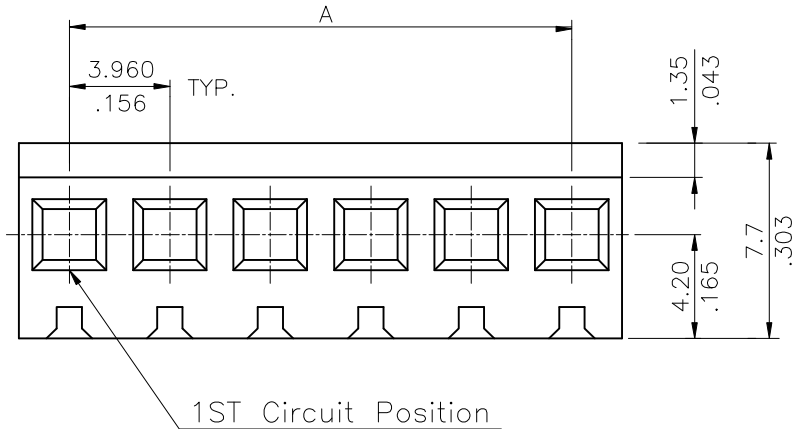

Circuits	Dimension	
	A	B
2	3.96(.156)	8.0(.315)
3	7.92(.312)	12.0(.472)
4	11.88(.468)	15.9(.626)
5	15.84(.624)	19.9(.783)
6	19.80(.780)	23.9(.941)
7	23.76(.935)	28.0(1.102)
8	27.72(1.091)	32.0(1.260)
9	31.68(1.247)	35.9(1.413)
10	35.64(1.403)	39.9(1.571)
11	39.60(1.559)	43.9(1.728)
12	43.56(1.715)	47.8(1.882)
13	47.52(1.871)	51.8(2.039)
14	51.48(2.027)	55.7(2.193)
15	55.44(2.183)	59.7(2.350)
16	59.40(2.339)	63.7(2.508)
17	63.36(2.494)	67.6(2.661)
18	67.32(2.650)	71.6(2.819)
19	71.28(2.806)	75.5(2.972)
20	75.24(2.962)	79.5(3.130)

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 3.96MM(.156")	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
③				DRAWN BY: Kenny	8/26-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED	CRIMP TERMINAL HOUSING	
②				ENGINEER: Sun	9/1-20'	.X ± 0.38/.015	MATERIAL:	DRAWING NO. CI5144SB PART NO. CI51**S000M
①	Kenny	8/26-20'	ECNT120227	CHECKED BY: Eisley	9/4-20'	.XX ± 0.25/.010	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	9/4-20'	.XXX ± 0.10/.004		

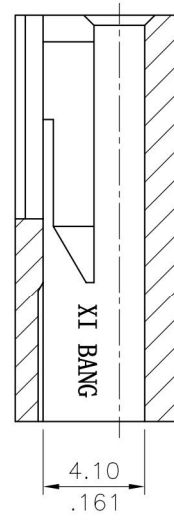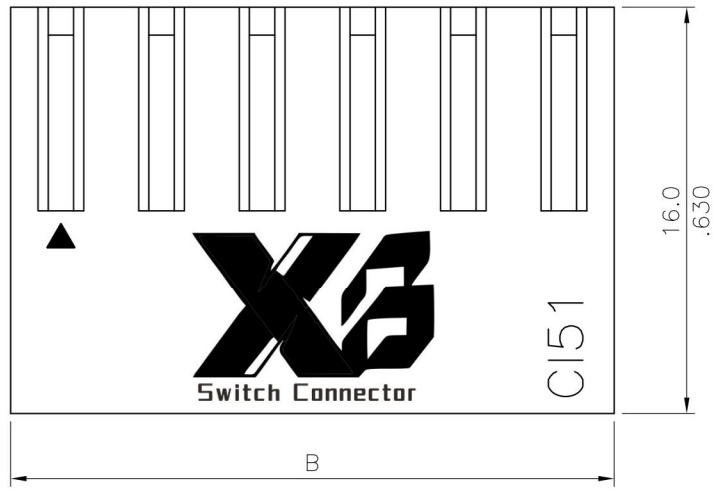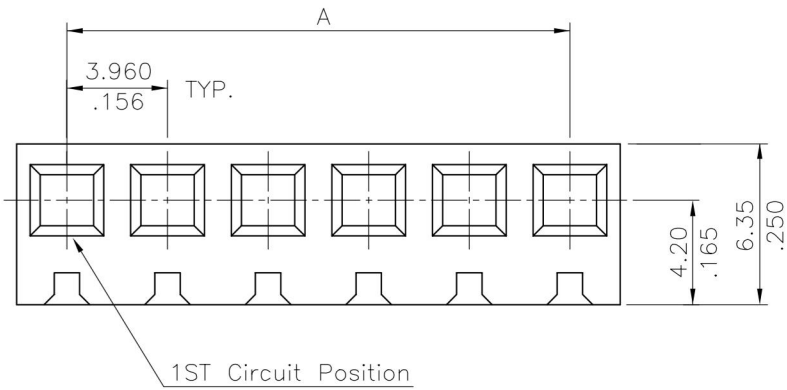


Material: Nylon 66 UL 94V-2
Color Nature


Circuits	Dimension	
	A	B
2	3.96(.156)	8.0(.315)
3	7.92(.312)	12.0(.472)
4	11.88(.468)	15.9(.626)
5	15.84(.624)	19.9(.783)
6	19.80(.780)	23.9(.941)
7	23.76(.935)	28.0(1.102)
8	27.72(1.091)	32.0(1.260)
9	31.68(1.247)	35.9(1.413)
10	35.64(1.403)	39.9(1.571)
11	39.60(1.559)	43.9(1.728)
12	43.56(1.715)	47.8(1.882)
13	47.52(1.871)	51.8(2.039)
14	51.48(2.027)	55.7(2.193)
15	55.44(2.183)	59.7(2.350)
16	59.40(2.339)	63.7(2.508)
17	63.36(2.494)	67.6(2.661)
18	67.32(2.650)	71.6(2.819)
19	71.28(2.806)	75.5(2.972)
20	75.24(2.962)	79.5(3.130)

Halogen-Free

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 3.96MM(.156") CRIMP TERMINAL HOUSING	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
4								
3				DRAWN BY: Sandy	12/22-00'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
2				ENGINEER: Sandy	12/22-00'	.X ± 0.38/.015	X.' ± 1'	
1				CHECKED BY: Alex	12/22-00'	.XX ± 0.25/.010	.X' ±	
				APPROVED BY: Alex	12/22-00'	.XXX ± 0.10/.004	.XX' ±	
DRAWING NO.		CI5107SA		PART NO.		CI51**S000R		
SCALE		2 / 1		SHEET		1 OF 1		

Material: Nylon 66 UL 94V-2
Color Nature

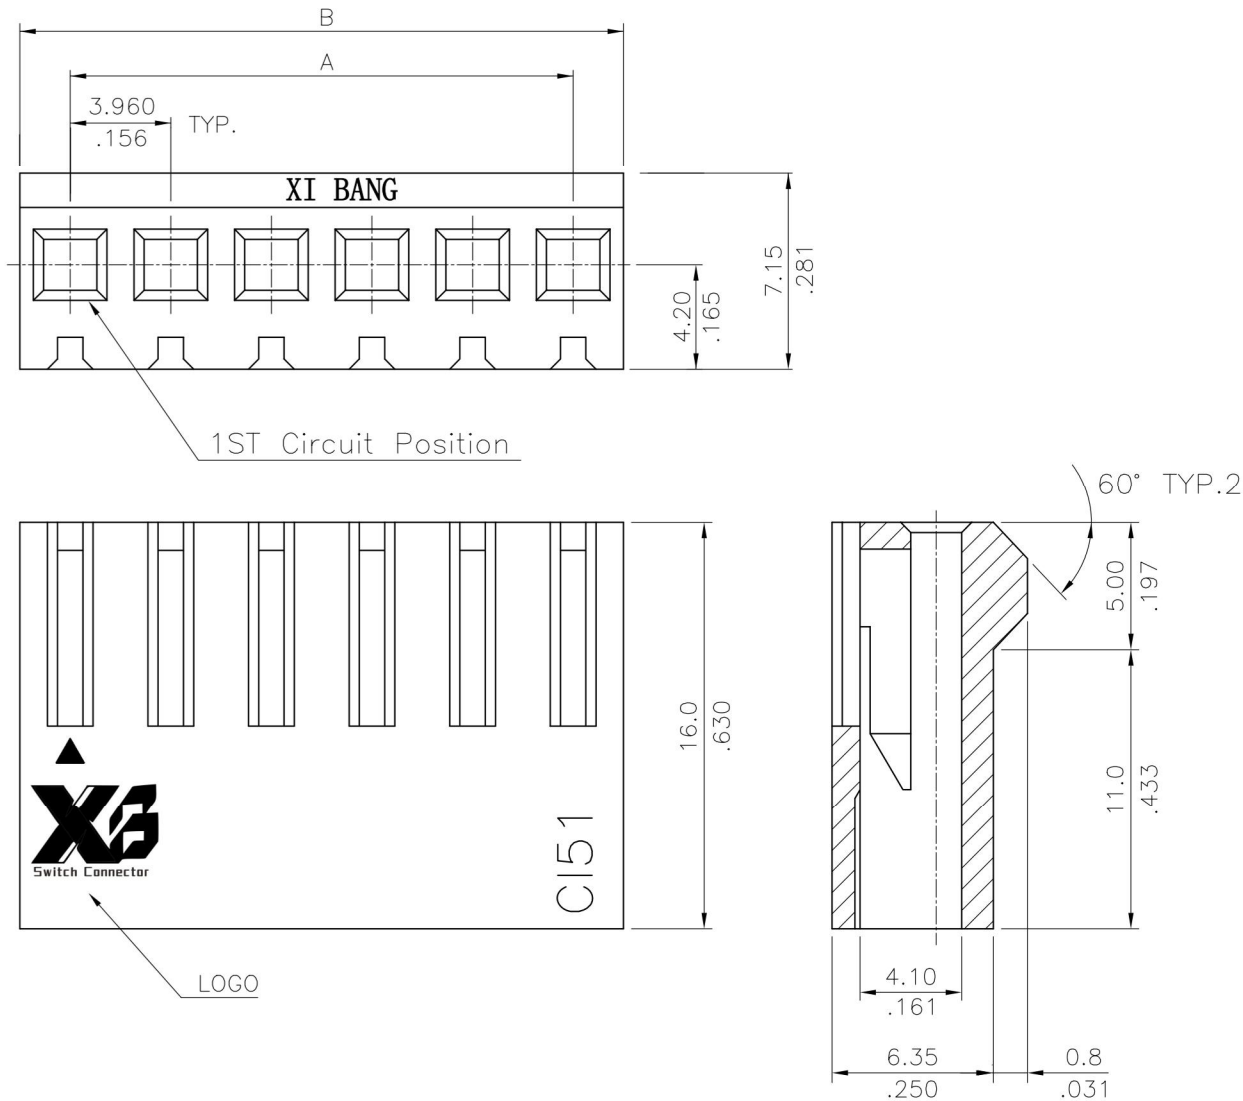

Circuits	Dimension	
	A	B
2	3.96(.156)	8.0(.315)
3	7.92(.312)	12.0(.472)
4	11.88(.468)	15.9(.626)
5	15.84(.624)	19.9(.783)
6	19.80(.780)	23.9(.941)
7	23.76(.935)	28.0(1.102)
8	27.72(1.091)	32.0(1.260)
9	31.68(1.247)	35.9(1.413)
10	35.64(1.403)	39.9(1.571)
11	39.60(1.559)	43.9(1.728)
12	43.56(1.715)	47.8(1.882)
13	47.52(1.871)	51.8(2.039)
14	51.48(2.027)	55.7(2.193)
15	55.44(2.183)	59.7(2.350)
16	59.40(2.339)	63.7(2.508)
17	63.36(2.494)	67.6(2.661)
18	67.32(2.650)	71.6(2.819)
19	71.28(2.806)	75.5(2.972)
20	75.24(2.962)	79.5(3.130)

Halogen-Free
RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 3.96MM(.156") CRIMP TERMINAL HOUSING	MATERIAL:	FINISH:	DRAWING NO.	C15111SA	PART NO.	C151**S00DR
4													
3				DRAWN BY:	Eisley	07/19-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2			ENGINEER:	David	07/19-01'	.X ± 0.38/.015		.X' ± 1"					
1			CHECKED BY:	David	07/19-01'	.XX ± 0.25/.010		.X' ±					
			APPROVED BY:	Alex	07/19-01'	.XXX ± 0.10/.004		.XX' ±					
										SCALE	2 / 1	SHEET	1 OF 1

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.