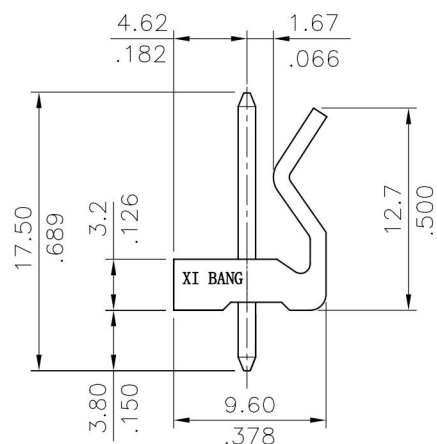
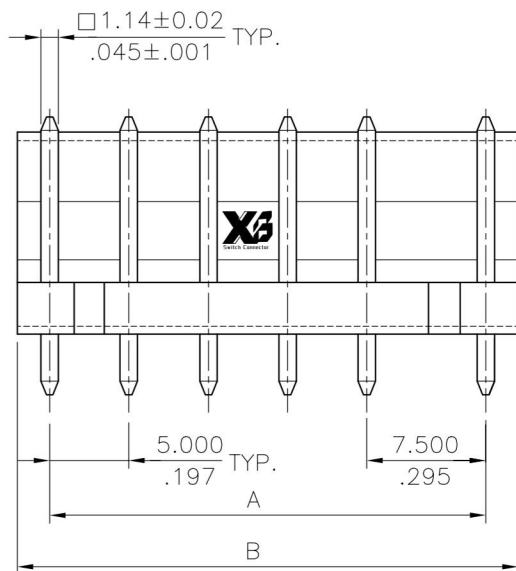


Recommended P.C. Board Layout

Material:

* Insulation: Nylon 66 UL 94V-2
Color Nature

* Contact: Brass

Circuits	Dimension	
	A	B
2	7.50(.295)	12.5(.492)
3	12.50(.492)	17.5(.689)
4	17.50(.689)	22.5(.886)
5	22.50(.886)	27.5(1.083)
6	27.50(1.083)	32.5(1.280)
7	32.50(1.280)	37.5(1.476)
8	37.50(1.476)	42.5(1.673)
9	42.50(1.673)	47.5(1.870)
10	47.50(1.870)	52.5(2.067)

Ordering Code:

CI56 ** P 1 V 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
② No. of Circuits: 02~10
③ Contact type: P= Pin header
④ Plating option:
1= 3.05μm(120μ) Min. Tin
over 0.76μm(30μ) Nickel
⑤ Tail Style: V= Straight
⑥ Option: 00= Standard

Tin-Lead Process

Halogen-Free

RoHS Compliant

4						DATE	UNIT: mm / inch	TITLE: 7.50-5.00MM (.295"-.197") STRAIGHT PIN HEADER	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
3				DRAWN BY:	Eager	10/03-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
2				ENGINEER:	Clark	10/05-07'	.X ± 0.38/.015	X' ± 1"		MATERIAL:	DRAWING NO.	CI5602SF	PART NO.	CI56**P1V00
1	Eager	10/03-07'	ECN07410	CHECKED BY:	Eisley	10/05-07'	.XX ± 0.25/.010	X" ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	10/05-07'	.XXX ± 0.15/.006	XX" ±						