


* Insulation: Nylon 66 UL 94V-2

* Contact: Brass

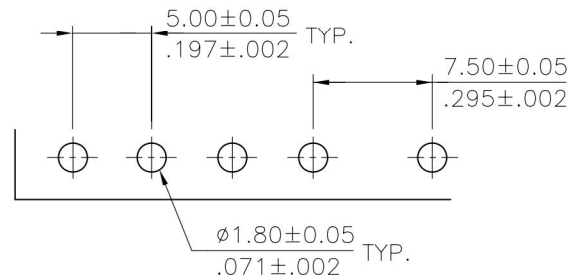

Ordering Code:

- ① Series No.
- ② No. of Circuits: 02~10
- ③ Contact type: P= Pin header
- ④ Plating option:
1= $3.05\mu\text{m}(120\mu'')$ Min. Tin
over $0.76\mu\text{m}(30\mu'')$ Nickel
- ⑤ Tail Style: H= Right angle
- ⑥ Option: 00= Standard

Halogen-Free

RoHS Compliant

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.

4						DATE	UNIT: mm / inch		TITLE: 7.50-5.00MM (.295"-.197") RIGHT ANGLE PIN HEADER	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
3				DRAWN BY:	Eager	10/03-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER:	Clark	10/05-07'	.X ± 0.38/.015	X.* ± 1"	MATERIAL:	DRAWING NO. CI5603SF
1	Eager	10/03-07'	ECN07410	CHECKED BY:	Eisley	10/05-07'	.XX ± 0.25/.010	.X.* ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	10/05-07'	.XXX ± 0.15/.006	.XX.* ±	SCALE 2 / 1	SHEET 1 OF 1