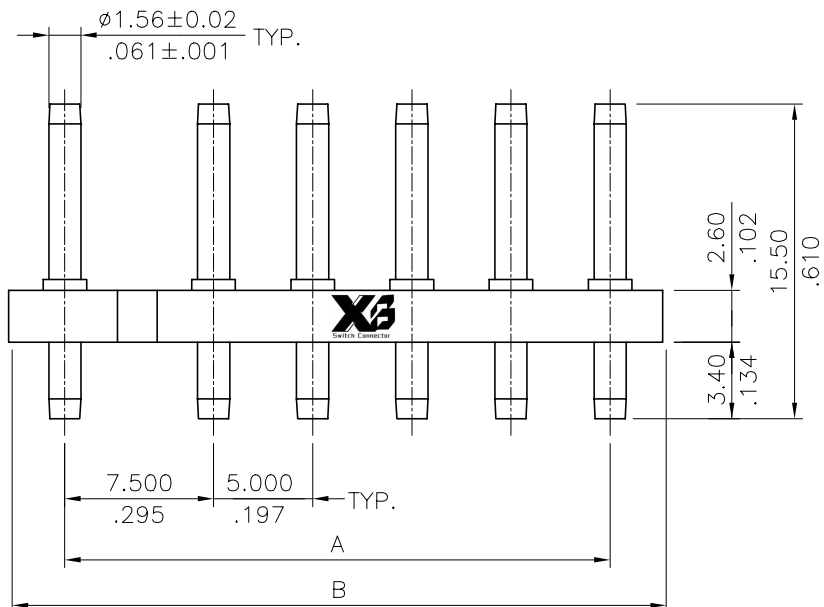



Recommended P.C. Board Layout

Material:

- * Insulation: Nylon 66 UL 94V-0
- * Contact: Brass with Tin plated

Ordering Code:

CI61 ** P 1 V 00
① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② NO. of Circuits: 02 to 06
- ③ P= Pin header
- ④ 1= 2.03μm(80μ") Min. Tin
over 0.76μm(30μ") Nickel
- ⑤ V= Straight
- ⑥ Option: 00= Color Nature(Standard)

Circuits	Dimension	
	A	B
2	7.50(.295)	12.5(.492)
3	12.50(.492)	17.5(.689)
4	17.50(.689)	22.5(.886)
5	22.50(.886)	27.5(1.083)
6	27.50(1.083)	32.5(1.280)

Tin-Lead Process

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 7.50-5.00mm(.295"- .197") STRAIGHT HEADERS	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.	
3				DRAWN BY:	Betty	09/24-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER:	David	09/24-01'		.X ± 0.38/.015 X." ± 1" .XX ± 0.25/.010 X." ±		
1				CHECKED BY:	David	09/24-01'	.XXX ± 0.15/.006 XX" ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	09/24-01'			MATERIAL:	DRAWING NO. CI6101SD
								FINISH:	SCALE 2 / 1	SHEET 1 OF 1