



Circuits	Dimension	
	A	B
2	5.08(.200)	10.1(.398)
3	10.16(.400)	15.2(.598)
4	15.24(.600)	20.5(.807)
5	20.32(.800)	25.3(.996)
6	25.40(1.00)	30.6(1.205)
7	30.48(1.20)	35.5(1.398)
8	35.56(1.40)	40.8(1.606)
9	40.64(1.60)	45.6(1.795)
10	45.72(1.80)	50.7(1.996)

Halogen-Free RoHS Compliant




4						DATE	UNIT: mm / inch		TITLE: 5.08MM(.200") CRIMP TERMINAL HOUSING	XGB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY:	Casey	03/18-05'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2	Casey	3/9/05'	ECR05015-0/ECN05067	ENGINEER:	Eisley	03/21-05'	.X ± 0.38/.015	X* ± 1"	FINISH:	
1	SUN	6/02/04'	ECR04051-0/ECN04222	CHECKED BY:	David	03/22-05'	.XX ± 0.25/.010	X* ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	03/22-05'	.XXX ± 0.15/.006	.XX* ±		
DRAWING NO.		CI5501SD		PART NO.		CI55**S0000				
SCALE		3 / 1		SHEET		1 OF 1				

Material: Nylon 66 UL 94V-2
Color Nature

Ordering Code:

CI55 04 S 000R
① ② ③ ④

- ① Series No.
② No. of Circuits
③ S=Connector housing
④ option:
000R=Without Rid

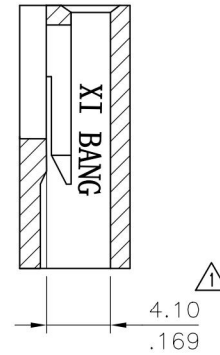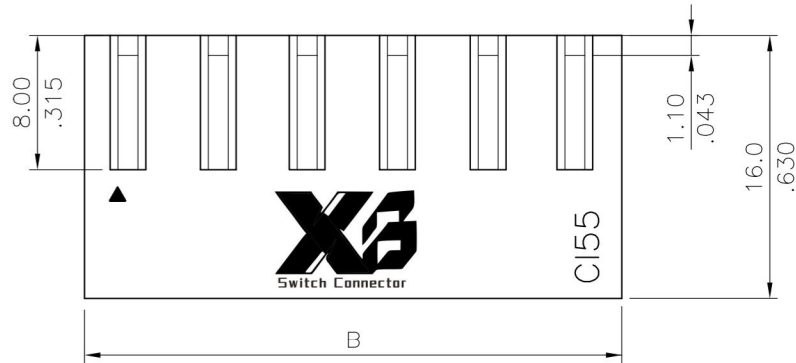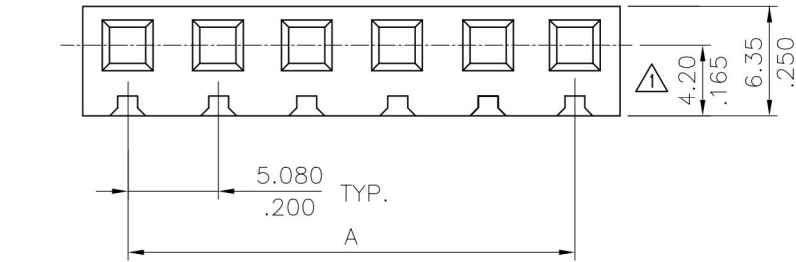

Circuits	Dimension	
	A	B
2	5.08(.200)	10.1(.398)
3	10.16(.400)	15.2(.598)
4	15.24(.600)	20.5(.807)
5	20.32(.800)	25.3(.996)
6	25.40(1.00)	30.6(1.204)
7	30.48(1.20)	35.5(1.397)
8	35.56(1.60)	40.6(1.606)
9	40.64(1.40)	45.6(1.795)
10	45.72(1.80)	50.7(1.996)

RoHS Compliant

④					DATE	UNIT: mm / inch		TITLE: 5.08MM(.200") HOUSING WITHOUT RIB	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.	
③				DRAWN BY: Casey	03/15-05'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:
②				ENGINEER: Eisley	03/16-05'	.X ± 0.38/.015	X' ± 1'	FINISH:		
①	Casey	3/9/05'	ECN05067/ECR05015-0	CHECKED BY: David	03/22-05'	.XX ± 0.25/.010	.X' ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	03/22-05'	.XXX ± 0.15/.006	.XX' ±		DRAWING NO. CI5504SD	PART NO. CI55**S000R
									SCALE 4 / 1	SHEET 1 OF 1

Notes:


1. Material:
Nylon 6 UL 94V-2 Color Nature

- 1 2. Glow wire requirement:
IEC 60695-2-12 GWFI 960°C@0.38mm & 930°C@0.75mm & 960°C@1.50mm & 960°C@3.00mm
IEC 60695-2-11 GWEPT 750°C ≤2S

Ordering Code:

CI55 ** S 000M
① ② ③ ④

- ① Series No.
② No. of Circuits
③ S=Connector housing
④ Other option: 000M= Standard
(Glow wire available)

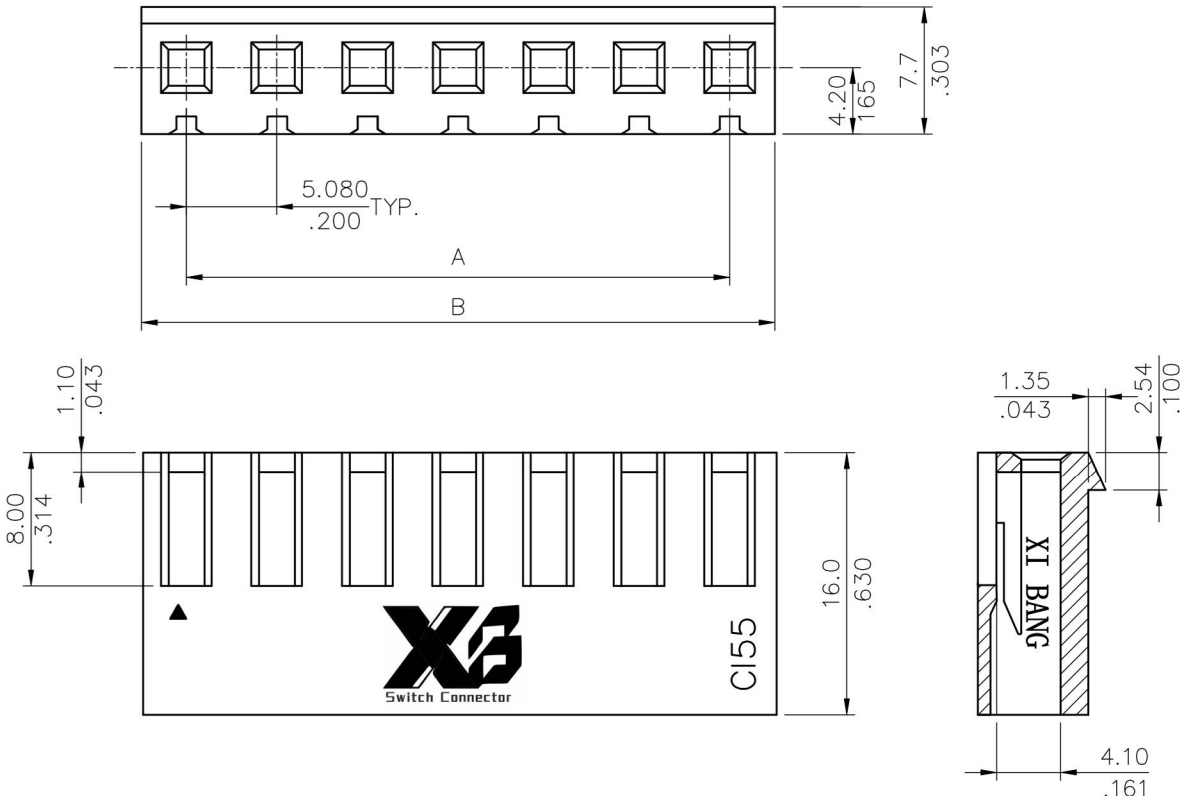

Circuits	Dimension	
	A	B
2	5.08(.200)	10.1(.398)
3	10.16(.400)	15.2(.598)
4	15.24(.600)	20.5(.807)
5	20.32(.800)	25.3(.996)
6	25.40(1.00)	30.6(1.205)
7	30.48(1.20)	35.5(1.398)
8	35.56(1.40)	40.8(1.606)
9	40.64(1.60)	45.6(1.795)
10	45.72(1.80)	50.7(1.996)

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 5.08MM(.200") CRIMP TERMINAL HOUSING	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
3				DRAWN BY: Kenny	8/26-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
2				ENGINEER: Sun	9/1-20'	.X ± 0.38/.015 X' ± 1"	FINISH:	
1	Kenny	8/26-20'	ECNT120227	CHECKED BY: Eisley	9/4-20'	.XX ± 0.25/.010 X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	9/4-20'	.XXX ± 0.15/.006 .XX' ±		DRAWING NO. CI5514SB PART NO. CI55**S000M
								SCALE 3 / 1 SHEET 1 OF 1

Notes:

- Material: Nylon 6 UL 94V-2
Color Nature

① 2. Glow wire requirement:




IEC 60695-2-12 GWFI 960°C@0.38mm & 930°C@0.75mm & 960°C@1.50mm & 960°C@3.00mm

IEC 60695-2-11 GWEPT 750°C ≤2S

Ordering Code:

CI55 ** S 000N
① ② ③ ④

- ① Series No.
② No. of Circuits
③ S= Connector housing
④ Option: 000N= Without Rib
(Glow wire available)

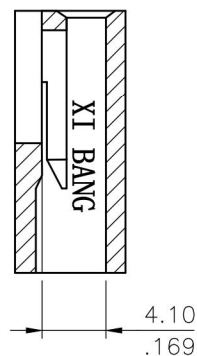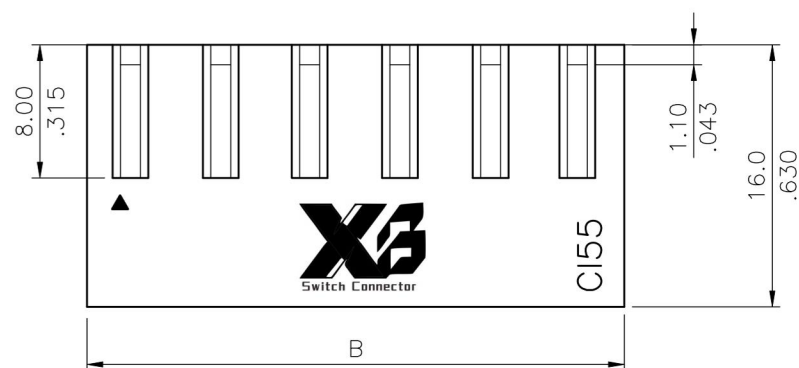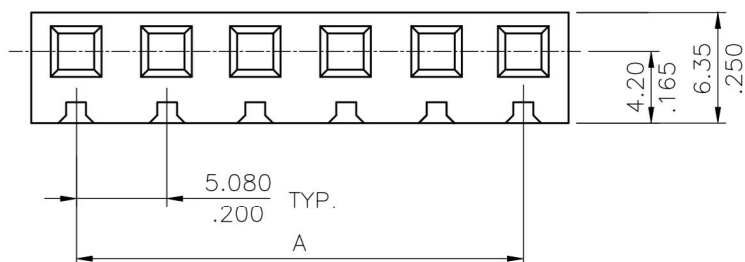

Circuits	Dimension	
	A	B
2	5.08(.200)	10.1(.398)
3	10.16(.400)	15.2(.598)
4	15.24(.600)	20.5(.807)
5	20.32(.800)	25.3(.996)
6	25.40(1.00)	30.6(1.204)
7	30.48(1.20)	35.5(1.397)
8	35.56(1.60)	40.6(1.606)
9	40.64(1.40)	45.6(1.795)
10	45.72(1.80)	50.7(1.996)

RoHS Compliant

④					DATE	UNIT: mm / inch		TITLE: 5.08MM(.200") HOUSING WITHOUT RIB	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
③				DRAWN BY: Kenny	8/26-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
②				ENGINEER: Sun	9/1-20'	.X ± 0.38/.015	X' ± 1"	MATERIAL:		
①	Kenny	8/26-20'	ECNT120227	CHECKED BY: Eisley	9/4-20'	.XX ± 0.25/.010	X" ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	9/4-20'	.XXX ± 0.15/.006	.XX' ±	FINISH:	DRAWING NO. CI5517SB	PART NO. CI55**S000N
									SCALE 4 / 1	SHEET 1 OF 1