
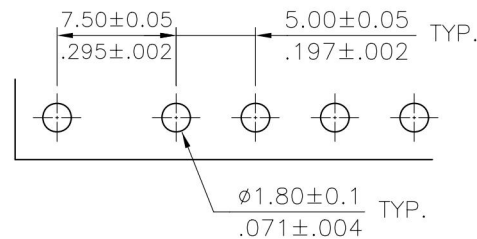
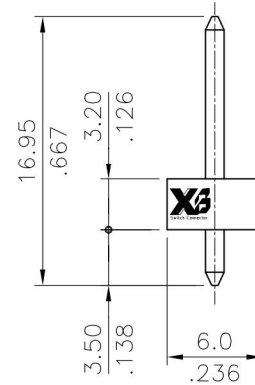


Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Brass

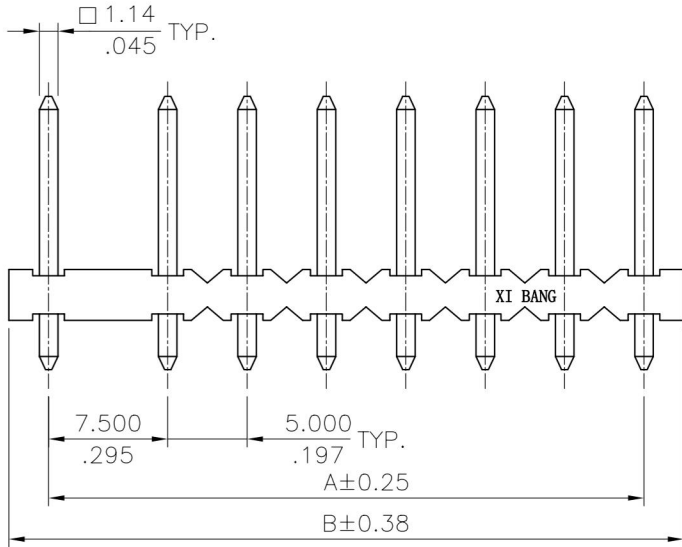

A = 5.00 * No. of Spaces + 2.50
 B = A + 5.00
 * Available in 2 through 20 circuits

Ordering Code:

CI79 ** P 1 V *0
 ① ② ③ ④ ⑤ ⑥

- ① Series No.
CI79= 7.5-5.0mm center spacing
- ② No. of Circuits
- ③ Contact type: P= Pin header
- ④ Plating option:
 1= 3.05 μ m(120 μ ") Min. Tin
 over 0.76 μ m(30 μ ") Nickel
 2= Gold flash plated over
 1.27 μ m(50 μ ") Nickel
 3= 0.38 μ m(15 μ ") Gold plated
 over 1.27 μ m(50 μ ") Nickel
 4= 0.76 μ m(30 μ ") Gold plated
 over 1.27 μ m(50 μ ") Nickel
- ⑤ Tail Style: V= Straight
- △ ⑥ Option: 00= Color White(Nature)
 10= Color Black

Recommended P.C. Board Layout

Tin-Lead Process RoHS Compliant

| | | | | | | | |
|-----|------|----------|-----------|--------------|--------|-----------------|---|
| ④ | | | | | DATE | UNIT: mm / inch | TITLE: 7.50-5.00MM(.295"-.197") BOARD MOUNT PIN HEADER |
| ③ | | | | DRAWN BY: | Sun | 08/10-04' | TOLERANCE UNLESS OTHERWISE SPECIFIED |
| ② | | | | ENGINEER: | Eisley | 08/10-04' | |
| ① | SUN | 8/10/04' | ECN04305 | CHECKED BY: | David | 08/10-04' | MATERIAL: |
| SYM | NAME | DATE | REVISIONS | APPROVED BY: | Alex | 08/10-04' | FINISH: |
| | | | | | | | .X ± 0.38/.015 X' ± 1' |
| | | | | | | | .XX ± 0.25/.010 X' ± |
| | | | | | | | .XXX ± 0.15/.006 .XX' ± |

| | | | |
|---|----------|----------|-------------|
|  东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD. | | | |
| DRAWING NO. | CI7901SD | PART NO. | CI79**P1V*0 |
| SCALE | 2 / 1 | SHEET | 1 OF 1 |