

Material:

\* Insulation: Nylon 66,Color Nature

\* Contact: Phosphor Bronze

Ordering Code:

CI93 \*\* S 1 000  
 ① ② ③ ④ ⑤

① Series No.

② No. of Circuits

③ S= Connector Housing

④ Plating option:


1= 3.05μm(120μ") Min. Tin

over 0.76μm(30μ") Nickel

⑤ Other option: 000= UL 94V-0(Standard)

00M= UL 94V-2

Circuits	Dimension		
	A	B	C
3	5.00(.197)	10.1(.398)	8.20(.324)
4	7.50(.295)	12.6(.496)	10.70(.421)
5	10.00(.394)	15.1(.594)	13.20(.520)
6	12.50(.492)	17.6(.693)	15.70(.618)
7	15.00(.591)	20.1(.791)	18.20(.716)
8	17.50(.689)	22.6(.890)	20.70(.815)
9	20.00(.787)	25.1(.988)	23.20(.913)
10	22.50(.886)	27.6(1.087)	25.70(1.012)

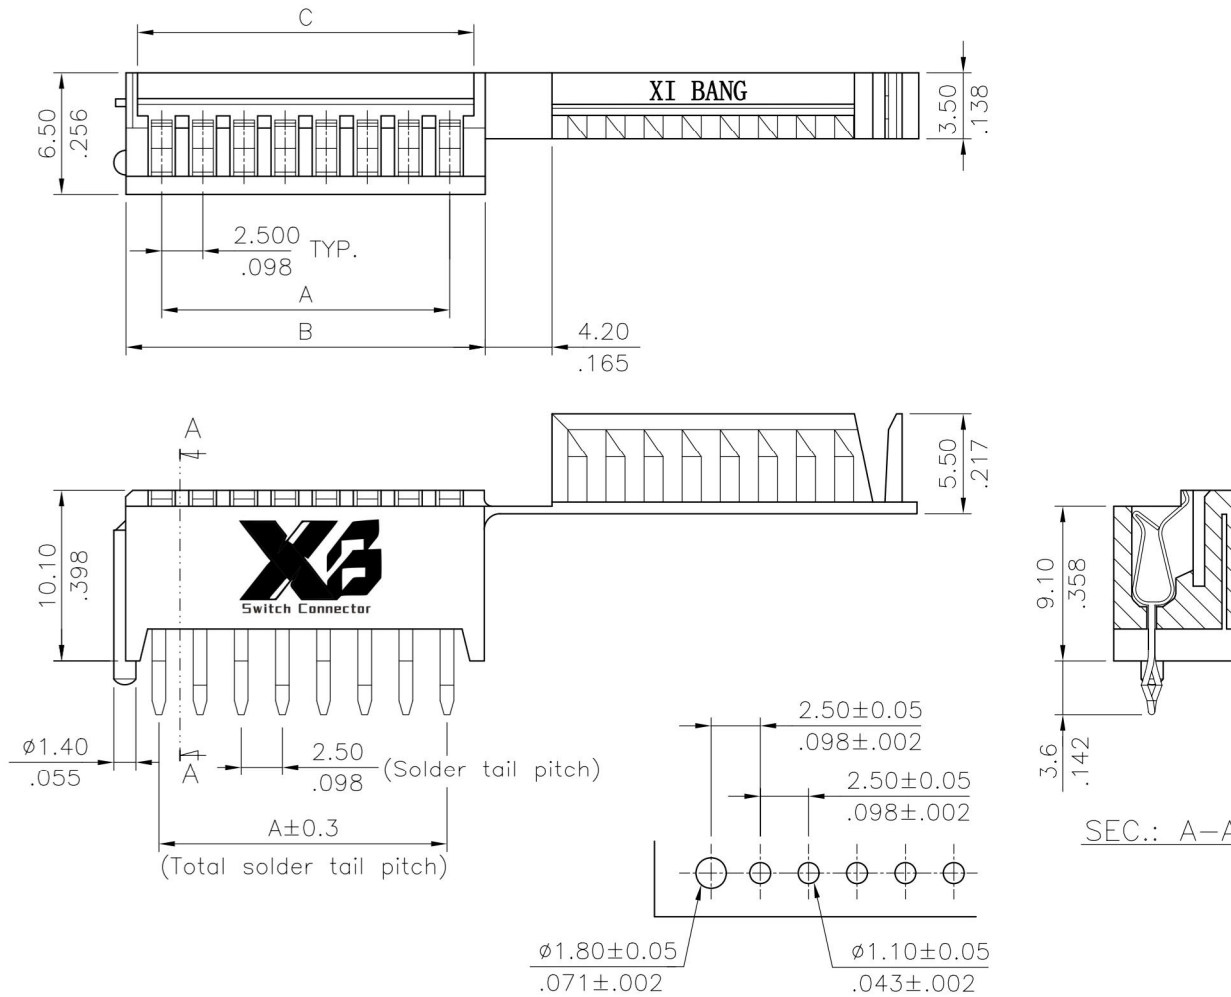

Recommended P.C. Board Layout

Halogen-Free

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 2.50MM(.098") RIBBON WIRE TRAP CONNECTOR
④							
③				DRAWN BY:	Eisley	02/01-02'	TOLERANCE UNLESS OTHERWISE SPECIFIED
②				ENGINEER:	David	02/01-02'	
①				CHECKED BY:	David	02/01-02'	FINISH:
				APPROVED BY:	Alex	02/01-02'	

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			
DRAWING NO.	CI9301SF	PART NO.	CI93**S1000 CI93**S100M
SCALE	2 / 1	SHEET	1 OF 1